超特®



产品画册

常州市超特焊割设备有限公司

CHANGZHOU CHAOTE WELDING CUTTING EQUIPMENT CO.,LTD.

大品牌 / 高质量 / 中国造

BIG BRAND HIGH QUALITY MADE IN CHINA

企业介绍 ABOUT



企业介绍 ENTERPRISE

常州市超特焊割设备有限公司是专业生产焊割炬及配件的制造商。公司技术力量雄厚，并经过十多年的摸索和创新，以不断改进工艺和先进的数控机床加工来保证产品质量的稳定性。现和国内多家焊割厂建立合作供货关系。部分仿进口等离子配件（松下，创菲美，OTC 系列）已批量出口到欧亚各国，质量受到认可。

公司产品：空气等离子割枪及配件，硅橡胶氩弧焊枪及配件，二氧化碳焊枪等国际通用配件。

公司以产品质量为生命，快速的供货时间，优惠的价格为宗旨，热忱欢迎国内外朋友光临指导。

Changzhou Chaote Welding & Cutting Equipment Co., Ltd. is a specialized manufacturer of welding and cutting torches and accessories. With strong technical capabilities and over a decade of exploration and innovation, the company ensures product quality stability through continuous process improvement and advanced CNC (Computer Numerical Control) machine tool processing. It has established cooperative supply relationships with numerous domestic welding and cutting factories.Part of its imitated imported plasma accessories (Panasonic, Trafimet, OTC series) have been mass-exported to European and Asian countries, with their quality widely recognized.

Company Products:

Air plasma cutting torches and accessories, silicone rubber TIG welding torches and accessories, CO2 welding torches, and other internationally universal accessories.

Company Tenet:

Taking product quality as the lifeblood, adhering to fast delivery time and preferential prices as the core principles, we warmly welcome friends from home and abroad to visit and guide us.


目录 CONTENT

- 公司简介 01
- 等离子切割枪 03
- 等离子切割枪配件 27
- 二氧化碳气保焊焊枪 30
- 氩弧焊焊枪 77

等离子切割枪 CB50

PLASMA CUTTING TORCH CB50



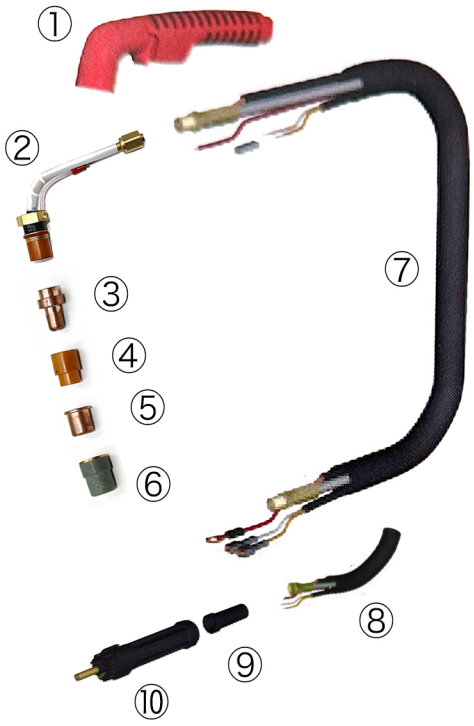

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
CB50 等离子切割枪 6M,1/8G 接头 Plasma ERGOCUT CB 50 troch 6m,1/8G	1
CB50 等离子切割枪 6M, 中央插头 Plasma ERGOCUT CB 50 troch 6m central adaptor	1

技术参数 Technical Data


电压等级 Voltage class	M
标准长度 Standard length m	6
空气流量 Air consumption	165 l/min
空气压力 Air pressure	5bar
暂载率 60% Duty cycle 60%	50A
暂载率 100% Duty cycle 100%	40A

No.	Description
1	切割枪 CB50/70 系列手柄 Ergocut CB50/70 handle
2	CB50 枪头 Torch head CB50
3	CB50 电极 Electrode-Hf.CB50 020103/152-H
4	CB50 涡流环 Air-diffuser CB50
5	CB50 电极喷嘴 Tip CB50
6	CB50 外喷嘴 Outside nozzle CB50
7	控制线 Control cable per meter
8	6 米电缆组 , 中央插头 Cable assembly 6m central adaptor
9	电缆保护套 Cable Sepport
10	中央插头 Male central adaptor



等离子切割枪 CB70

PLASMA CUTTING TORCH CB70

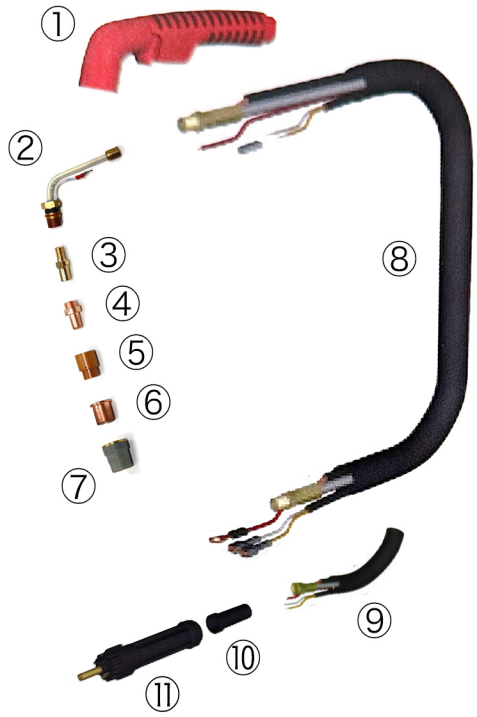

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
CB70 等离子切割枪 6M,1/8G 接头 Plasma ERGOCUT CB 70 troch 6m,1/8G	1
CB70 等离子切割枪 6M, 中央插头 Plasma ERGOCUT CB 70 troch 6m central adaptor	1

No.	Description
1	切割枪 CB50/70 系列手柄 Ergocut CB50/70 handle
2	CB70 枪头 Torch head CB70
3	分流器 Diffuser
4	CB70 电极 Electrode-Hf.CB70 020103/152-H
5	CB70 涡流环 Air-diffuser CB50
6	CB70 电极喷嘴 Tip CB50
7	CB70 外喷嘴 Outside nozzle CB50
8	控制线 Control cable per meter
9	6 米电缆组 , 中央插头 Cable assembly 6m central adaptor
10	电缆保护套 Cable Sepport
11	中央插头 Male central adaptor


技术参数 Technical Data

电压等级 Voltage class	M
标准长度 Standard length m	6
空气流量 Air consumption	170 l/min
空气压力 Air pressure	5bar
暂载率 60% Duty cycle 60%	70A
暂载率 100% Duty cycle 100%	50A

等离子切割枪 CB150

PLASMA CUTTING TORCH CB150



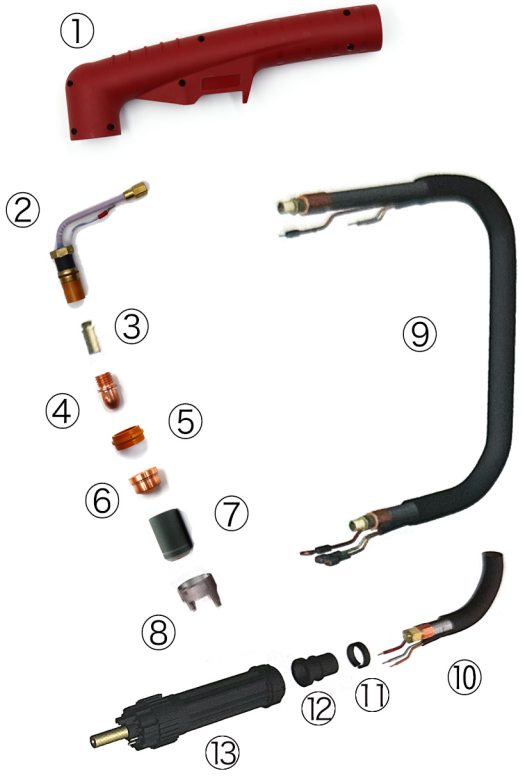


技术参数 Technical Data

电压等级 Voltage class	M
标准长度 Standard length m	6
空气流量 Air consumption	200 l/min
空气压力 Air pressure	5bar
暂载率 60% Duty cycle 60%	150A
暂载率 100% Duty cycle 100%	110A

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
CB150 等离子切割枪 6M,1/8G 接头 Plasma ERGOCUT CB150 troch 6m,1/8G	1
CB150 等离子切割枪 6M, 中央插头 Plasma ERGOCUT CB150 troch 6m central adaptor	1

No.	Description
1	切割枪手柄 Ergocut A81/101/141/151 handle
2	枪头 Torch head ERGOCUT CB 150
3	分流器 Diffuser 1378
4	电极 Electrode - Hf.(1376)
5	分流器 Air diffuser CB 100/150(1377)
6	Φ1,6 电极喷嘴 Tip Φ1,6(1373)
7	接触式喷嘴 Contact cutting nozzle long life CB150
8	两爪隔离簧 TWo pins crown shield
9	6 米 气电缆组 Cable assembly 6m
10	6 米 气电缆组 Cable assembly 6m
11	电缆支撑件 Cable Support
12	电缆支撑件 Cable Support
13	中央插头 Male central adaptor

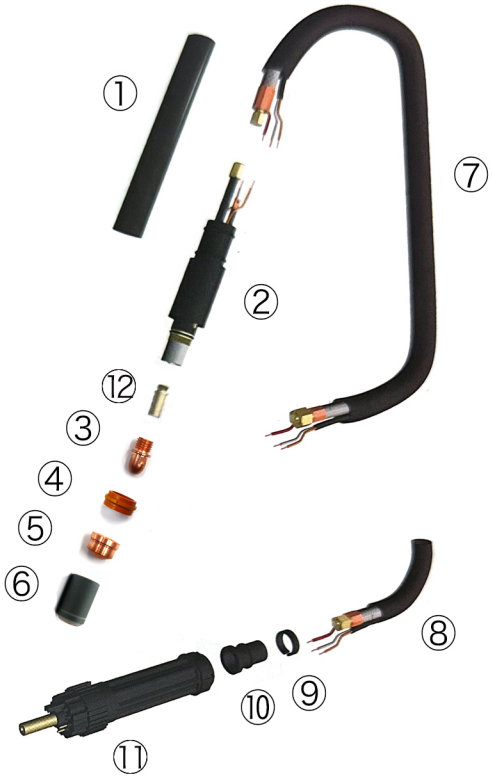

等离子切割枪 CB150

PLASMA CUTTING TORCH CB150

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
CB150 等离子切割枪 6M,1/8G 接头 Plasma ERGOCUT CB150 troch 6m,1/8G	1
CB150 等离子切割枪 6M, 中央插头 Plasma ERGOCUT CB150 troch 6m central adaptor	1

No.	Description
1	自动切割枪手柄 Handle
2	CB150P 枪头 Torch head CB150P
3	电极 Electrode(1376)
4	分流器 Air difuser CB100/150(1377)
5	Φ1.6 电极喷嘴 TpΦ1.6(1373)
6	外喷嘴 Outside nozzle CB150(1389)
7	6 米电缆组 Cable Assembly 6m
8	6 米电缆组中央插头 Cable assembly 6m central adaptor
9	电缆锁紧环 Ring Cable Support
10	电缆支撑环 Cable Support
11	中央插头 Male centml adaptor
12	分流器 Difuser

技术参数 Technical Data


Standard Length(标准长度)	5M
Air Pressure (工作气压)	4.5-5.5bar
Duy Cycle 60%(60% 暂载率)	60A

No.	Description
	CB150 Complete Torch CB150 整枪
	CB150 Torch Head With Handle CB150 枪头及手把
1	Gas Cooling Tube 气冷却管
2	Electrode 电极
3	Swin Ring 涡流环
4	Nozzle 喷嘴
5	Cable Assembly 电缆组
6	Central Adaptor 中央插头

等离子切割枪 PT-60

PLASMA CUTTING TORCH PT-60



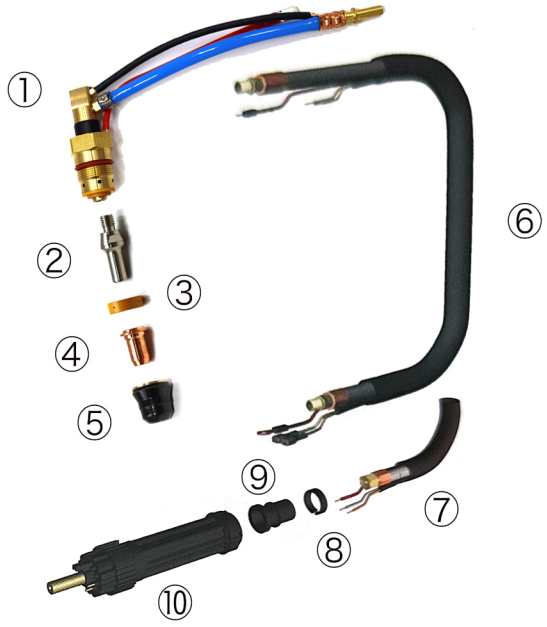

技术参数 Technical Data

工作气压 Air Pressure	4.5-5.5 bar
暂载率 60% Duty Cycle 60%	60A

切割枪整枪 Complete Torch

Description
等离子切割枪 PT-60/6 米 1/4G Plasma Torch PT-60/6M 1/4G
等离子切割枪 PT-60/6 米 中央插头 Plasma Torch PT-60/6M Central Adaptor

部件 Parts

No.	Description
1	等离子枪头 PT-60 Plasma Torch Head PT-60
2	加长等离子电极 PT25-40 Extended Electrode Plasma PT25-40
3	分流器 PT25-60 Diffuser PT25-60
4	电极喷嘴Φ0.6mm/PT25-60/10-20A Tip Φ0.6mm/PT25-60/10-20A
5	外喷嘴 Outside Nozzle
6	6 米 气电缆组 Cable assembly 6m
7	6 米 气电缆组 Cable assembly 6m
8	电缆支撑件 Cable Support
9	电缆支撑件 Cable Support
10	中央插头 Male central adaptor



等离子切割枪 PT80

PLASMA CUTTING TORCH PT80

技术参数 Technical Data

工作气压 Air Pressure	4.5-5.5 bar
暂载率 60% Duty Cycle 60%	80A

切割枪整枪 Complete Torch

Description	Order
等离子切割枪 /PT80/6 米 1/4G/ 后引弧 Plasma Torch PT80/6M 1/4G/Back Striking	35100061002
等离子切割枪 PT80/12 米 1/4G/ 后引弧 Plasma Torch PT80/12M 1/4G/Back Striking	35100121002
等离子切制枪 /PT80/6 米 / 中央插头 / 后引弧 Plasma Torch PT80/6MCentral Adaptor/Back Striking	35100061003
等尊离子切制枪 /PT80/12 米 / 中央播头 / 后引弧 Plasma Torch PT80/12M/CentralAdaptor/Back Striking	35100121003

部件 Parts

No.	Description
1	等离子枪头 PT80 Plasma Torch Head PT80
2	加长等离子电极 PT25-40 Extended Electrode Plasma PT25-40
3	分流器 PT25-60 Diffuser PT25-60
4	电极喷嘴Φ0.6mm/PT25-60/10-20A Tip Φ0.6mm/PT25-60/10-20A
5	外喷嘴 Outside Nozzle
6	6 米 气电缆组 Cable assembly 6m
7	6 米 气电缆组 Cable assembly 6m
8	电缆支撑件 Cable Support
9	电缆支撑件 Cable Support
10	中央插头 Male central adaptor

等离子切割枪 PT100

PLASMA CUTTING TORCH PT100





技术参数 Technical Data

工作气压 Air Pressure	4.5-5.5 bar
暂载率 60% Duty Cycle 60%	100A

切割枪整枪 Complete Torch

Description	Order
等离子切割枪 /PT100/6 米 1/4G/ 后引弧 Plasma Torch EPT100/6M 1/4G/Back Striking	35100061002
等离子切割枪 /PT100/12 米 1/4G/ 后引弧 Plasma Torch PT100/12M 1/4G/Back Striking	35100121002
等离子切割枪 /PT100/6 米 / 中央插头 / 后引弧 Plasma Torch PT100/6M/Central Adaptor/Back Striking	35100061003
等离子切割枪 /PT100/12 米 / 中央插头 / 后引弧 Plasma Torch EPT100/12M/Central Adaptor/Back Striking	35100121003

部件 Parts


No.	Description
1	等离子枪头 PT100 Plasma Torch Head PT100
2	等离子电极 /PT100 Electrode Plasma PT100
3	分流器 Diffuser
4	电极喷嘴Φ1.4mm/80-90 后引弧 Tip Φ1.4mm/80-90VBack Striking
5	外喷嘴 Outside Nozzle

No.	Description
6	6 米 气电缆组 Cable assembly 6m
7	6 米 气电缆组 Cable assembly 6m
8	电缆支撑件 Cable Support
9	电缆支撑件 Cable Support
10	中央插头 Male central adaptor



等离子切割枪 S-45

PLASMA CUTTING TORCH S-45

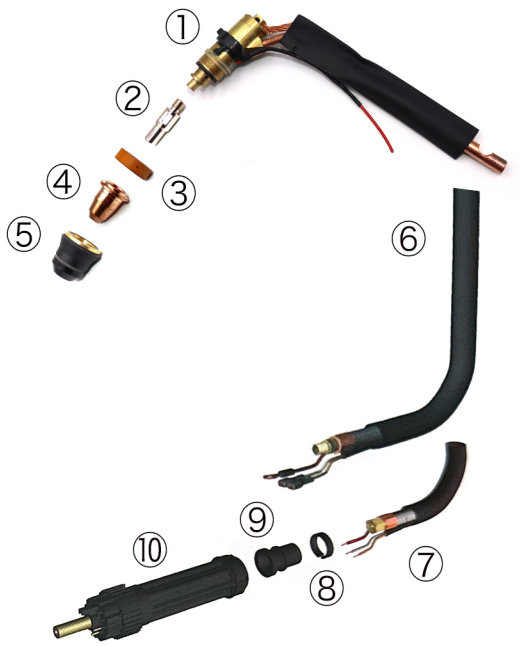

技术参数 Technical Data

电压等级 Voltage class	M
标准长度 Standard length m	4/6
空气流量 Air consumption	115 l/min
空气压力 Air pressure	5bar
暂载率 60% Duty cycle 60%	40A
空气转换压力 Air pressure switch	⩾3.5bar

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
S45 等离子切割枪 6 米 ,1/4G 接头 Phsma S45 torch 6m,1/4G	1
S45 等离子切割枪 6 米 , 中央插头 Plasma S45 torch 6m,central adaptor	1
S45 等离子切割枪 4 米 ,1/4G 接头 Plasma S45 torch 4m,1/4G with separate voltage	1
S45 切割枪 6 米 , 安全开关 ,1/4 接头 Plasma S45 torch 6m,safety trigger,1/4G	1
S45 切割枪 6 米， 安全开关 , 中央插头 Plasma S45 troch 6m,safety trigger,central adaptor	1
S45 切割枪 4 米 , 安全开关 ,1/4G S 接头 Plasma S45 troch 4m,safety trigger,1/4G S	1

部件 Parts


No.	Description
1	S45 枪头 Torch head s45
2	S54 长电极 Long electrode s54
3	涡流环 S25/S30/S54 Air difuser s25/S30/S45
4	长电极喷嘴Φ0.8 Long Tip Φ0.8
5	S45 外喷嘴 Outside nozzle S45

No.	Description
6	6 米 气电缆组 Cable assembly 6m
7	6 米 气电缆组 Cable assembly 6m
8	电缆支撑件 Cable Support
9	电缆支撑件 Cable Support
10	中央插头 Male central adaptor

等离子切割枪 S-75

PLASMA CUTTING TORCH S-75



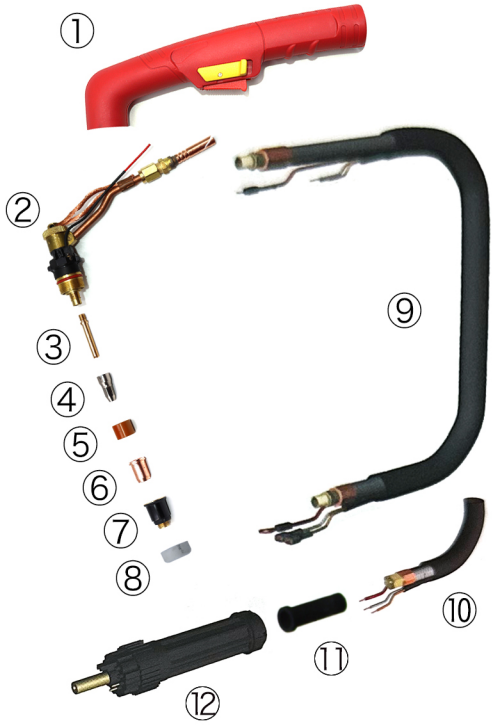


技术参数 Technical Data

电压等级 Voltage class	M
标准长度 Standard length m	6
空气流量 Air consumption	150 l/min
空气压力 Air pressure	5bar
暂载率 60% Duty cycle 60%	70A
暂载率 100% Duty cycle 100%	50A

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
S75 等离子切割枪 6M,3/8G 接头 PLasma ERGOCUT Torch S75 6m 3/8G	1
S75 等离子切割枪 6, 中央接头 PLasma ERGOCUT Torch S75 6m central adaptor	1
S75 等离子切割枪 6M,1/4G 接头 PLasma ERGOCUT Torch S75 6m 1/4G	1

No.	Description
1	切割枪 S/A/CB 系列手柄 ERGOCUT S/A/CB kit handle
2	S75 枪头 Torch head ERGOCUT S75
3	分流器 Diffuser
4	S75/S74/S105 电极 Electrode S74-75-105
5	涡流环 S75/S105 Air diffuser S75/S105
6	电极喷嘴Φ1.0 S74-75 Long Tip Φ1.0 S74-75
7	S75 外喷嘴 Outside nozzle S75
8	陶瓷隔离簧 Stand off guide
9	3/8G 6 米 气电缆管 Air-power cable 6m 3/8G
10	1/4G 6 米 电缆组 Cable assembly 6m 1/4G
11	支撑件 Cable Support
12	中央插头 Male central adaptor

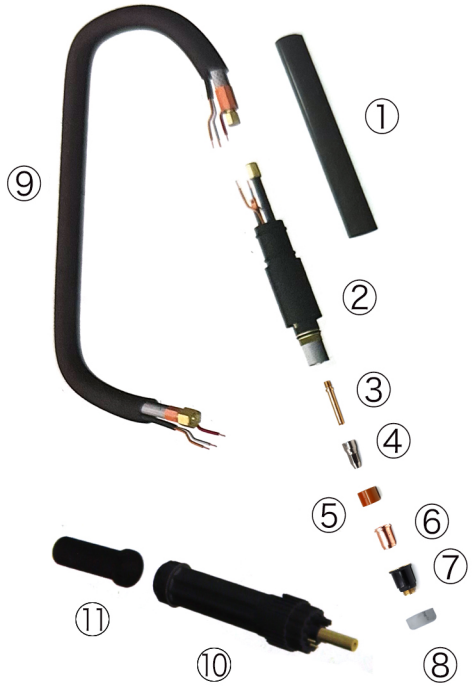

等离子切割枪 S-75

PLASMA CUTTING TORCH S-75

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
S75 等离子切割枪 6M, 中央接头 PLasma ERGOCUT Torch S75 6m central adaptor	1
S75 等离子切割枪 6M,1/4G 接头 PLasma ERGOCUT Torch S75 6m 1/4G	1

技术参数 Technical Data


电压等级 Voltage class	M
标准长度 Standard Length	6
空气流量 Air consumption	150l/min
空气压力 Air pressure	5bar
暂载率 60% Duty cycle 60%	70A
暂载率 100% Duty cycle 100%	50A

No.	Description
1	手柄 Handle
2	S75 枪头 Torch head ERGOCUT S75
3	分流器 Difuser
4	S75 电极 Electrode S75
5	涡流环 S75 Air difuser S75
6	电极喷嘴Φ1.0 S75 Long Tip Φ1.0 S75
7	S75 外喷嘴 Outside nozzle S75
8	陶瓷隔离簧 Stand off guide
9	1/4G 6 米 电缆组 Cable assembly 6m 1/4G
10	中央插头 Male central adaptor
11	支撑件 Cable Support



等离子切割枪 S-105

PLASMA CUTTING TORCH S-105

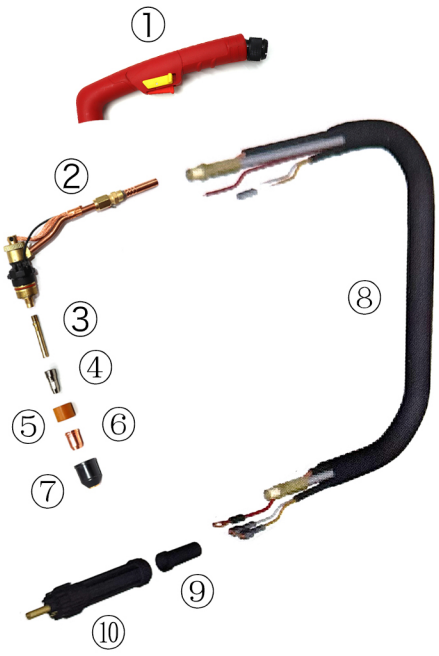

切割枪整枪 Complete Torch

产品名称 Description	最小包装 Pack
S105 等离子切割枪 6M, 中央接头 PLasma ERGOCUT Torch S105 6m central adapt	1
S105 等离子切割枪 6M,1/4G 接头 PLasma ERGOCUT Torch S105 6m1/4G	1

技术参数 Technical Data

电压等级 Voltage class	M
标准长度 Standard length m	6
空气流量 Air consumption	180 l/min
空气压力 Air pressure	5bar
暂载率 60% Duty cycle 60%	100A
暂载率 100% Duty cycle 100%	70A

No.	Description
1	切割枪手柄 Ergocut handle
2	S105 枪头 Torch head ERGOCUT S105
3	分流器 Diffuser
4	S75/S74/S105 电极 Eledrode S74-75-105
5	涡流环 S75/S105 Air difuser S75/S105
6	S105 外喷嘴 Outside nozzle S75
7	S105 外喷嘴 Outside nozzle S75
8	1/4G 电缆组 A81 Cabie assembly 6m 1/4G A81
9	支撑件 Cabie Support
10	中央插头 Male central adaptor

等离子切割枪 越洋 100

PLASMA CUTTING TORCH YUEYANG 100



No.	Description
1	切割枪手柄 Ergocut handle
2	越洋 100 枪头 Torch head ERGOCUT YueYang100
3	分流器 Diffuser
4	越洋 100 电极 Eledrode YueYang100
5	越洋 100 外喷嘴 Outside nozzle YueYang100
6	陶瓷隔离簧 Stand off guide
7	切割枪手柄 Ergocut handle

等离子切割枪 越洋 315

PLASMA CUTTING TORCH YUEYANG315



No.	Description
1	切割枪手柄 Ergocut handle
2	越洋 315 枪头 Torch head ERGOCUT YueYang315
3	分流器 Diffuser
4	越洋 315 电极 Eledrode YueYang315
5	越洋 315 外喷嘴 Outside nozzle YueYang315
6	陶瓷隔离簧 Stand off guide



等离子切割枪 AG60

PLASMA CUTTING TORCH AG60



技术参数 Technical Data

Standard Length(标准长度)	5M
Air Pressure (工作气压)	4.5-5.5bar
Duy Cycle 60%(60% 暂载率)	60A

No.	Description
	AG-60 Complete Torch AG-60 整枪
	AG-60-55 Torch Head With Handle AG-60 枪头及手把
1	AG-60 Hand Torch Head AG-60 手动枪头
2	Electrode 电极
3	Nozzle 喷嘴
4	Shield 保护罩
5	Handle 手把
6	Cable Assembly 电缆组

等离子切割枪 FY100

PLASMA CUTTING TORCH FY100




No.	Description
1	切割枪手柄 Ergocut handle
2	FY100 枪头 Torch head ERGOCUT FY100
3	分流器 Diffuser
4	FY100 电极 Eledrode FY100
5	FY100 外喷嘴 Outside nozzle FY100
6	陶瓷隔离簧 Stand off guide
7	切割枪手柄及枪头 Torch Head With Handle

等离子切割枪 FY160

PLASMA CUTTING TORCH FY160



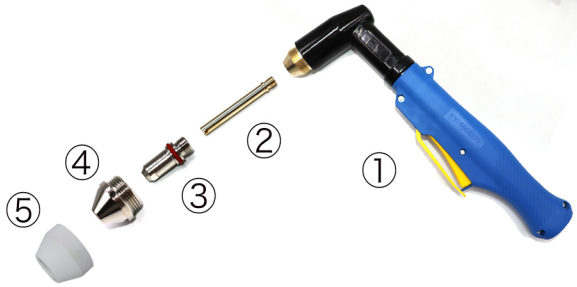



No.	Description
1	FY160 枪头及手把 Torch Head With Handle FY160
2	分流器 Diffuser
3	FY160 电极 Eledrode FY160
4	FY160 外喷嘴 Outside nozzle FY160
5	陶瓷隔离簧 Stand off guide

等离子切割枪 FY250

PLASMA CUTTING TORCH FY250



No.	Description
1	切割枪手柄及枪头 Ergocut handle and Torch head ERGOCUT
2	分流器 Diffuser
3	电极 Eledrode
4	外喷嘴 Outside nozzle
5	陶瓷隔离簧 Stand off guide



等离子切割枪 P80

PLASMA CUTTING TORCH P80





易损件 Wear Parts



No.	Description
1	P80 枪头及手把 Torch Head With Handle P80
2	电极 Electrode
3	喷嘴 Nozzle
4	普通保护罩 Normal Shield
5	导向轮 Site Wheel

技术参数 Technical Data

标准长度 Standard length	5M
工作气压 Air pressure	4.5-5.5 bar
暂载率 60% Duty cycle 60%	100A
暂载率 100% Duty cycle 100%	63A

等离子切割枪 P160

PLASMA CUTTING TORCH P160





技术参数 Technical Data


标准长度 Standard length	5M
工作气压 Air pressure	4.5-5.5 bar
暂载率 100% Duty cycle 100%	160A

No.	Description
1	P-160 枪头及手把 P-160 Torch Head Wit Handle
2	P-160 手把 P-160 Wit Handle
3	P-160 枪头 P-160 Torch Head
4	水冷却管 Water Cooling Tube
5	电极 Electrode
6	喷嘴 Nozzle
7	保护罩 Shield
8	导向轮 Site Wheel



等离子切割枪 PT-31

PLASMA CUTTING TORCH PT-31

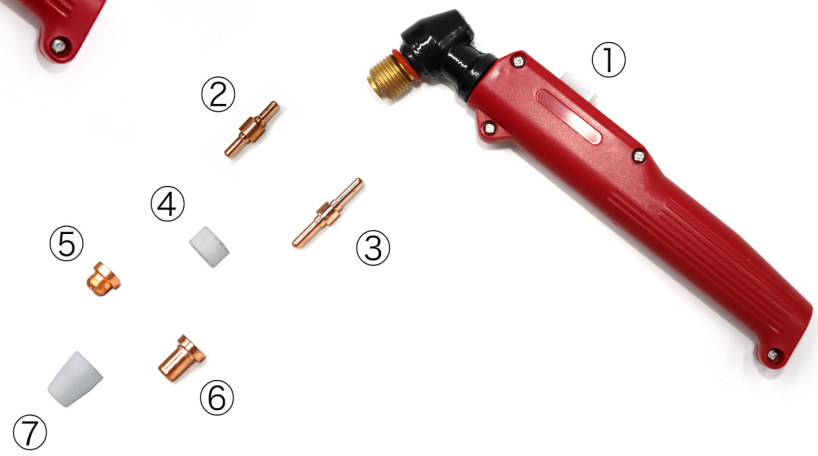

技术参数 Technical Data

标准长度 Standard length	5M
工作气压 Air pressure	4.5-5.5 bar
暂载率 60% Duty cycle 60%	30A

No.	Description
1	PT-31 枪头及手把 PT-31 Torch Head With Handle
2	电极 Electrode
3	长电极 Extended Electrode
4	涡流环 Swirl Ring
5	喷嘴 Nozzle
6	带台阶长喷嘴 Extended Nozzle
7	保护罩 Shield

等离子切割枪 SG51

PLASMA CUTTING TORCH SG51



技术参数 Technical Data

标准长度 Standard length	5M
工作气压 Air pressure	4.5-5.5 bar
暂载率 100% Duty cycle 100%	160A

No.	Description
1	SG51 枪头及手把 SG51 Torch Head Wit Handle
2	分流器 Diffuser
3	电极 Electrode
4	涡流环 Air diffuser
5	外喷嘴 Outside nozzle

等离子切割枪 YK100

PLASMA CUTTING TORCH YK100



切割能力 Cutting capacity	厚度切割 Cutting thickness	切割速度 Cutting speed
推荐值 Production	16mm	1100-1200mm/min
推荐值 Production	10mm	1600-1700mm/min
切断能力 Severance(Edge start)	40mm	130mm/min
穿孔能力 Pierce	20mm	

No.	Description
1	手柄 Handle
2	枪头 Torch head
3	气芯 Air core
4	电极 Electrode
5	喷嘴 Nozzle
6	大固定盖 Retaining cap
7	保护帽 Shielding cap
8	小固定盖 Small retaining cap

等离子切割枪 YK200

PLASMA CUTTING TORCH YK200



① ② ③ ④ ⑤ ⑥ ⑦ ⑧



切割能力 Cutting capacity	厚度切割 Cutting thickness	切割速度 Cutting speed
推荐值 Production	20mm	1000-1200mm/min
推荐值 Production	14mm	1600-1850mm/min
切断能力 Severance(Edge start)	50mm	230mm/min
穿孔能力 Pierce	30mm	

No.	Description
1	手柄 Handle
2	枪头 Torch head
3	水芯 Water core
4	电极 Electrode
5	喷嘴 Nozzle
6	大固定盖 Retaining cap
7	保护帽 Shielding cap
8	小固定盖 Small retaining cap



等离子切割枪 YK330

PLASMA CUTTING TORCH YK330


①


②


③


④


⑤


⑥


⑦


⑧


⑨


⑩

No.	Description
1	手柄 Handle
2	枪头 Torch head
3	气芯 Air core
4	电极 Electrode
5	
6	
7	喷嘴 Nozzle
8	大固定盖 Retaining cap
9	保护帽 Shielding cap
10	小固定盖 Small retaining cap

等离子切割枪配件

PLASMA CUTTING TORCH ACCESSORIES

CUT 70




No.	Description
1	Nozzle 0.9mm 30A
	Nozzle 1.1mm 30-60A
	Nozzle 1.2mm 50-70A
2	Long Nozzle 0.9mm 30A
	Long Nozzle 1.1mm 50A
3	Electrode
4	Long electrode
5	Insulato

CUT 200



No.	Description
1	Nozzle 1.2mm/40-70A
	Nozzle 1.4mm/70-90A
	Nozzle 1.6mm/90-120A
	Nozzle 1.8mm/120-160A
	Nozzle 2.0mm/160-200A
3	Electrode

CP 30



No.	Ref.	Description
1	C1304	Nozzle
2	C1370	Long nozzle 1.0mm
3	C1520	Electrode
4	C1519	Long electrode

CP 90/91



No.	Ref.	Description
1	C1847	Nozzle 1.0mm/30-40A
	C1848	Nozzle 1.3mm/50-60A
	C1849	Nozzle 1.5mm/70-80A
2	C1510	Swirl ring
3	C1368	Electrode

等离子切割枪配件
PLASMA CUTTING TORCH ACCESSORIES

PT 17



①　②

No.	Ref.	Description
1	19914	Nozzle 0.93mm
	19915	Nozzle 1.16mm
	19916	Nozzle 1.32mm
	19917	Nozzle 1.44mm
	20056	Nozzle 1.70mm
	20426	Nozzle/gouging/70A
2	19918	Electrode

PT 37



①　②　③

No.	Ref.	Description
1	558006601	Shield 100A
2	558005218	Nozzle 30A
	558004878	Nozzle 50A
	558005219	Nozzle 70A
	558004879	Nozzle 100A
3	558005220	Electrode

PT 23/27



①　②　③

No.	Ref.	Description
1	33368	Nozzle 0.93mm/ 30A
	33369	Nozzle 1.16mm/50A
2	33418	Nozzle 1.32mm/80A
3	33366	Electrode

SR 45



①　②

No.	Ref.	Description
1	770104	Nozzle
2	770015	Electrode

OTC 3500



①　②

No.	Ref.	Description
1	H705F04	Nozzle
2	H705F05	Electrode

等离子切割枪配件

PLASMA CUTTING TORCH ACCESSORIES

OTC 70


①


②

No.	Ref.	Description
1	H669G06	Nozzle 1.0mm/50A
	H669G05	Nozzle 1.2mm/70A
2	H669G11	Electrode

SG 53


①


②

No.	Ref.	Description
1		Nozzle
2		Electrode

SPC 50


①


②

No.	Ref.	Description
1		Nozzle
2		Electrode

OTC 1200


①


②

No.	Ref.	Description
1	H839K03	Nozzle 30A 0.8mm
	H839K02	Nozzle 50A 1.0mm
	H839K01	Nozzle 80A 1.2mm
	H839G03	Nozzle 120A 1.6mm
2	H839M00	Electrode

PCH 51


①


②


No.	Ref.	Description
1	9-5718	Nozzle 1.0mm/10-40A
	9-5631	Nozzle 1.1mm/40-60A
	8-3321	Nozzle 1.3mm/65A
	9-5724	Nozzle/gouge/0.78mm
2	9-5633	Electrode

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH




XL14AK GAS VALVE
Cooling Method: Air Cooled
Rating: 90AMixed Gases
Duty Cycle: 35%
Wire Size: 0.6-1.0mm




XL15AK
Cooling Method: Air Cooled
Rating: 180A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.0mm




XL25AK
Cooling Method: Air Cooled
Rating: 230A CO_2
200A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XL24KD
Cooling Method: Air Cooled
Rating: 250A CO_2
220A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XL26KD
Cooling Method: Air Cooled
Rating: 270A CO_2
240A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XL36KD
Cooling Method: Air Cooled
Rating: 320A CO_2
290A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XL40KD
Cooling Method: Air Cooled
Rating: 350A CO_2
320A Mixed Gases
Duty Cycle: 35%
Wire Size: 1.0-2.4mm



XL61GD
Cooling Method: Air Cooled
Rating: 500A CO_2
400A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.6-3.2mm




XL240D
Cooling Method: Water-Cooled
Rating: 300A CO_2
270A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm




XL401D
Cooling Method: Water-Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH




XL501D
Cooling Method: Water-Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm



XL501D AL/P
Cooling Method: Water-Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm



XLRB 610D
Cooling Method: Water-Cooled
Rating: 650A CO_2
500A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.6-3.2mm



MIG/MAG Machine Swan Necks
MIG/MAG Lengthen Swan Necks

XL14AK


技术参数 Technical Data

额定值 Rating	150A CO2/130A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.6-1.0mm

No.	Description
1	Swan Neck
2	Front Handle
3	Gas Valve
4	Electricity& Liner Connector
5	Cabile Assembly

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

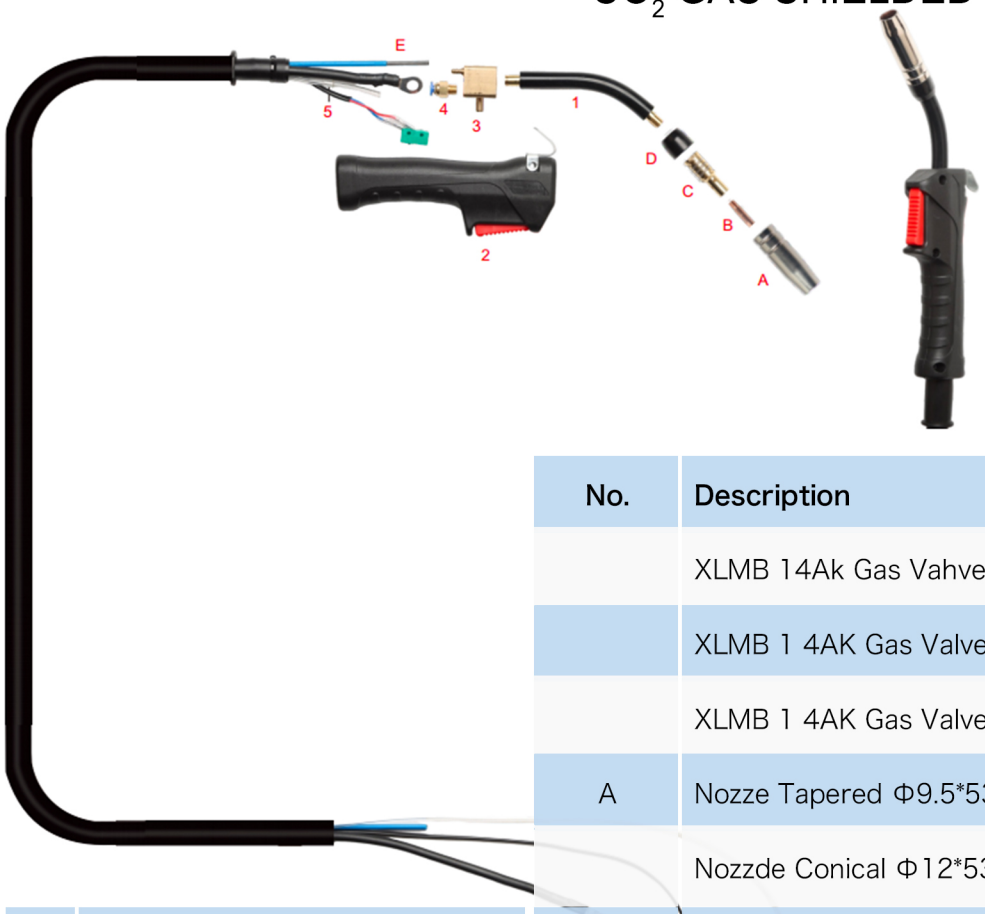

No.	Description
C	Tip Holder M6*34mm
D	Head insulator
E	Blue Steel Liner 0.6-0 8mm 2.0m
	Blue Steel Liner 0.6-0 8mm 2.5m
	Blue Steel Liner 0.6-0 8mm 3.0m

No.	Description
	XLMB 14Ak Gas Vahve MIG Welkding Torch 2.0m
	XLMB 1 4AK Gas Valve MIG welding Torch 2.5m
	XLMB 1 4AK Gas Valve .IG Welding Torch 3.0m
A	Nozze Tapered Φ9.5*53
	Nozzde Conical Φ12*53
	Nozzde Cylindrical Φ16*53
B	Contact Tip E-CU M6*25*0.6mm
	Contact Tip E-CU M6*25*0.8mm
	Contact Tip E-CU M6*25*0.9mm
	Contact Tip E-CU M6*25*1.0mm
	Contact Tip E-CU M6*25*1.2mm
	Contact Tip E-CU Aluminum M6*25*0.8mm
	Contact Tip E-CU Aluminum M6*25*1.0mm
	Contact Tip E-CU Aluminum M6*25*1.2mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XL15AK





技术参数 Technical Data

额定值 Rating	150A CO2/150A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.6-1.0mm


No.	Description	No.	Description
	XL15AK Welding Torch 3m	C	Tip Holder M6*42
	XL15Ak Welding Torch 4m	C1	Spring Support
	XL15Ak Welding Torch 5m	D	Blue Steel Liner 0.6-0.8mm 3mm
A	Nozzle Tapered Φ9.5*53		Blue Steel Liner 0.6-0.8mm 4mm
	Nozzle Conical Φ12*53		Blue Steel Liner 0.6-0.8mm 5mm
	Nozzle Cyindrical Φ16*53	1	Head Insulator
B	Contact Tip E-CU M6*25*0.6mm	2	Swan Neck
	Contact Tip E-CU M6*25*0.8mm	2-1	Swan neck Flexible
	Contact Tip E-CU M6*25*0.9mm	3	Front Handle
	Contact Tip E-CU M6*25*1.0mm	4	Switch
	Contact Tip E-CU M6*25*1.2mm	5	Cable Ball Joint & Support Spring Middle
	Contact Tip CuCrZr M6*25*0.6mm	6	XL15AK Power Cable 3m 16mm²
	Contact Tip CuCrZr M6*25*0.8mm		XL15AK Power Cable 4m 16mm²
	Contact Tip CuCrZr M6*25*1.0mm		XL15AK Power Cable 5m 16mm²
	Contact Tip CuCrZr M6*25*1.2mm	7	Rear Handle & Support Spring
	Contact Tip E-CU Aluminum M6*25*0.8mm	8	Rear Connector Nut
	Contact Tip E-CU Aluminum M6*25*1.0mm	9	Euro Central Connector KZ-2
	Contact Tip E-CU Aluminum M6*25*1.2mm	10	Liner Positioner Nut M10x1



二氧化碳气保焊焊枪

XL24KD

CO_2 GAS SHIELDED WELDING TORCH

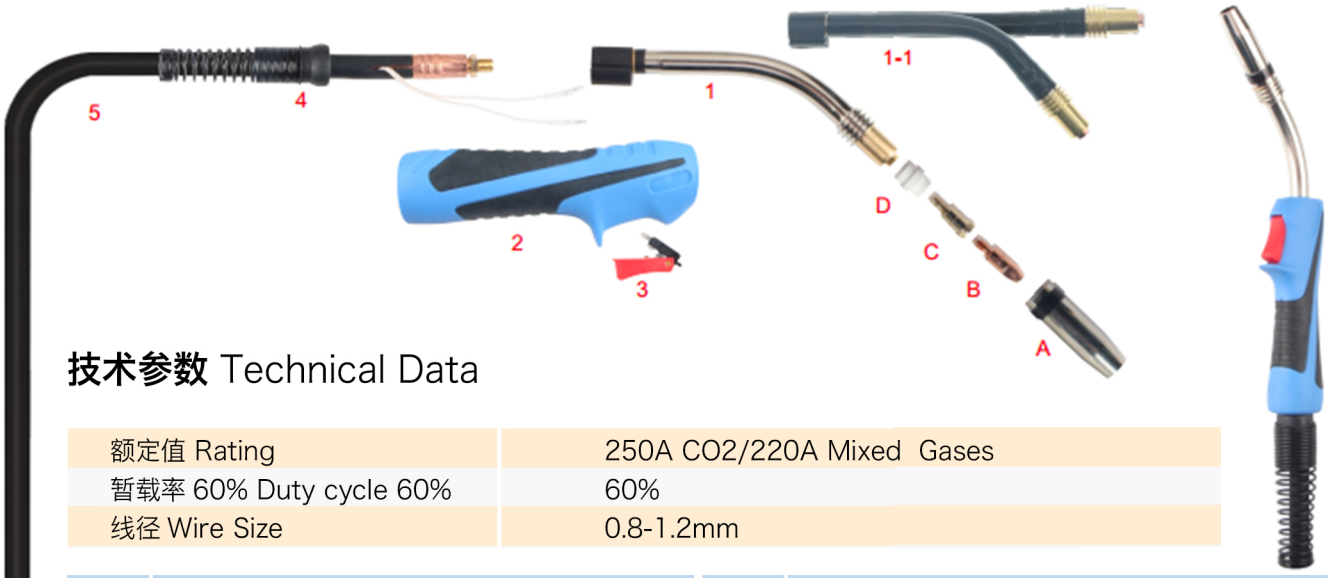

技术参数 Technical Data

额定值 Rating	250A CO2/220A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm

No.	Description
	XL24KD Welding Torch 3m
	XL24KD Welding Torch 4m
	XL24KD Welding Torch 5m
A	Nozzle Conical Φ10*63.5
	Nozzle Conical Φ12.5*63.5
	Nozzle Cylindrical Φ17*63.5
B	Contact Tip E-CU M6*28*0.8mm
	Contact Tip E-CU M6*28*0.9mm
	Contact Tip E-CU M6*28*1.0mm
	Contact Tip E-CU M6*28*1.2mm
	Contact Tip E-CU M6*28*1.4mm
	Contact Tip E-CU M6*28*1.6mm
	Contact Tip CuCrZr M6*28*0.8mm
	Contact Tip CuCrZr M6*28*1.0mm
	Contact Tip CuCrZr M6*28*1.2mm
	Contact Tip CuCrZr M6*28*1.4mm
	Contact Tip CuCrZr M6*28*1.6mm
	Contact Tip E-CU Aluminum M6*28*0.8mm
	Contact Tip E-CU Aluminum M6*28*1.0mm
	Contact Tip E-CU Aluminum M6*28*1.2mm
	Contact Tip E-CU Aluminum M6*28*1.4mm


No.	Description
	Contact Tip E-CU Aluminum M6*28*1.6mm
C	Tip Holder M6*26
D	Gas Diffuser DMC
	Gas Diffuser Ceramic
E	Red Steel Liner 1.0-1.2mm 3m
	Red Steel Liner 1.0-1.2mm 4m
	Red Steel Liner 1.0-1.2mm 5m
1	Swan Neck
1-1	Swan Neck Flexible
2	Front Handle
3	Switch
4	Cable Ball Joint & Support Spring Middle
5	XL24KD Power Cable 3m 25mm²
	XL24KD Power Cable 4m 25mm²
	XL24KD Power Cable 5m 25mm²
6	Rear Handle & Support Spring
7	Rear Connector Nut
8	Euro Central Connector KZ-2
9	Liner Positioner Nut M10x1



二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XL25AK

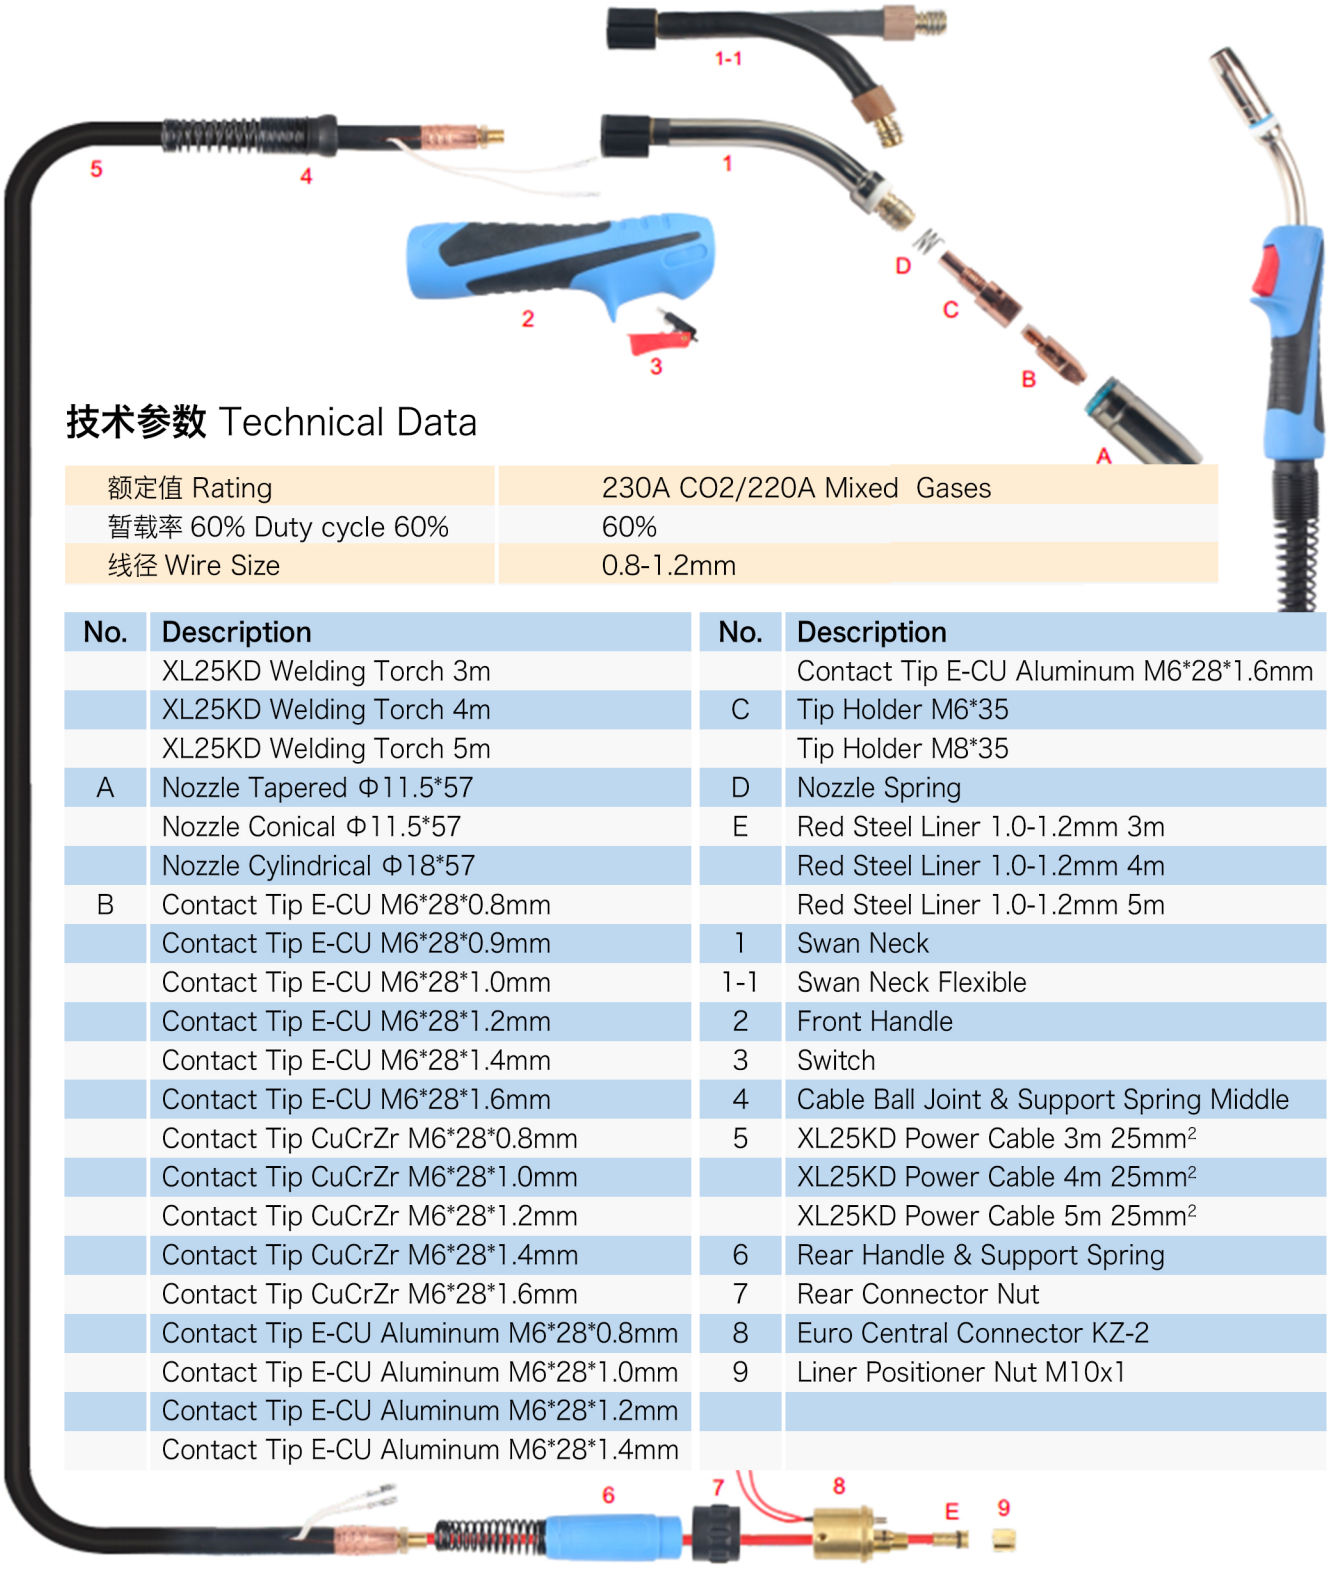

技术参数 Technical Data


额定值 Rating	230A CO2/220A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm

No.	Description	No.	Description
	XL25KD Welding Torch 3m		Contact Tip E-CU Aluminum M6*28*1.6mm
	XL25KD Welding Torch 4m	C	Tip Holder M6*35
	XL25KD Welding Torch 5m		Tip Holder M8*35
A	Nozzle Tapered Φ11.5*57	D	Nozzle Spring
	Nozzle Conical Φ11.5*57	E	Red Steel Liner 1.0-1.2mm 3m
	Nozzle Cylindrical Φ18*57		Red Steel Liner 1.0-1.2mm 4m
B	Contact Tip E-CU M6*28*0.8mm		Red Steel Liner 1.0-1.2mm 5m
	Contact Tip E-CU M6*28*0.9mm	1	Swan Neck
	Contact Tip E-CU M6*28*1.0mm	1-1	Swan Neck Flexible
	Contact Tip E-CU M6*28*1.2mm	2	Front Handle
	Contact Tip E-CU M6*28*1.4mm	3	Switch
	Contact Tip E-CU M6*28*1.6mm	4	Cable Ball Joint & Support Spring Middle
	Contact Tip CuCrZr M6*28*0.8mm	5	XL25KD Power Cable 3m 25mm²
	Contact Tip CuCrZr M6*28*1.0mm		XL25KD Power Cable 4m 25mm²
	Contact Tip CuCrZr M6*28*1.2mm		XL25KD Power Cable 5m 25mm²
	Contact Tip CuCrZr M6*28*1.4mm	6	Rear Handle & Support Spring
	Contact Tip CuCrZr M6*28*1.6mm	7	Rear Connector Nut
	Contact Tip E-CU Aluminum M6*28*0.8mm	8	Euro Central Connector KZ-2
	Contact Tip E-CU Aluminum M6*28*1.0mm	9	Liner Positioner Nut M10x1
	Contact Tip E-CU Aluminum M6*28*1.2mm		
	Contact Tip E-CU Aluminum M6*28*1.4mm		

二氧化碳气保焊焊枪

XL26KD

CO_2 GAS SHIELDED WELDING TORCH

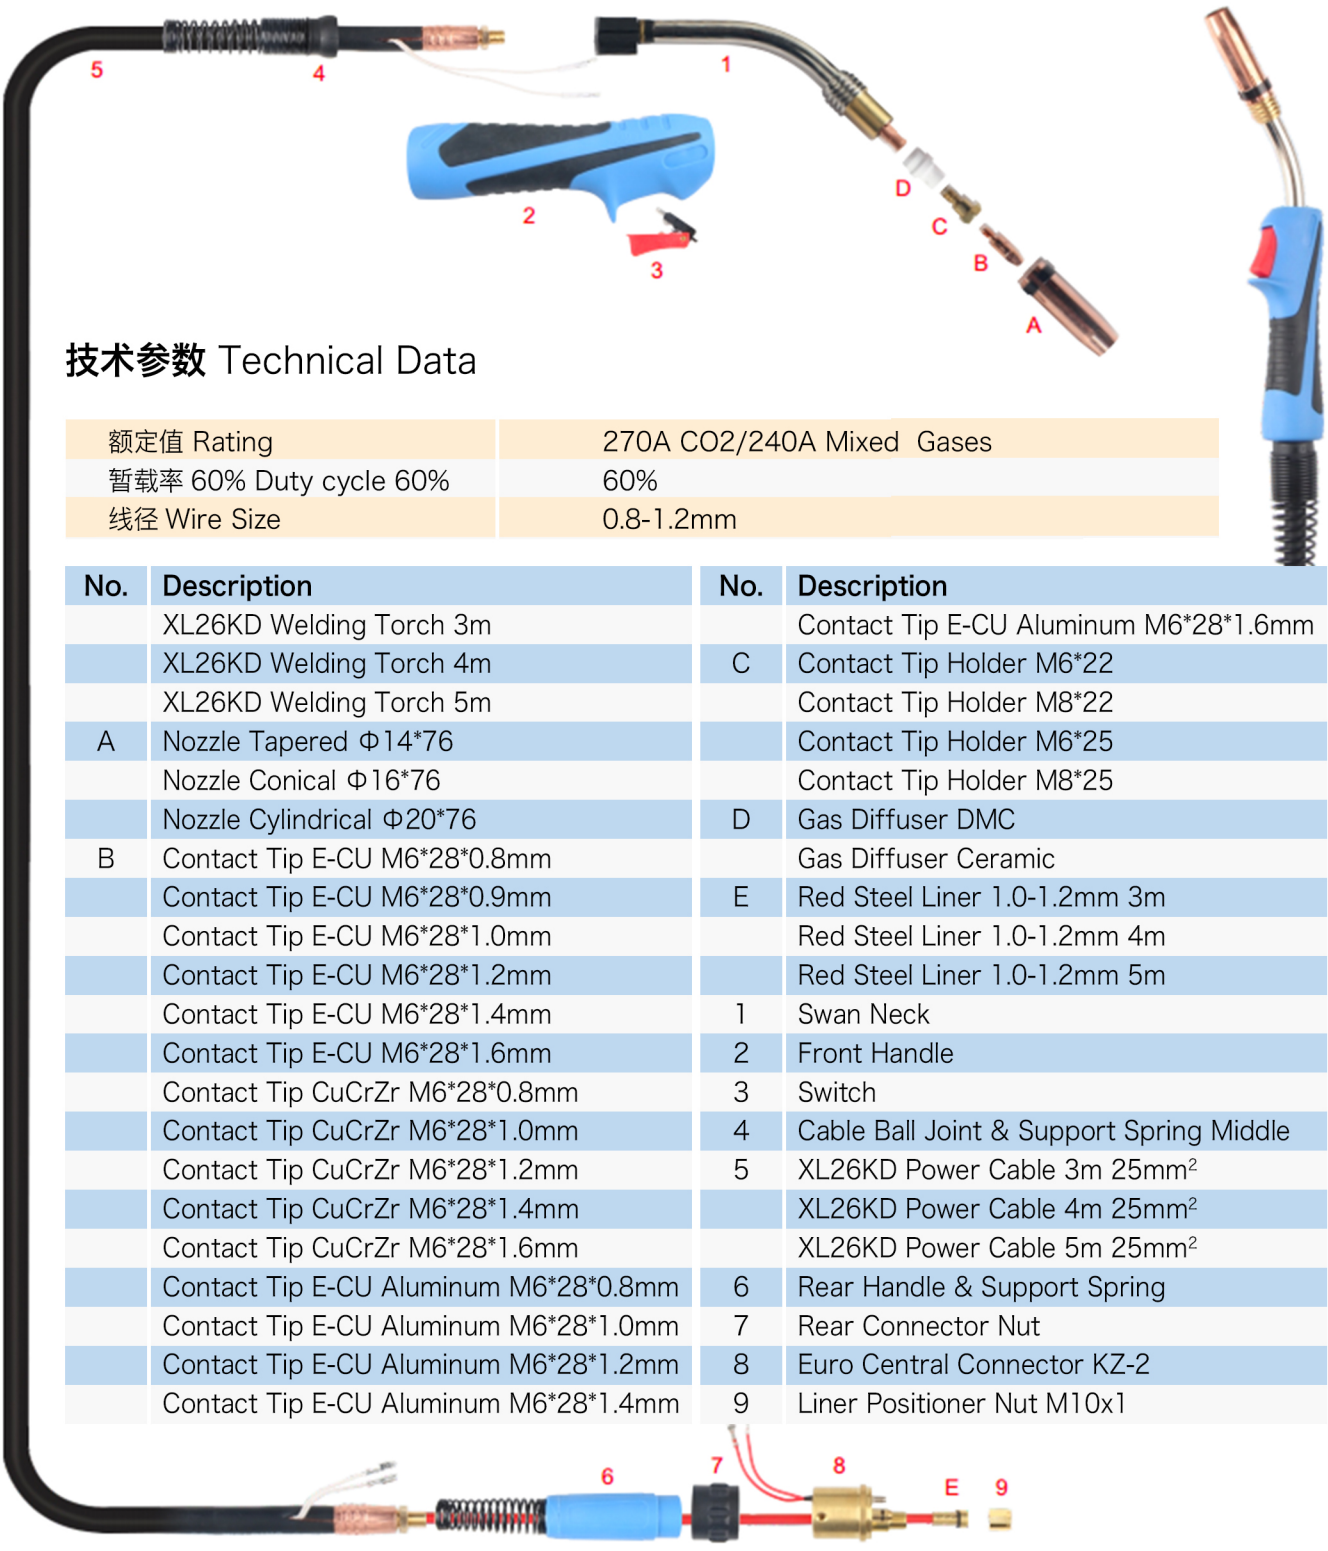

技术参数 Technical Data


额定值 Rating	270A CO2/240A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm

No.	Description	No.	Description
	XL26KD Welding Torch 3m		Contact Tip E-CU Aluminum M6*28*1.6mm
	XL26KD Welding Torch 4m	C	Contact Tip Holder M6*22
	XL26KD Welding Torch 5m		Contact Tip Holder M8*22
A	Nozzle Tapered Φ14*76		Contact Tip Holder M6*25
	Nozzle Conical Φ16*76		Contact Tip Holder M8*25
	Nozzle Cylindrical Φ20*76	D	Gas Diffuser DMC
B	Contact Tip E-CU M6*28*0.8mm		Gas Diffuser Ceramic
	Contact Tip E-CU M6*28*0.9mm	E	Red Steel Liner 1.0-1.2mm 3m
	Contact Tip E-CU M6*28*1.0mm		Red Steel Liner 1.0-1.2mm 4m
	Contact Tip E-CU M6*28*1.2mm		Red Steel Liner 1.0-1.2mm 5m
	Contact Tip E-CU M6*28*1.4mm	1	Swan Neck
	Contact Tip E-CU M6*28*1.6mm	2	Front Handle
	Contact Tip CuCrZr M6*28*0.8mm	3	Switch
	Contact Tip CuCrZr M6*28*1.0mm	4	Cable Ball Joint & Support Spring Middle
	Contact Tip CuCrZr M6*28*1.2mm	5	XL26KD Power Cable 3m 25mm^2
	Contact Tip CuCrZr M6*28*1.4mm		XL26KD Power Cable 4m 25mm^2
	Contact Tip CuCrZr M6*28*1.6mm		XL26KD Power Cable 5m 25mm^2
	Contact Tip E-CU Aluminum M6*28*0.8mm	6	Rear Handle & Support Spring
	Contact Tip E-CU Aluminum M6*28*1.0mm	7	Rear Connector Nut
	Contact Tip E-CU Aluminum M6*28*1.2mm	8	Euro Central Connector KZ-2
	Contact Tip E-CU Aluminum M6*28*1.4mm	9	Liner Positioner Nut M10x1

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XL36KD

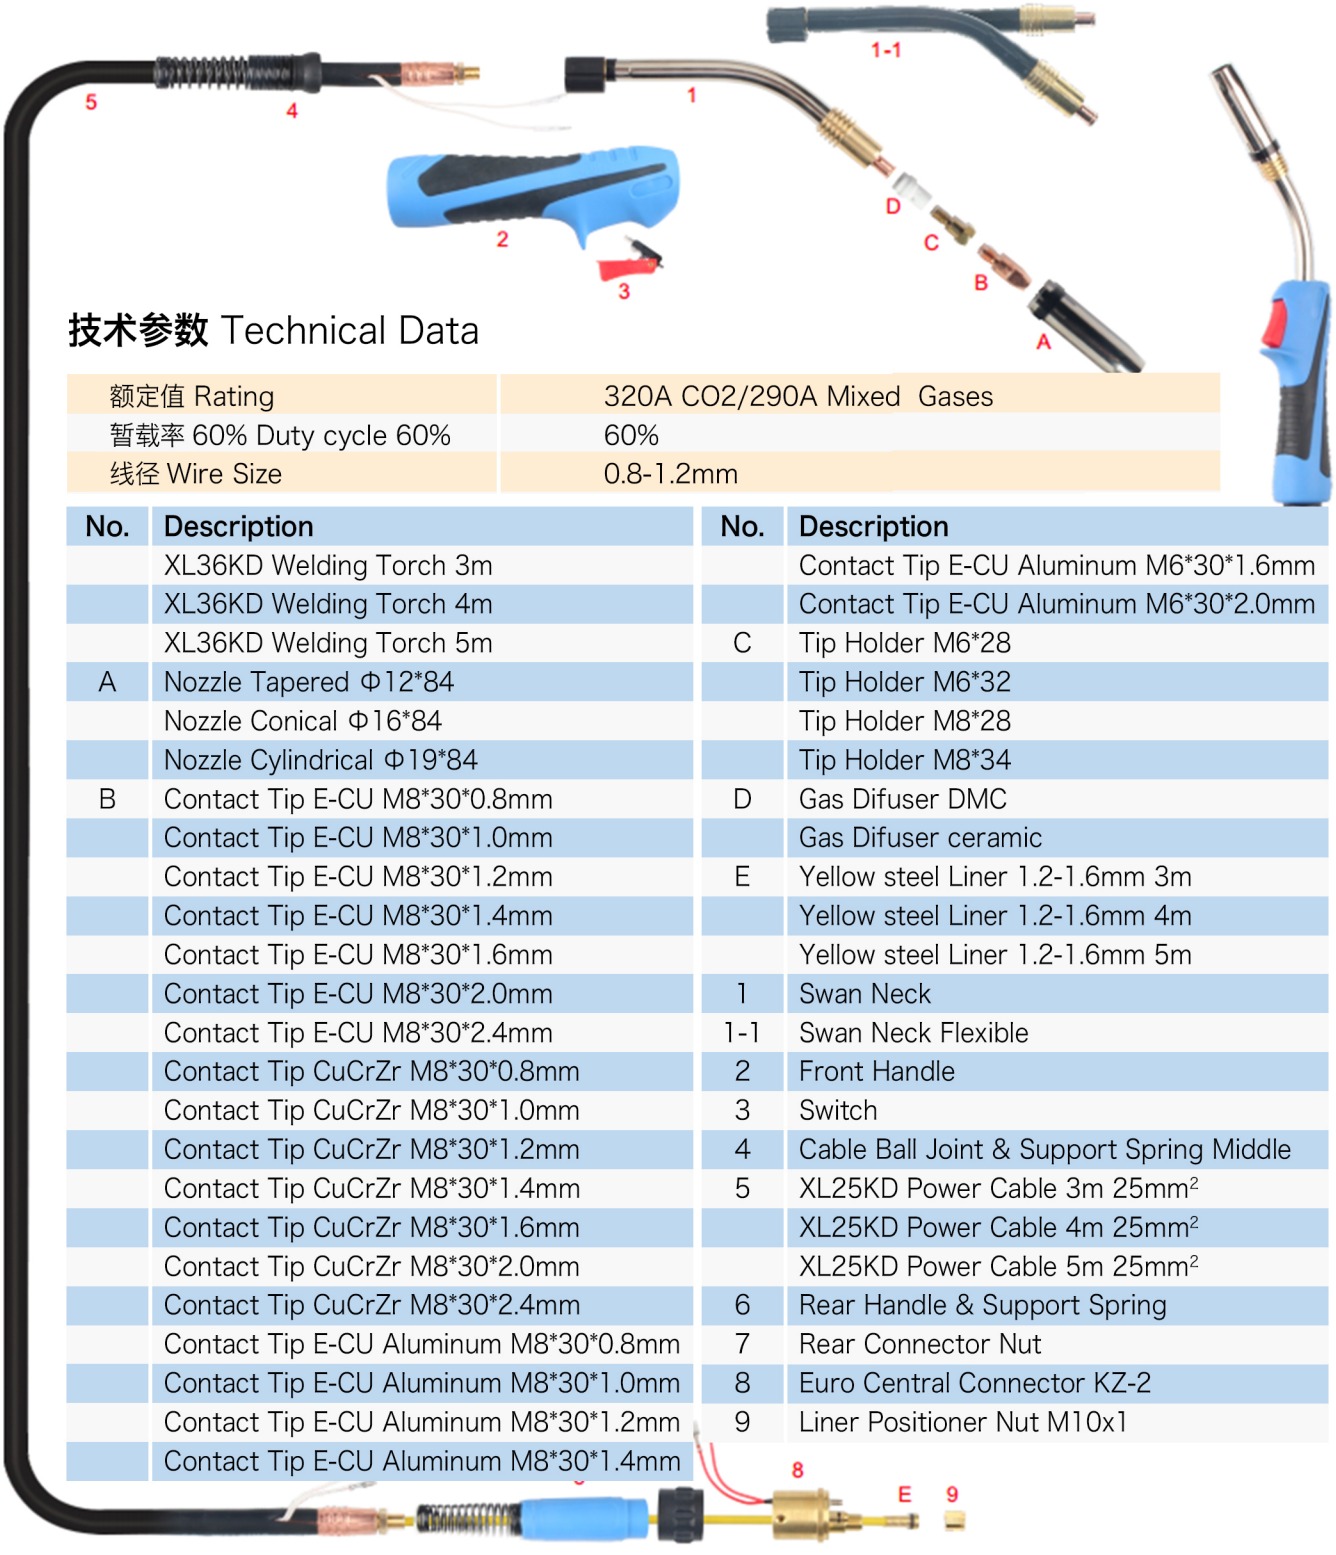

技术参数 Technical Data

额定值 Rating	320A CO2/290A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm


No.	Description	No.	Description
	XL36KD Welding Torch 3m		Contact Tip E-CU Aluminum M6*30*1.6mm
	XL36KD Welding Torch 4m		Contact Tip E-CU Aluminum M6*30*2.0mm
	XL36KD Welding Torch 5m	C	Tip Holder M6*28
A	Nozzle Tapered Φ12*84		Tip Holder M6*32
	Nozzle Conical Φ16*84		Tip Holder M8*28
	Nozzle Cylindrical Φ19*84		Tip Holder M8*34
B	Contact Tip E-CU M8*30*0.8mm	D	Gas Difuser DMC
	Contact Tip E-CU M8*30*1.0mm		Gas Difuser ceramic
	Contact Tip E-CU M8*30*1.2mm	E	Yellow steel Liner 1.2-1.6mm 3m
	Contact Tip E-CU M8*30*1.4mm		Yellow steel Liner 1.2-1.6mm 4m
	Contact Tip E-CU M8*30*1.6mm		Yellow steel Liner 1.2-1.6mm 5m
	Contact Tip E-CU M8*30*2.0mm	1	Swan Neck
	Contact Tip E-CU M8*30*2.4mm	1-1	Swan Neck Flexible
	Contact Tip CuCrZr M8*30*0.8mm	2	Front Handle
	Contact Tip CuCrZr M8*30*1.0mm	3	Switch
	Contact Tip CuCrZr M8*30*1.2mm	4	Cable Ball Joint & Support Spring Middle
	Contact Tip CuCrZr M8*30*1.4mm	5	XL25KD Power Cable 3m 25mm^2
	Contact Tip CuCrZr M8*30*1.6mm		XL25KD Power Cable 4m 25mm^2
	Contact Tip CuCrZr M8*30*2.0mm		XL25KD Power Cable 5m 25mm^2
	Contact Tip CuCrZr M8*30*2.4mm	6	Rear Handle & Support Spring
	Contact Tip E-CU Aluminum M8*30*0.8mm	7	Rear Connector Nut
	Contact Tip E-CU Aluminum M8*30*1.0mm	8	Euro Central Connector KZ-2
	Contact Tip E-CU Aluminum M8*30*1.2mm	9	Liner Positioner Nut M10x1
	Contact Tip E-CU Aluminum M8*30*1.4mm		

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH




XLMB EVO 15
Cooling Method: Air Cooled
Rating: 180A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.0mm




XLMB EVO 24
Cooling Method: Air Cooled
Rating: 250A CO_2
220A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLMB EVO 25
Cooling Method: Air Cooled
Rating: 230A CO_2
200A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLMB EVO 26
Cooling Method: Air Cooled
Rating: 270A CO_2
240A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLMB EVO 36
Cooling Method: Air Cooled
Rating: 320A CO_2
290A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm



XLMB EVO 240D
Cooling Method: Water-Cooled
Rating: 300A CO_2
270A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm



XLMB EVO 401D
Cooling Method: Water-Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm



XLMB EVO 501D
Cooling Method: Water-Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH




XLMB EVO PRO 15
Cooling Method: Air Cooled
Rating: 180A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.0mm




XLMB EVO PRO 24
Cooling Method: Air Cooled
Rating: 250A CO_2
220A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLMB EVO PRO 25
Cooling Method: Air Cooled
Rating: 230A CO_2
200A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLMB EVO PRO 26
Cooling Method: Air Cooled
Rating: 270A CO_2
240A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLMB EVO PRO 36
Cooling Method: Air Cooled
Rating: 320A CO_2
290A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm



XLMB EVO PRO 240D
Cooling Method: Water-Cooled
Rating: 300A CO_2
270A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm



XLMB EVO PRO 401D
Cooling Method: Water-Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm




XLMB EVO PRO 501D
Cooling Method: Water-Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm

二氧化碳气保焊焊枪

XLMB EVO 15

CO_2 GAS SHIELDED WELDING TORCH

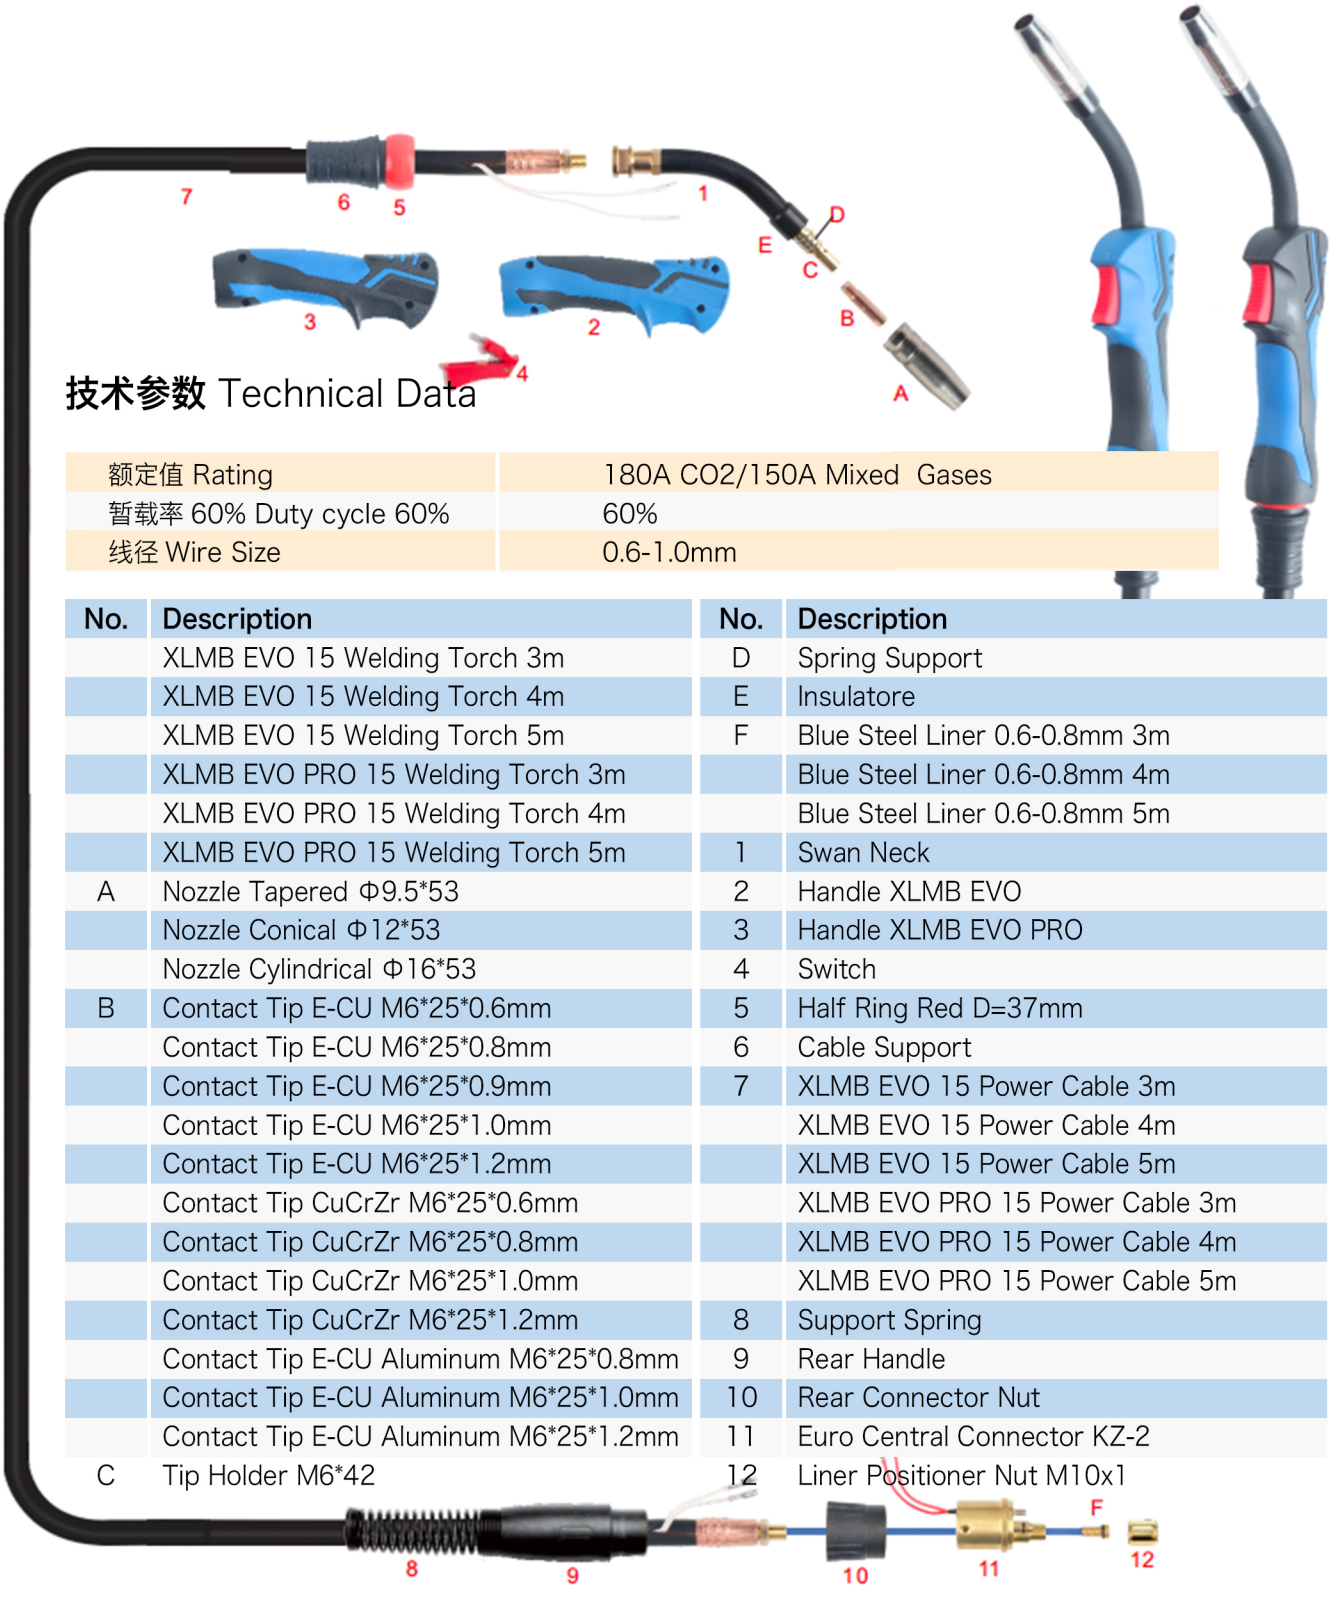

技术参数 Technical Data


额定值 Rating	180A CO2/150A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.6-1.0mm

No.	Description	No.	Description
	XLMB EVO 15 Welding Torch 3m	D	Spring Support
	XLMB EVO 15 Welding Torch 4m	E	Insulatore
	XLMB EVO 15 Welding Torch 5m	F	Blue Steel Liner 0.6-0.8mm 3m
	XLMB EVO PRO 15 Welding Torch 3m		Blue Steel Liner 0.6-0.8mm 4m
	XLMB EVO PRO 15 Welding Torch 4m		Blue Steel Liner 0.6-0.8mm 5m
	XLMB EVO PRO 15 Welding Torch 5m	1	Swan Neck
A	Nozzle Tapered Φ9.5*53	2	Handle XLMB EVO
	Nozzle Conical Φ12*53	3	Handle XLMB EVO PRO
	Nozzle Cylindrical Φ16*53	4	Switch
B	Contact Tip E-CU M6*25*0.6mm	5	Half Ring Red D=37mm
	Contact Tip E-CU M6*25*0.8mm	6	Cable Support
	Contact Tip E-CU M6*25*0.9mm	7	XLMB EVO 15 Power Cable 3m
	Contact Tip E-CU M6*25*1.0mm		XLMB EVO 15 Power Cable 4m
	Contact Tip E-CU M6*25*1.2mm		XLMB EVO 15 Power Cable 5m
	Contact Tip CuCrZr M6*25*0.6mm		XLMB EVO PRO 15 Power Cable 3m
	Contact Tip CuCrZr M6*25*0.8mm		XLMB EVO PRO 15 Power Cable 4m
	Contact Tip CuCrZr M6*25*1.0mm		XLMB EVO PRO 15 Power Cable 5m
	Contact Tip CuCrZr M6*25*1.2mm	8	Support Spring
	Contact Tip E-CU Aluminum M6*25*0.8mm	9	Rear Handle
	Contact Tip E-CU Aluminum M6*25*1.0mm	10	Rear Connector Nut
	Contact Tip E-CU Aluminum M6*25*1.2mm	11	Euro Central Connector KZ-2
C	Tip Holder M6*42	12	Liner Positioner Nut M10x1

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLMB EVO 24

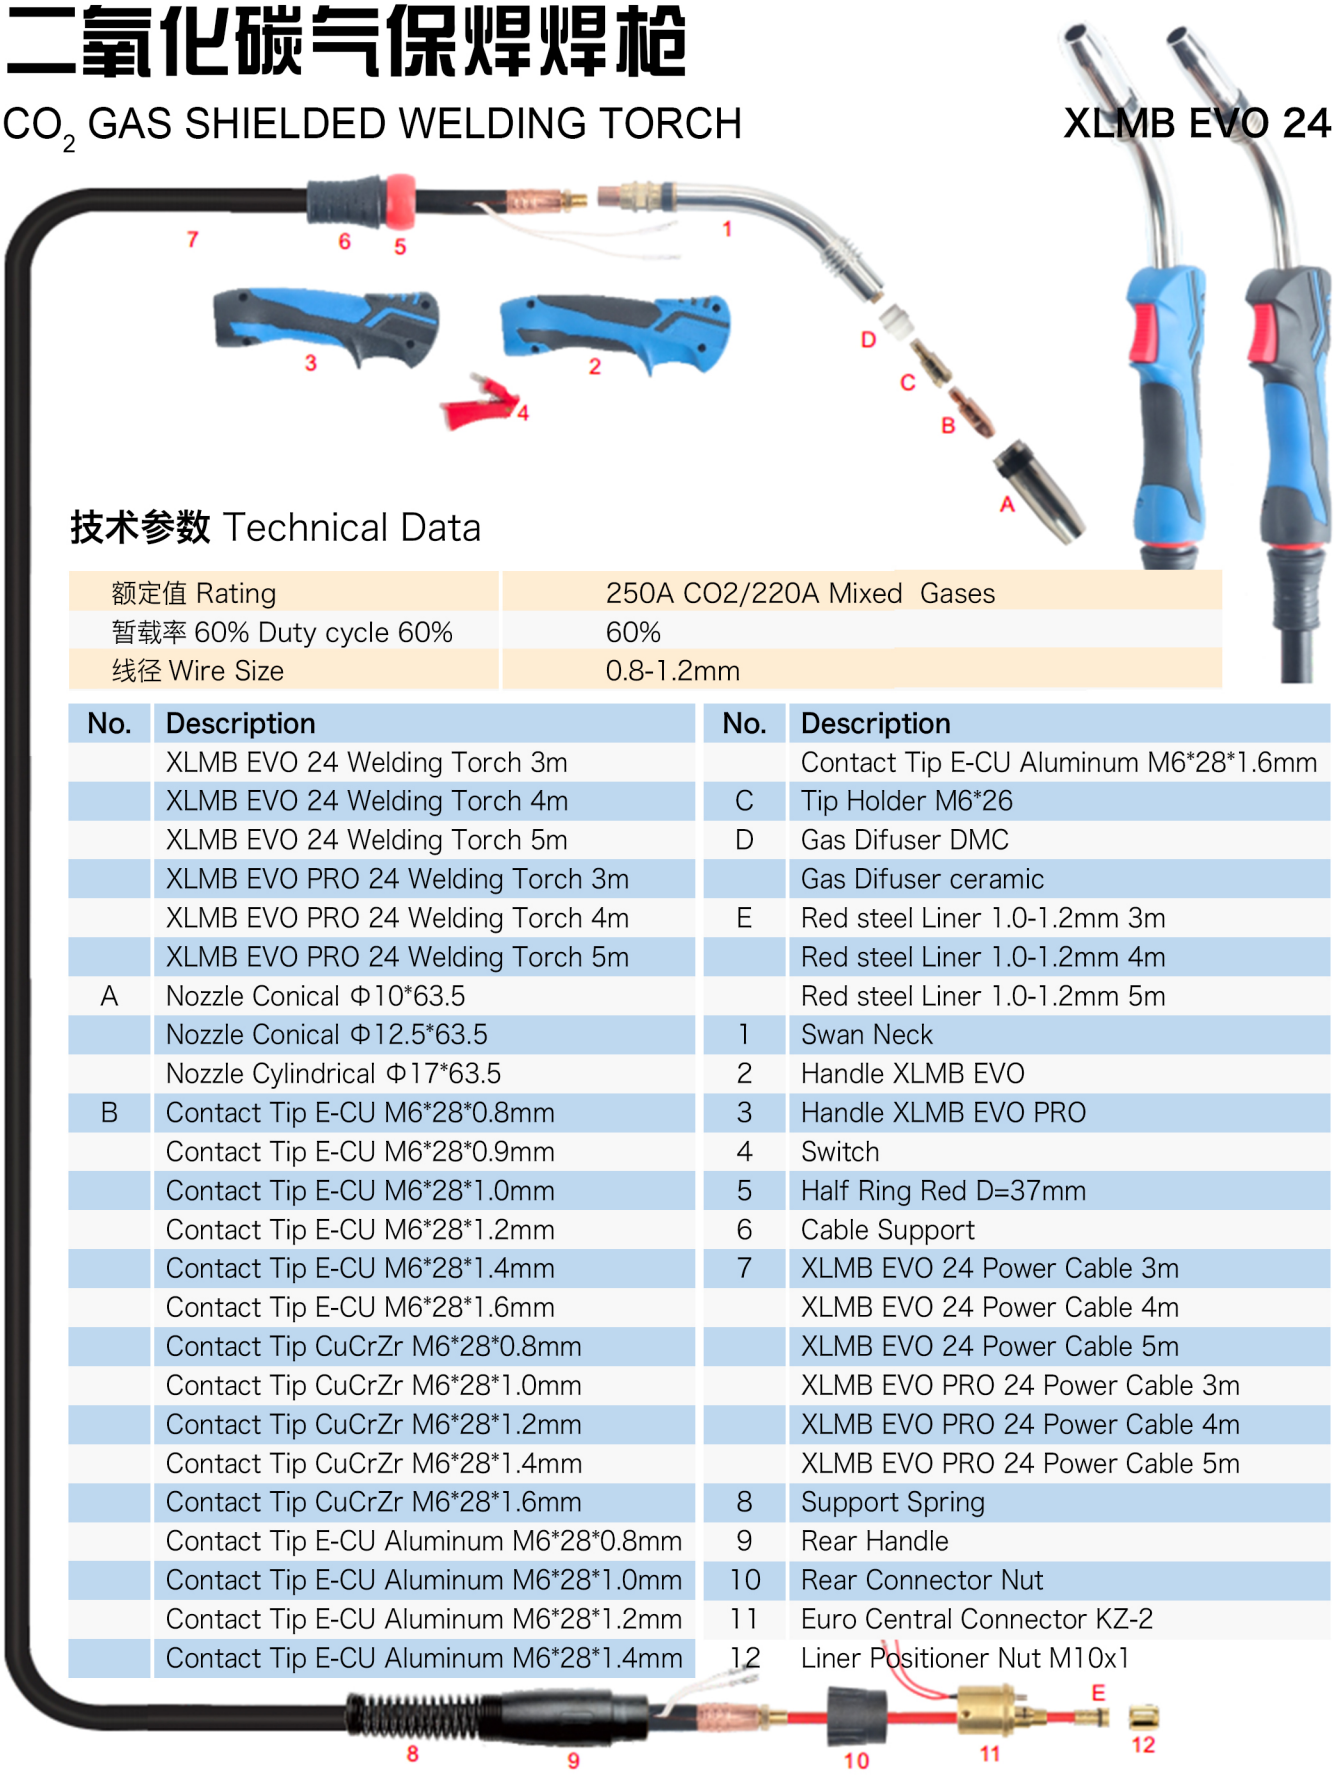

技术参数 Technical Data


额定值 Rating	250A CO2/220A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm

No.	Description	No.	Description
	XLMB EVO 24 Welding Torch 3m		Contact Tip E-CU Aluminum M6*28*1.6mm
	XLMB EVO 24 Welding Torch 4m	C	Tip Holder M6*26
	XLMB EVO 24 Welding Torch 5m	D	Gas Difuser DMC
	XLMB EVO PRO 24 Welding Torch 3m		Gas Difuser ceramic
	XLMB EVO PRO 24 Welding Torch 4m	E	Red steel Liner 1.0-1.2mm 3m
	XLMB EVO PRO 24 Welding Torch 5m		Red steel Liner 1.0-1.2mm 4m
A	Nozzle Conical Φ10*63.5		Red steel Liner 1.0-1.2mm 5m
	Nozzle Conical Φ12.5*63.5	1	Swan Neck
	Nozzle Cylindrical Φ17*63.5	2	Handle XLMB EVO
B	Contact Tip E-CU M6*28*0.8mm	3	Handle XLMB EVO PRO
	Contact Tip E-CU M6*28*0.9mm	4	Switch
	Contact Tip E-CU M6*28*1.0mm	5	Half Ring Red D=37mm
	Contact Tip E-CU M6*28*1.2mm	6	Cable Support
	Contact Tip E-CU M6*28*1.4mm	7	XLMB EVO 24 Power Cable 3m
	Contact Tip E-CU M6*28*1.6mm		XLMB EVO 24 Power Cable 4m
	Contact Tip CuCrZr M6*28*0.8mm		XLMB EVO 24 Power Cable 5m
	Contact Tip CuCrZr M6*28*1.0mm		XLMB EVO PRO 24 Power Cable 3m
	Contact Tip CuCrZr M6*28*1.2mm		XLMB EVO PRO 24 Power Cable 4m
	Contact Tip CuCrZr M6*28*1.4mm		XLMB EVO PRO 24 Power Cable 5m
	Contact Tip CuCrZr M6*28*1.6mm	8	Support Spring
	Contact Tip E-CU Aluminum M6*28*0.8mm	9	Rear Handle
	Contact Tip E-CU Aluminum M6*28*1.0mm	10	Rear Connector Nut
	Contact Tip E-CU Aluminum M6*28*1.2mm	11	Euro Central Connector KZ-2
	Contact Tip E-CU Aluminum M6*28*1.4mm	12	Liner Positioner Nut M10x1

XLMB EVO 25

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

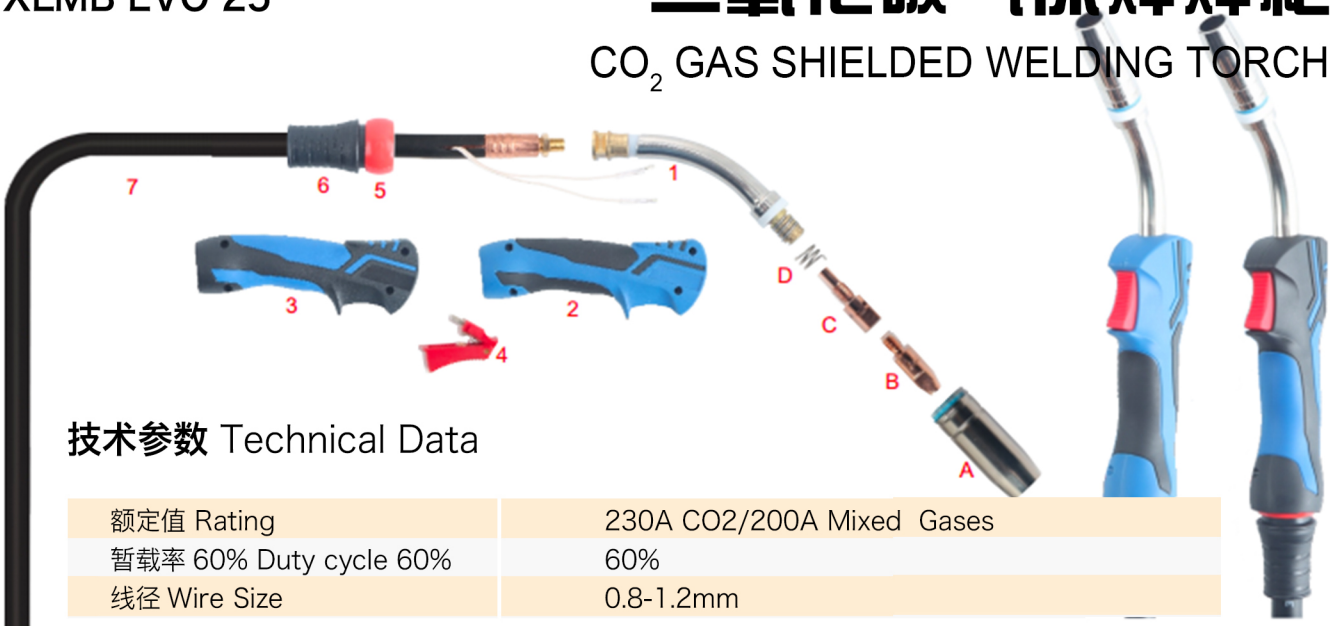

技术参数 Technical Data

额定值 Rating	230A CO2/200A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm

No.	Description
	XLMB EVO 25 Welding Torch 3m
	XLMB EVO 25 Welding Torch 4m
	XLMB EVO 25 Welding Torch 5m
	XLMB EVO PRO 25 Welding Torch 3m
	XLMB EVO PRO 25 Welding Torch 4m
	XLMB EVO PRO 25 Welding Torch 5m
A	Nozzle Tapered Φ11.5*57
	Nozzle Conical Φ15*57
	Nozzle Cylindrical Φ18*57
B	Contact Tip E-CU M6*28*0.8mm
	Contact Tip E-CU M6*28*0.9mm
	Contact Tip E-CU M6*28*1.0mm
	Contact Tip E-CU M6*28*1.2mm
	Contact Tip E-CU M6*28*1.4mm
	Contact Tip E-CU M6*28*1.6mm
	Contact Tip CuCrZr M6*28*0.8mm
	Contact Tip CuCrZr M6*28*1.0mm
	Contact Tip CuCrZr M6*28*1.2mm
	Contact Tip CuCrZr M6*28*1.4mm
	Contact Tip CuCrZr M6*28*1.6mm
	Contact Tip E-CU Aluminum M6*28*0.8mm
	Contact Tip E-CU Aluminum M6*28*1.0mm
	Contact Tip E-CU Aluminum M6*28*1.2mm
	Contact Tip E-CU Aluminum M6*28*1.4mm


No.	Description
	Contact Tip E-CU Aluminum M6*28*1.6mm
C	Tip Holder M6*35
D	Nozzle Spring
E	Red Steel Liner 1.0-1.2mm 3m
	Red Steel Liner 1.0-1.2mm 4m
	Red Steel Liner 1.0-1.2mm 5m
1	Swan Neck
2	Handle XLMB EVO
3	Handle XLMB EVO PRO
4	Switch
5	Half Ring Red D=37mm
6	Cable Support
7	XLMB EVO 25 Power Cable 3m
	XLMB EVO 25 Power Cable 4m
	XLMB EVO 25 Power Cable 5m
	XLMB EVO PRO 25 Power Cable 3m
	XLMB EVO PRO 25 Power Cable 4m
	XLMB EVO PRO 25 Power Cable 5m
8	Support Spring
9	Rear Handle
10	Rear Connector Nut
11	Euro Central Connector KZ-2
12	Liner Positioner Nut M10x1



二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLMB EVO 26

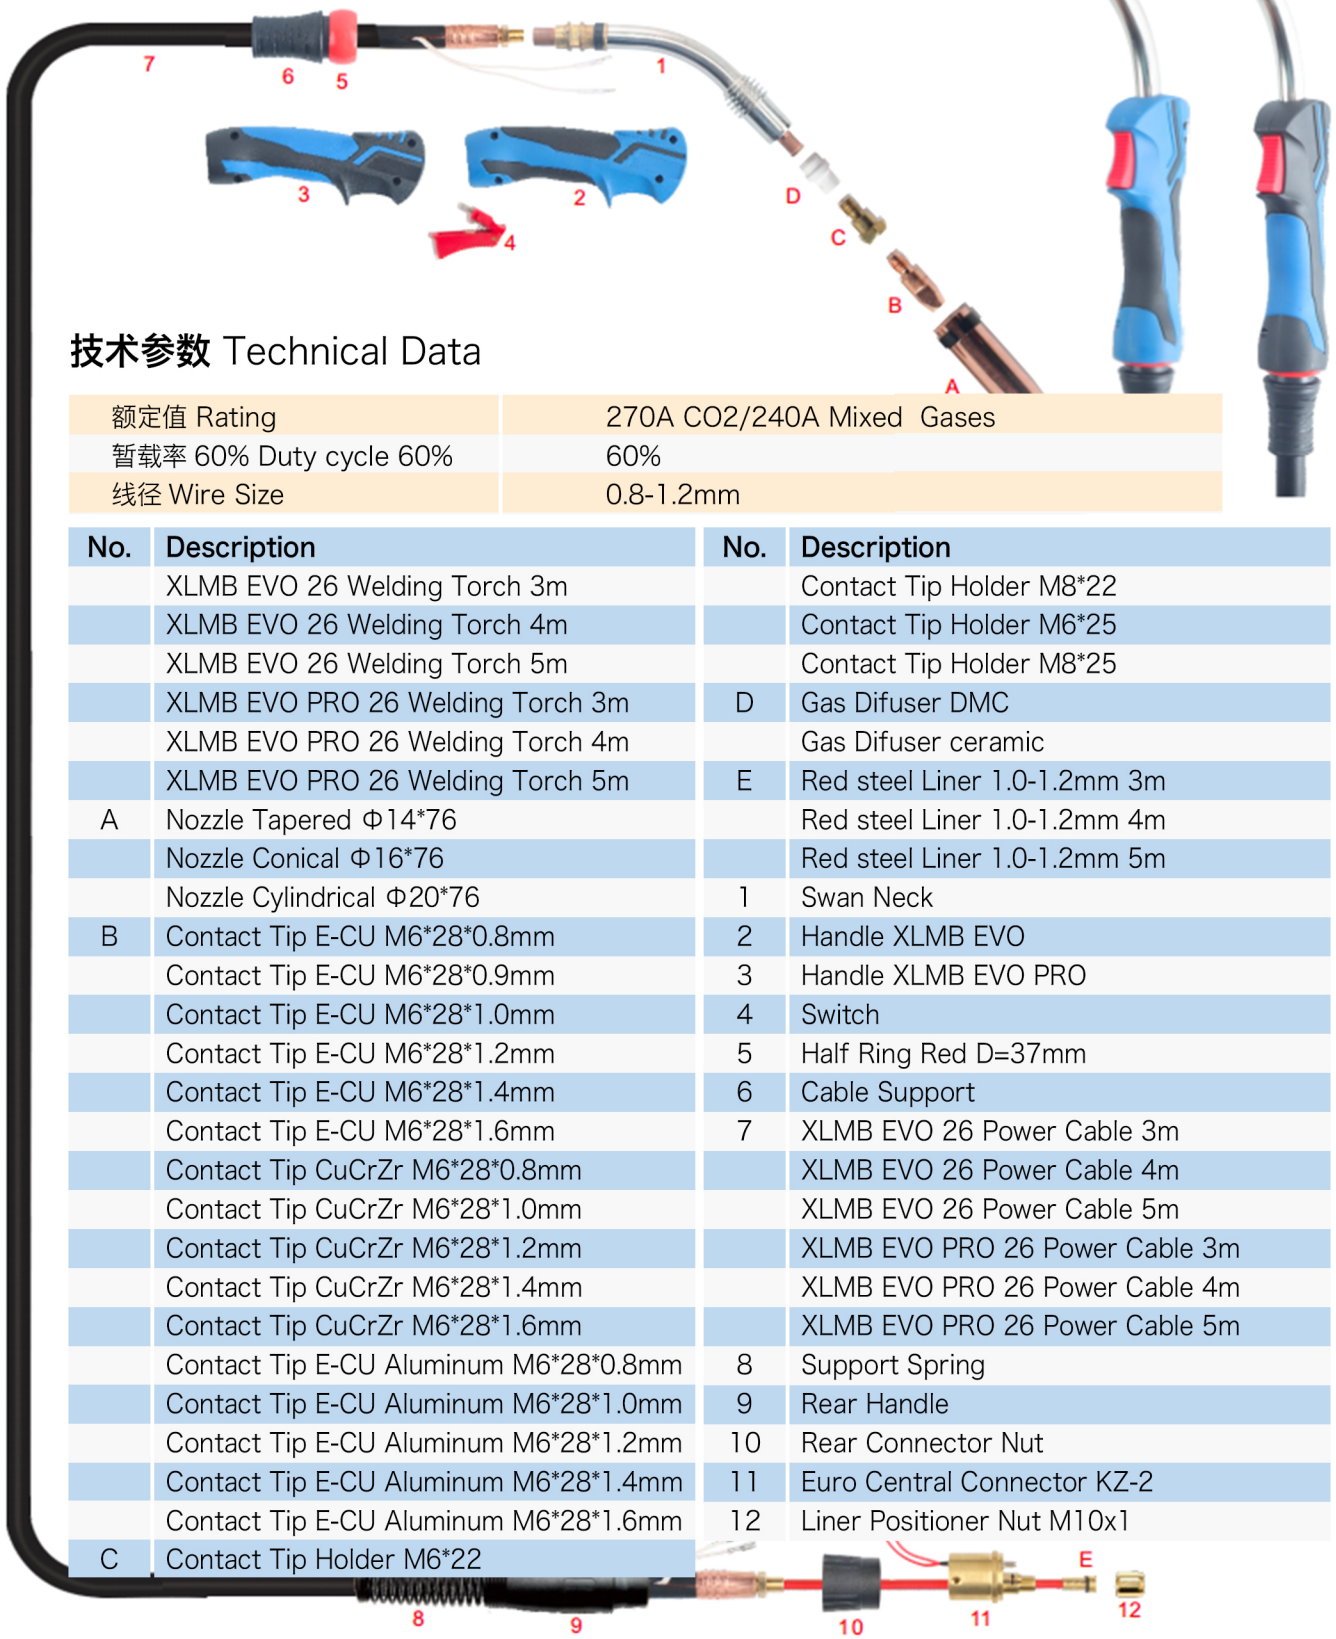

技术参数 Technical Data

额定值 Rating	270A CO2/240A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm


No.	Description
	XLMB EVO 26 Welding Torch 3m
	XLMB EVO 26 Welding Torch 4m
	XLMB EVO 26 Welding Torch 5m
	XLMB EVO PRO 26 Welding Torch 3m
	XLMB EVO PRO 26 Welding Torch 4m
	XLMB EVO PRO 26 Welding Torch 5m
A	Nozzle Tapered Φ14*76
	Nozzle Conical Φ16*76
	Nozzle Cylindrical Φ20*76
B	Contact Tip E-CU M6*28*0.8mm
	Contact Tip E-CU M6*28*0.9mm
	Contact Tip E-CU M6*28*1.0mm
	Contact Tip E-CU M6*28*1.2mm
	Contact Tip E-CU M6*28*1.4mm
	Contact Tip E-CU M6*28*1.6mm
	Contact Tip CuCrZr M6*28*0.8mm
	Contact Tip CuCrZr M6*28*1.0mm
	Contact Tip CuCrZr M6*28*1.2mm
	Contact Tip CuCrZr M6*28*1.4mm
	Contact Tip CuCrZr M6*28*1.6mm
	Contact Tip E-CU Aluminum M6*28*0.8mm
	Contact Tip E-CU Aluminum M6*28*1.0mm
	Contact Tip E-CU Aluminum M6*28*1.2mm
	Contact Tip E-CU Aluminum M6*28*1.4mm
	Contact Tip E-CU Aluminum M6*28*1.6mm
C	Contact Tip Holder M6*22

No.	Description
	Contact Tip Holder M8*22
	Contact Tip Holder M6*25
	Contact Tip Holder M8*25
D	Gas Difuser DMC
	Gas Difuser ceramic
E	Red steel Liner 1.0-1.2mm 3m
	Red steel Liner 1.0-1.2mm 4m
	Red steel Liner 1.0-1.2mm 5m
1	Swan Neck
2	Handle XLMB EVO
3	Handle XLMB EVO PRO
4	Switch
5	Half Ring Red D=37mm
6	Cable Support
7	XLMB EVO 26 Power Cable 3m
	XLMB EVO 26 Power Cable 4m
	XLMB EVO 26 Power Cable 5m
	XLMB EVO PRO 26 Power Cable 3m
	XLMB EVO PRO 26 Power Cable 4m
	XLMB EVO PRO 26 Power Cable 5m
8	Support Spring
9	Rear Handle
10	Rear Connector Nut
11	Euro Central Connector KZ-2
12	Liner Positioner Nut M10x1

XLMB EVO 36

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

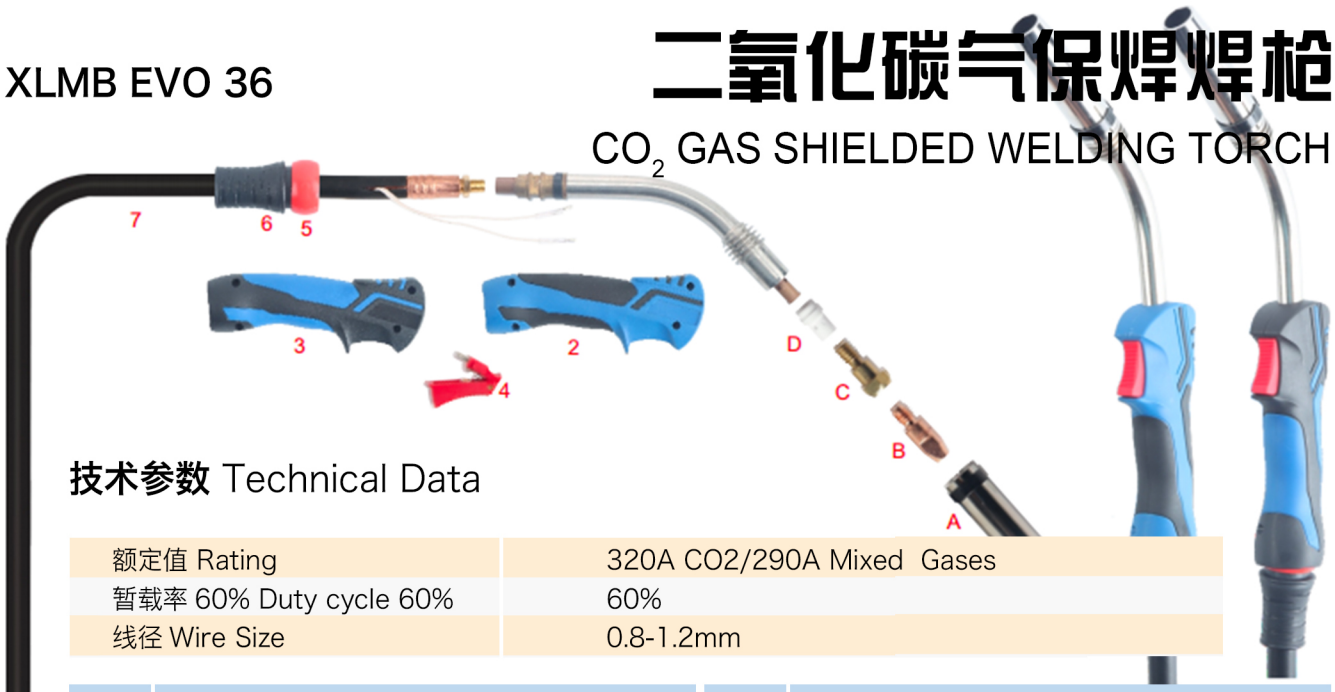

技术参数 Technical Data


额定值 Rating	320A CO2/290A Mixed Gases
暂载率 60% Duty cycle 60%	60%
线径 Wire Size	0.8-1.2mm

No.	Description	No.	Description
	XLMB EVO 36 Welding Torch 3m		Contact Tip E-CU Aluminum M8*30*1.6mm
	XLMB EVO 36 Welding Torch 4m		Contact Tip E-CU Aluminum M8*30*2.0mm
	XLMB EVO 36 Welding Torch 5m	C	Contact Tip Holder M6*28
	XLMB EVO PRO 36 Welding Torch 3m		Contact Tip Holder M6*32
	XLMB EVO PRO 36 Welding Torch 4m		Contact Tip Holder M8*28
	XLMB EVO PRO 36 Welding Torch 5m		Contact Tip Holder M8*34
A	Nozzle Tapered Φ12*84	D	Gas Diffuser DMC
	Nozzle Conical Φ16*84		Gas Diffuser Ceramic
	Nozzle Cylindrical Φ19*84	E	Yellow Steel Liner 1.2-1.6mm 3m
B	Contact Tip E-CU M8*30*0.8mm		Yellow Steel Liner 1.2-1.6mm 4m
	Contact Tip E-CU M8*30*1.0mm		Yellow Steel Liner 1.2-1.6mm 5m
	Contact Tip E-CU M8*30*1.2mm	1	Swan Neck
	Contact Tip E-CU M8*30*1.4mm	2	Handle XLMB EVO
	Contact Tip E-CU M8*30*1.6mm	3	Handle XLMB EVO PRO
	Contact Tip E-CU M8*30*2.0mm	4	Switch
	Contact Tip E-CU M8*30*2.4mm	5	Half Ring Red D=37mm
	Contact Tip CuCrZr M8*30*0.8mm	6	Cable Support
	Contact Tip CuCrZr M8*30*1.0mm	7	XLMB EVO 36 Power Cable 3m
	Contact Tip CuCrZr M8*30*1.2mm		XLMB EVO 36 Power Cable 4m
	Contact Tip CuCrZr M8*30*1.4mm		XLMB EVO 36 Power Cable 5m
	Contact Tip CuCrZr M8*30*1.6mm		XLMB EVO PRO 36 Power Cable 3m
	Contact Tip CuCrZr M8*30*2.0mm		XLMB EVO PRO 36 Power Cable 4m
	Contact Tip CuCrZr M8*30*2.4mm		XLMB EVO PRO 36 Power Cable 5m
	Contact Tip E-CU Aluminum M8*30*0.8mm	8	Support Spring
	Contact Tip E-CU Aluminum M8*30*1.0mm	9	Rear Handle
	Contact Tip E-CU Aluminum M8*30*1.2mm	10	Rear Connector Nut
	Contact Tip E-CU Aluminum M8*30*1.4mm	11	Euro Central Connector KZ-2
		12	Liner Positioner Nut M10x1




二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH




XLTBI 241
Cooling Method: Water Cooled
Rating: 300A CO_2
270A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm




XLTBI 411
Cooling Method: Water Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm



XLTBI 511
Cooling Method: Water Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm




XLMBI 7W
Cooling Method: Water Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm




XLTBI 8W
Cooling Method: Water Cooled
Rating: 550A CO_2
500A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.6-3.2mm



XLMBI 9W
Cooling Method: Water Cooled
Rating: 550A CO_2
500A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm



XLTBI XP363-DR
Cooling Method: Air Cooled
Rating: 340A CO_2
310A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm




XLTBI XP463-DR
Cooling Method: Air Cooled
Rating: 380A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm




XLTBI PRO 153
Cooling Method: Air Cooled
Rating: 180A CO_2
160A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm



XLTBI PRO 253
Cooling Method: Air Cooled
Rating: 230A CO_2
210A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm



XLTBI PRO 353
Cooling Method: Air Cooled
Rating: 300A CO_2
280A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm




XLTBI PRO 453
Cooling Method: Air Cooled
Rating: 360A CO_2
320A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm

XLTBi 150

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

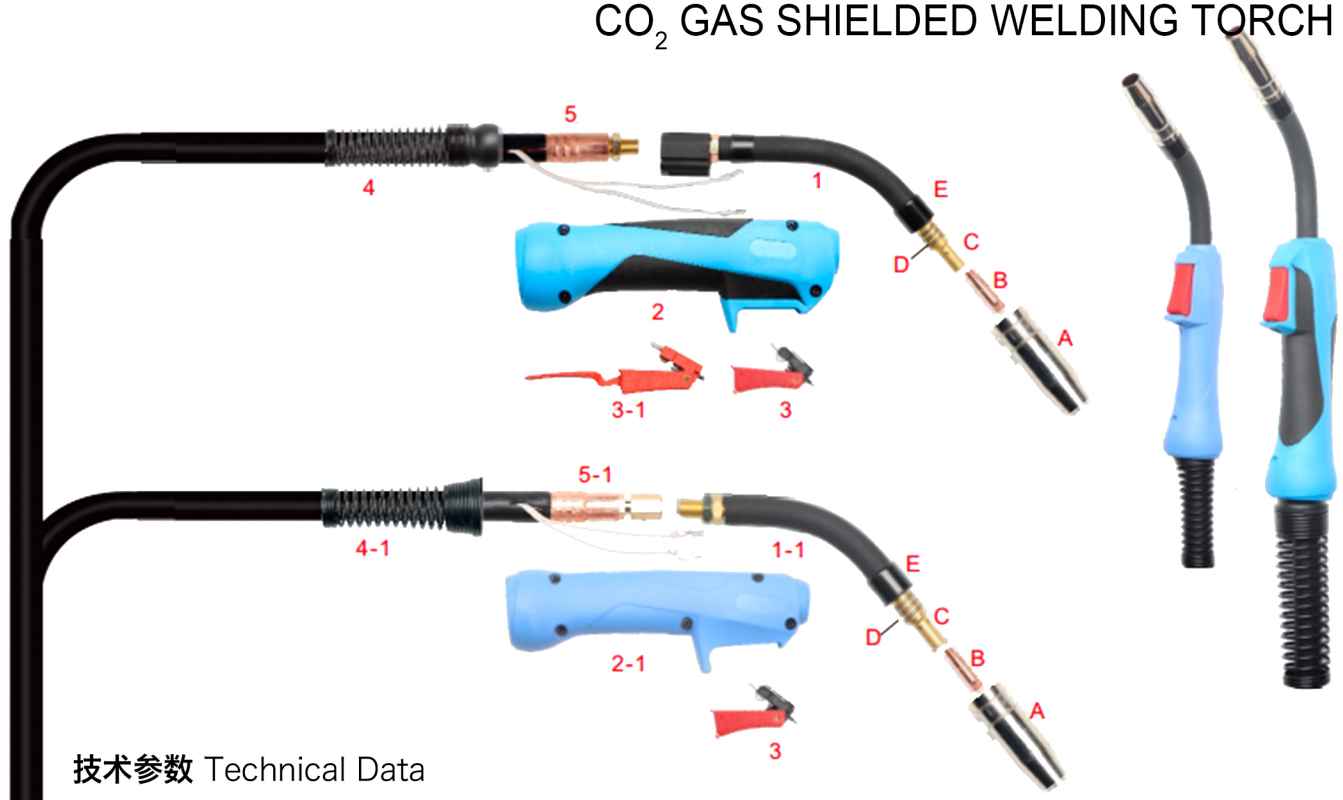

技术参数 Technical Data

额定值 Rating	180A CO2/150A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	0.6-1.0mm

No.	Description
	XLTBi 150 Expert Air Cooled Welding Torch 3m
	XLTBi 150 Expert Air Cooled Welding Torch 4m
	XLTBi 150 Expert Air Cooled Welding Torch 5m
	XLTBi 150 Expert Mini Air Cooled Welding Torch 3m
	XLTBi 150 Expert Mini Air Cooled Welding Torch 4m
	XLTBi 150 Expert Mini Air Cooled Welding Torch 5m
A	Nozzle Cylindrical Φ16*53
	Nozzle Conical Φ12*53
	Nozzle Tapered Φ9.5*53
B	Contact Tip E-CU M6*25
	Contact Tip CuCrZr M6*25
	Contact Tip E-CU Aluminum M6*25
C	Tip Holder
D	Spring Support
E	Head Insulatore

No.	Description
F	Liner Steel Insulation Blue Wire Φ0.8-1.0mm 3m
	Liner Steel Insulation Blue Wire Φ0.8-1.0mm 4m
	Liner Steel Insulation Blue Wire Φ0.8-1.0mm 5m
1	XLTBi 150 Swan Neck
1-1	XLTBi 150 Expert Mini Swan Neck
2	Handle Expert
2-1	Handle Expert Mini
3	Switch
3-1	Switch Long
4	Cable Ball joint & Support Spring
4-1	Support Spring Handle Expert Mini
5	Power Cable
5-1	Mini Power Cable
6	Support Spring
7	Rear Handle
8	Adaptor Nut M33x2
9	Euro Central Connector
10	Liner Positioner Nut M10x1



二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLTBi 240



技术参数 Technical Data

额定值 Rating	250A CO2/220A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	0.8-1.2mm

No.	Description
	XLTBi 240 Expert Air Cooled Welding Torch 3m
	XLTBi 240 Expert Air Cooled Welding Torch 4m
	XLTBi 240 Expert Air Cooled Welding Torch 5m
	XLTBi 240 Expert Mini Air Cooled Welding Torch 3m
	XLTBi 240 Expert Mini Air Cooled Welding Torch 4m
	XLTBi 240 Expert Mini Air Cooled Welding Torch 5m
A	Nozzle Cylindrical Φ17*63.5
	Nozzle Conical Φ12.5*63.5
	Nozzle Conical Φ10*63.5
B	Contact Tip E-CU M6*28
	Contact Tip CuCrZr M6*28
	Contact Tip E-CU Aluminum M6*28
C	Tip Holder M6*26
D	Gas Diffuser DMC
	Gas Difuser Ceramic

No.	Description
E	Liner Steel Insulation Red Wire Φ1.0-1.2mm 3m
	Liner Steel Insulation Red Wire Φ1.0-1.2mm 4m
	Liner Steel Insulation Red Wire Φ1.0-1.2mm 5m
1	XLTBi 240 Swan Neck
1-1	XLTBi 240 Expert Mini Swan Neck
2	Handle Expert
2-1	Handle Expert Mini
3	Switch
3-1	Switch Long
4	Cable Ball Joint & Support Spring
4-1	Support Spring Handle Expert Mini
5	Power Cable
5-1	Mini Power Cable
6	Support Spring
7	Rear Handle
8	Adaptor Nut M33x2
9	Euro Central Connector
10	Liner Positioner Nut M10x1

XLTBi 250

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



技术参数 Technical Data

额定值 Rating	230A CO2/200A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	0.8-1.2mm


No.	Description
	XLTBi 250 Expert Air Cooled Welding Torch 3m
	XLTBi 250 Expert Air Cooled Welding Torch 4m
	XLTBi 250 Expert Air Cooled Welding Torch 5m
	XLTBi 250 Expert Mini Air Cooled Welding Torch 3m
	XLTBi 250 Expert Mini Air Cooled Welding Torch 4m
	XLTBi 250 Expert Mini Air Cooled Welding Torch 5m
A	Nozzle Cylindrical Φ18*57
	Nozzle Conical Φ15*57
	Nozzle Tapered Φ11.5*57
B	Contact Tip E-CU M6*28
	Contact Tip CuCrZr M6*28
	Contact Tip E-CU Aluminum M6*28
C	Tip Holder M6*35
	Tip Holder M8*35
D	Nozzle Spring

No.	Description
E	Liner Steel Insulation Red Wire Φ1.0-1.2mm 3m
	Liner Steel Insulation Red Wire Φ1.0-1.2mm 4m
	Liner Steel Insulation Red Wire Φ1.0-1.2mm 5m
1	XLTBi 250 Swan Neck
1-1	XLTBi 250 Expert Mini Swan Neck
2	Handle Expert
2-1	Handle Expert Mini
3	Switch
3-1	Switch Long
4	Cable Ball Joint & Support Spring
4-1	Support Spring Handle Expert Mini
5	Power Cable
5-1	Mini Power Cable
6	Support Spring
7	Rear Handle
8	Adaptor Nut M33x2
9	Euro Central Connector
10	Liner Positioner Nut M10x1

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLTBi 260

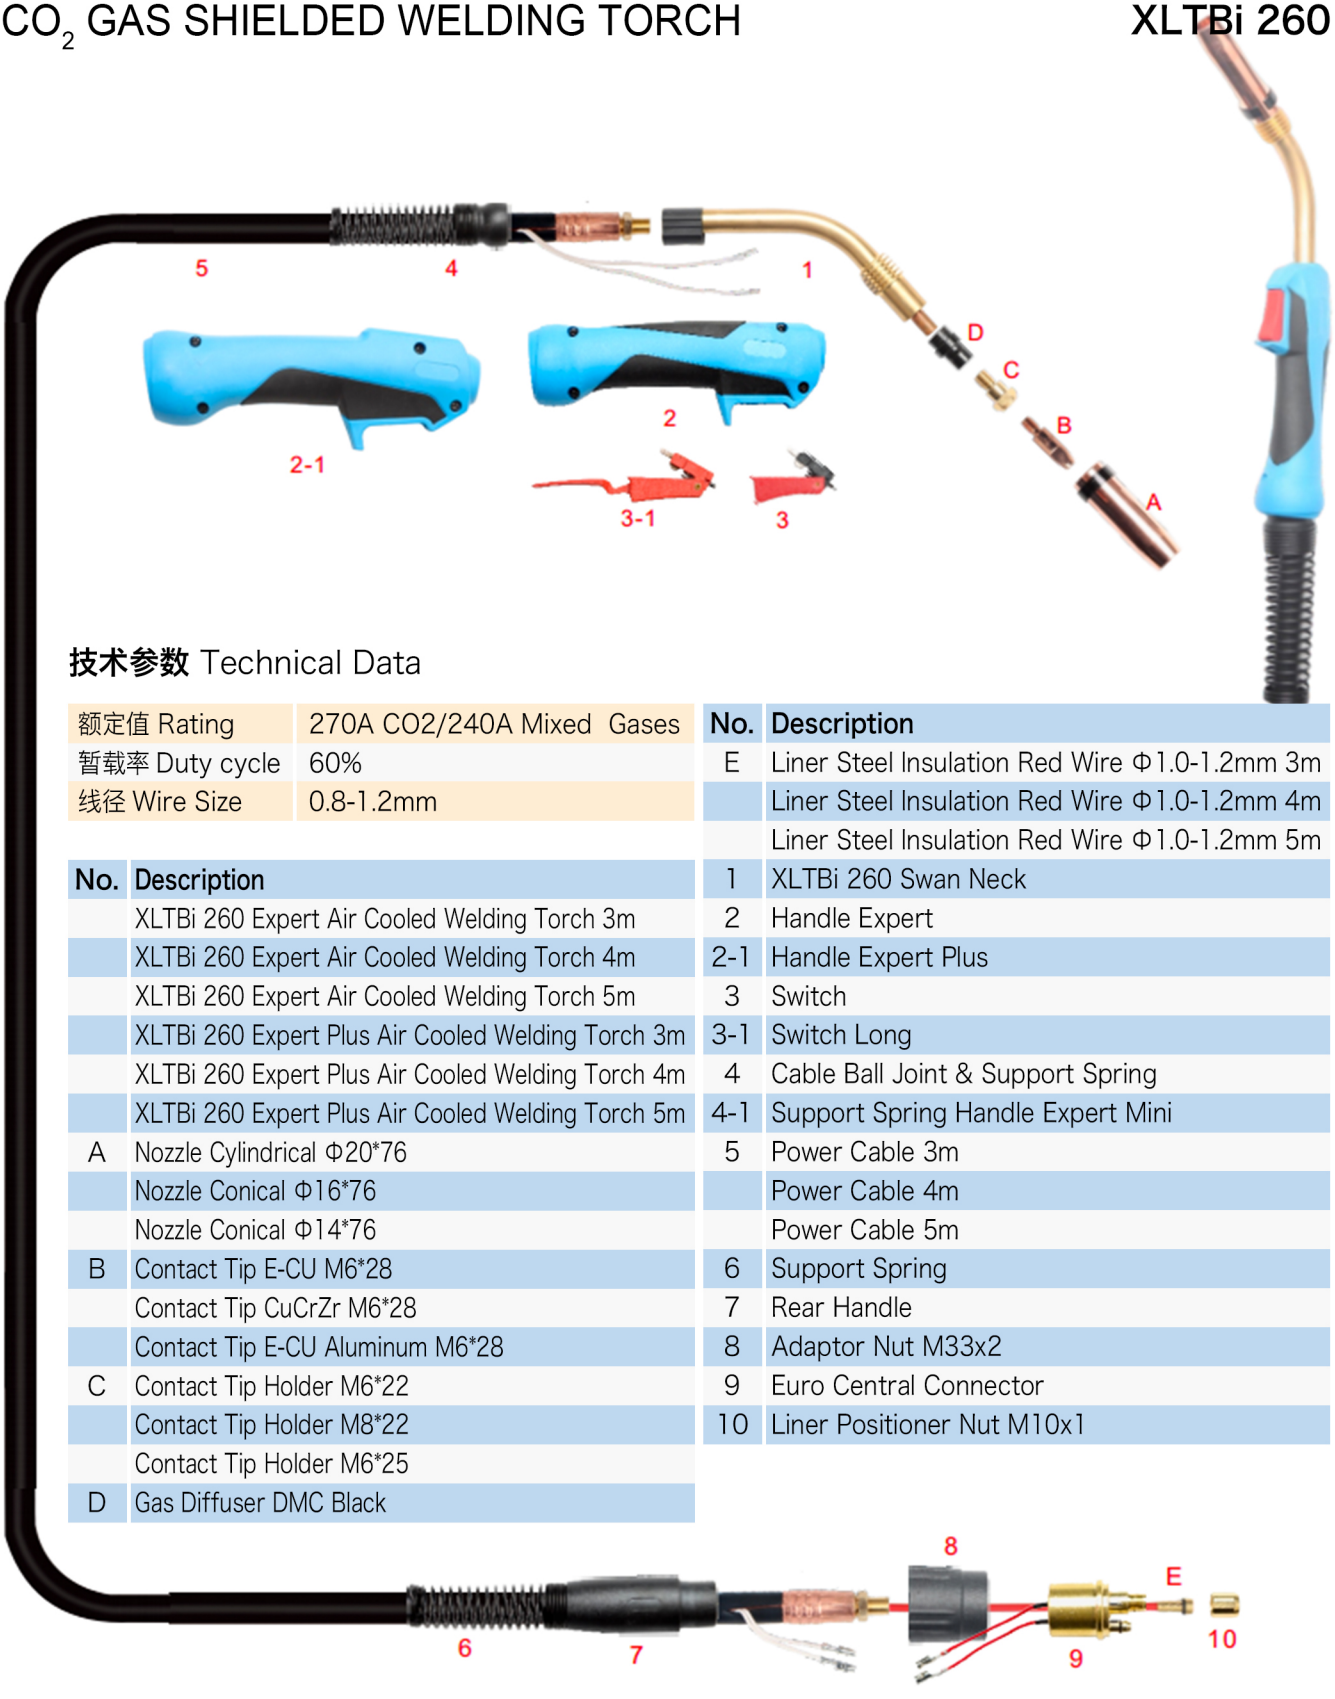

技术参数 Technical Data

额定值 Rating	270A CO2/240A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	0.8-1.2mm

No.	Description
	XLTBi 260 Expert Air Cooled Welding Torch 3m
	XLTBi 260 Expert Air Cooled Welding Torch 4m
	XLTBi 260 Expert Air Cooled Welding Torch 5m
	XLTBi 260 Expert Plus Air Cooled Welding Torch 3m
	XLTBi 260 Expert Plus Air Cooled Welding Torch 4m
	XLTBi 260 Expert Plus Air Cooled Welding Torch 5m
A	Nozzle Cylindrical Φ20*76
	Nozzle Conical Φ16*76
	Nozzle Conical Φ14*76
B	Contact Tip E-CU M6*28
	Contact Tip CuCrZr M6*28
	Contact Tip E-CU Aluminum M6*28
C	Contact Tip Holder M6*22
	Contact Tip Holder M8*22
	Contact Tip Holder M6*25
D	Gas Diffuser DMC Black

No.	Description
E	Liner Steel Insulation Red Wire Φ1.0-1.2mm 3m
	Liner Steel Insulation Red Wire Φ1.0-1.2mm 4m
	Liner Steel Insulation Red Wire Φ1.0-1.2mm 5m
1	XLTBi 260 Swan Neck
2	Handle Expert
2-1	Handle Expert Plus
3	Switch
3-1	Switch Long
4	Cable Ball Joint & Support Spring
4-1	Support Spring Handle Expert Mini
5	Power Cable 3m
	Power Cable 4m
	Power Cable 5m
6	Support Spring
7	Rear Handle
8	Adaptor Nut M33x2
9	Euro Central Connector
10	Liner Positioner Nut M10x1

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH




XLTW MINI 160A
Cooling Method: Air Cooled
Rating: 160A CO_2
100A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.0mm




XLTW1 180A
Cooling Method: Air Cooled
Rating: 180A CO_2
120A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm




XLTW2 200A
Cooling Method: Air Cooled
Rating: 200A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm




XLTW3 300A
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm




XLTW4 400A
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.6mm



XLTW5 500A
Cooling Method: Air Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.9-2.4mm




XLTW6 600A
Cooling Method: Air Cooled
Rating: 600A CO_2
550A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.2-3.2mm




XLTW2 PRO 200A
Cooling Method: Air Cooled
Rating: 200A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH




XLTW3 PRO 300A
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm




XLTW4 PRO 400A
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.6mm




XLTW5 PRO 500A
Cooling Method: Air Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.9-2.4mm



XLTW SPARY MASTER 250
Cooling Method: Air Cooled
Rating: 250A CO_2
220A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.2mm




XLTW SPARY MASTER 350
Cooling Method: Air Cooled
Rating: 350A CO_2
320A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.6mm



XLTW SPARY MASTER 450
Cooling Method: Air Cooled
Rating: 450A CO_2
420A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.6mm




XLTW SPARY MASTER PRO 250
Cooling Method: Air Cooled
Rating: 250A CO_2
220A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.2mm



XLTW SPARY MASTER PRO 350
Cooling Method: Air Cooled
Rating: 350A CO_2
320A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.6mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



XLTW SPARY MASTER PRO 450

Cooling Method: Air Cooled
Rating: 450A CO_2
420A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.6mm



XLTW FUSION 140 180 220

Cooling Method: Air Cooled
Rating: 140-220A CO_2
100-180A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm



XLTW SPARY MASTER V250

Cooling Method: Air Cooled
Rating: 250A CO_2
220A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.2mm




XLTW SPARY MASTER V350

Cooling Method: Air Cooled
Rating: 350A CO_2
320A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.8-1.2mm




XLTW SPARY MASTER V450

Cooling Method: Air Cooled
Rating: 450A CO_2
420A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.8-1.6mm



XLTW COMPACT ELIMINATOR 250

Cooling Method: Air Cooled
Rating: 250A CO_2
220A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.2mm



XLTW COMPACT ELIMINATOR 450

Cooling Method: Air Cooled
Rating: 450A CO_2
420A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.6mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLTW Mini 160A



技术参数 Technical Data

额定值 Rating	160A CO2/100A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.025"-.040" (0.6-1.0mm)

No.	Description
	TWMini 160A MIG Gun Tweco Connector10FT(3.0m)
	TWMini 160A MIG Gun Tweco Connector12FT(3.5m)
	TWMini 160A MIG Gun Tweco Connector15FT(4.5m)
A	Nozzle 3/8" 9.5mm
	Nozzle 1/2" 12.7mm
	Nozzle 5/8" 15.9mm
B	Contact Tip .023"0.6mm
	Contact Tip .030"0.8mm
	Contact Tip .035"0.9mm
	Contact Tip .040"1.0mm
	Contact Tip .045"1.2mm
	Contact Tip .023"0.6mm Tapered
	Contact Tip .030"0.8mm Tapered
	Contact Tip .035"0.9mm Tapered
	Contact Tip .040"1.0mm Tapered
	Contact Tip .045"1.2mm Tapered
C	Gas Diffuser

No.	Description
D	Liner for .025"-.035" (0.6-0.9mm)15FT(4.5mm)
	Liner for .035"-.045" (0.9-1.2mm)15FT(4.5mm)
	Liner Aluminum for .035" (0.9mm)15FT(4.5mm)
1	Gun Tube
2	Front Handle
3	Switch
4	Cable Assembly
5	Handle Cable Support Spring
6	Rear Handle
7	Tweco Mini Connector Plug
8	Control Wire 2-Spaded Lug 6.3mm

XLTW1 180A

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH




技术参数 Technical Data

额定值 Rating	180A CO2/120A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.025"-.045" (0.6-1.2mm)

No.	Description
A	Nozzle 3/8" 9.5mm
	Nozzle 1/2" 12.7mm
	Nozzle 5/8" 15.9mm
B	Contact Tip .023" 0.6mm
	Contact Tip .030" 0.8mm
	Contact Tip .035" 0.9mm
	Contact Tip .040" 1.0mm
	Contact Tip .045" 1.2mm
	Contact Tip Heavy Duty .030" 0.8mm
	Contact Tip Heavy Duty .035" 0.9mm
	Contact Tip Heavy Duty .040" 1.0mm
	Contact Tip Heavy Duty .045" 1.2mm
	Contact Tip Tapered .023" 0.6mm
	Contact Tip Tapered .030" 0.8mm
	Contact Tip Tapered .035" 0.9mm
	Contact Tip Tapered .040" 1.0mm
	Contact Tip Tapered .045" 1.2mm
C	Gas Diffuser
D	Liner for .030"-.035" (0.8-0.9mm) 10FT(3.0mm)

No.	Description
	Liner for .030"-.035" (0.8-0.9mm) 12FT(3.5mm)
	Liner for .030"-.035" (0.8-0.9mm) 15FT(4.5mm)
1	Gun tube 60°
1-1	Plastic Nut
2	Front Handle
3	Switch
4	Support Spring
5	Ball Joint
6	Cable Assyembly
7	Euro-Kwik Style Rear Connector
7-1	Rear Strain Relief Spring
7-2	Euro Rear Handle
7-3	Euro Nut
7-4	Euro Connector Tweco Style
7-5	Euro Conduit Cap
8	Economical Model Style Rear Connector
8-1	Rear Handle American Style
8-2	Miller Control Wire & Plug
8-3	Lincoln Control Wire & Plug
8-4	Tweco Control Wire & Scoket
8-5	Miller Socket To Lincoin Plug

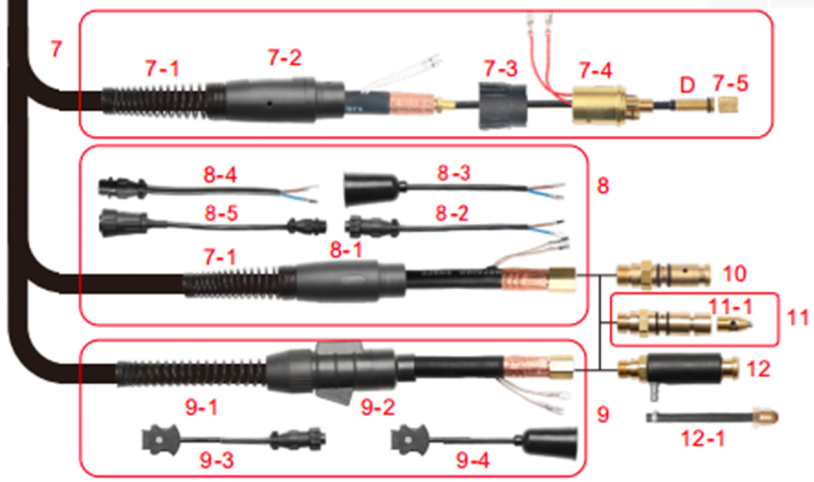

No.	Description
9	Original Style Rear Connector
9-1	Rear Strain Relief Spring
9-2	Rear Case Direct Plug Style
9-3	Miller Control Wire Direct Plug
9-4	Lincoln Control Wire Direct Plug
10	Tweco Connector Plug
11	Miller Connector Plug
11-1	Wire Guide Assembly Only
12	Lincoln Connector Plug
12-1	Gas Hose With Clamp

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLTW2 200A




技术参数 Technical Data

额定值 Rating	200A CO2/150A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.025"-.045"(0.6-1.2mm)

No.	Description
A	Nozzle 3/8" 9.5mm
	Nozzle 1/2" 12.7mm
	Nozzle 5/8" 15.9mm
	Nozzle Short Stop 3/8" 9.5mm
	Nozzle Short Stop 1/2" 12.7mm
	Nozzle Short Stop 5/8" 15.9mm
	Nozzle Tapered Short Stop 3/8" 9.5mm
A1	Nozzle 1/2" 12.7mm Standard
	Nozzle 5/8" 15.9mm Standard
	Nozzle 3/4" 19mm Standard
B/B1	Insulator
C	Contact Tip .023" 0.6mm Standard
	Contact Tip .030" 0.8mm Standard
	Contact Tip .035" 0.9mm Standard
	Contact Tip .040" 1.0mm Standard
	Contact Tip .045" 1.2mm Standard
	Contact Tip .052" 1.3mm Standard
	Contact Tip 1/16" 1.6mm Standard
	Contact Tip 5/64" 2.0mm Standard
	Contact Tip 3/64" AL 1.2mm Standard
	Contact Tips Heavy Duty

No.	Description
	Contact Tips Tapered
D/D1	Gas Diffuser
E	Liner for .040"-.045"(1.0-1.2mm) 10FT(3.0mm)
	Liner for .040"-.045"(1.0-1.2mm) 12FT(3.5mm)
	Liner for .040"-.045"(1.0-1.2mm) 15FT(4.5mm)
1	Gun tube 45°
	Gun tube 60°
2	Front Cable Assembly
3	Front Handle
4	Switch
5	Cable Ball Joint & Support Spring Small
6	Cable Assyembly
7	Euro-Kwik Style Rear Connector
7-1	Rear Strain Relief Spring
7-2	Euro Rear Handle
7-3	Euro Nut
7-4	Euro Connector Tweco Style
7-5	Euro Conduit Cap
8	Economical Model Style Rear Connector
8-1	Rear Handle American Style
8-2	Miller Control Wire & Plug
8-3	Lincoln Control Wire & Plug

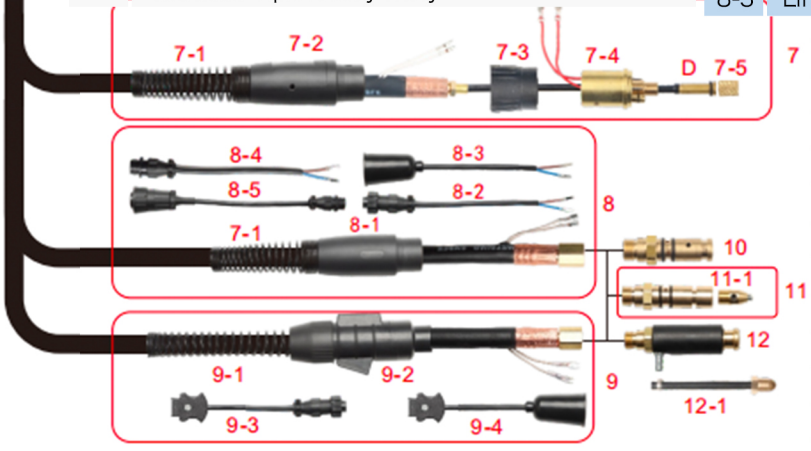

No.	Description
8-4	Tweco Control Wire & Scoket
8-5	Miller Socket To Lincoin Plug
9	Original Style Rear Connector
9-1	Rear Strain Relief Spring
9-2	Rear Case Direct Plug Style
9-3	Miller Control Wire Direct Plug
9-4	Lincoln Control Wire Direct Plug
10	Tweco Connector Plug
11	Miller Connector Plug
11-1	Wire Guide Assembly Only
12	Lincoln Connector Plug
12-1	Gas Hose With Clamp

XLTW3 300A

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH




技术参数 Technical Data

额定值 Rating	300A CO2/250A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.025"-.045" (0.6-1.2mm)

No.	Description
A	Nozzle 3/8" 9.5mm
	Nozzle 1/2" 12.7mm
	Nozzle 5/8" 15.9mm
	Nozzle 3/4" 19mm
	Nozzle Flush 1/2" 12.7mm
	Nozzle Flush 5/8" 15.9mm
	Nozzle Flush 3/4" 19mm
	Nozzle 1/2" 12.7mm Heavy Duty
	Nozzle 5/8" 15.9mm Heavy Duty
	Nozzle Flush 5/8" 15.9mm Heavy Duty
	Nozzle 3/4" 19mm Heavy Duty
	Nozzle 3/8" 9.5mm Tapered
	Nozzle Flush 3/8" 9.5mm Tapered
B	Contact Tip .023" 0.6mm Standard
	Contact Tip .030" 0.8mm Standard
	Contact Tip .035" 0.9mm Standard
	Contact Tip .040" 1.0mm Standard
	Contact Tip .045" 1.2mm Standard
	Contact Tip .052" 1.3mm Standard
	Contact Tip 1/16" 1.6mm Standard
	Contact Tip 5/64" 2.0mm Standard

No.	Description
	Contact Tip 3/64" AL 1.2mm Standard
	Contact Tips Heavy Duty
	Contact Tips Tapered
C	Gas Diffuser
D	Liner for .035"-.045" (0.9-1.2mm) 10FT(3.0mm)
	Liner for .035"-.045" (0.9-1.2mm) 12FT(3.5mm)
	Liner for .035"-.045" (0.9-1.2mm) 15FT(4.5mm)
1	Gun tube 45°
	Gun tube 60°
2	Front Cable Assembly
3	Front Handle
4	Switch
5	Cable Ball Joint & Support Spring Small
6	Cable Assyembly
7	Euro-Kwik Style Rear Connector
7-1	Rear Strain Relief Spring
7-2	Euro Rear Handle
7-3	Euro Nut
7-4	Euro Connector Tweco Style
7-5	Euro Conduit Cap
8	Economical Model Style Rear Connector
8-1	Rear Handle American Style

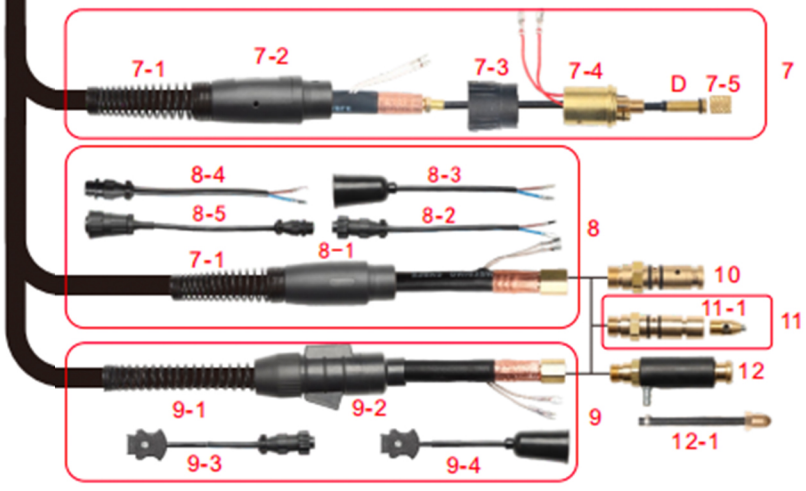

No.	Description
8-2	Miller Control Wire & Plug
8-3	Lincoln Control Wire & Plug
8-4	Tweco Control Wire & Scoket
8-5	Miller Socket To Lincoin Plug
9	Original Style Rear Connector
9-1	Rear Strain Relief Spring
9-2	Rear Case Direct Plug Style
9-3	Miller Control Wire Direct Plug
9-4	Lincoln Control Wire Direct Plug
10	Tweco Connector Plug
11	Miller Connector Plug
11-1	Wire Guide Assembly Only
12	Lincoln Connector Plug
12-1	Gas Hose With Clamp

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



XLTW OCIM RB28
Cooling Method: Air Cooled
Rating: 260A CO_2
220A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm



XLTW OCIM RB36
Cooling Method: Air Cooled
Rating: 300A CO_2
270A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm



XLTW OCIM RB40
Cooling Method: Air Cooled
Rating: 360A CO_2
320A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.0-1.6mm



XLTW OCIM RH302
Cooling Method: Water Cooled
Rating: 350A CO_2
300A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.2mm



XLTW OCIM RH502
Cooling Method: Water Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm



XLTW OCIM RM552
Cooling Method: Water Cooled
Rating: 550A CO_2
500A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm




XLTW OCIM RM652
Cooling Method: Water Cooled
Rating: 650A CO_2
600A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.2-2.4mm

XLTW OCIM RB28

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

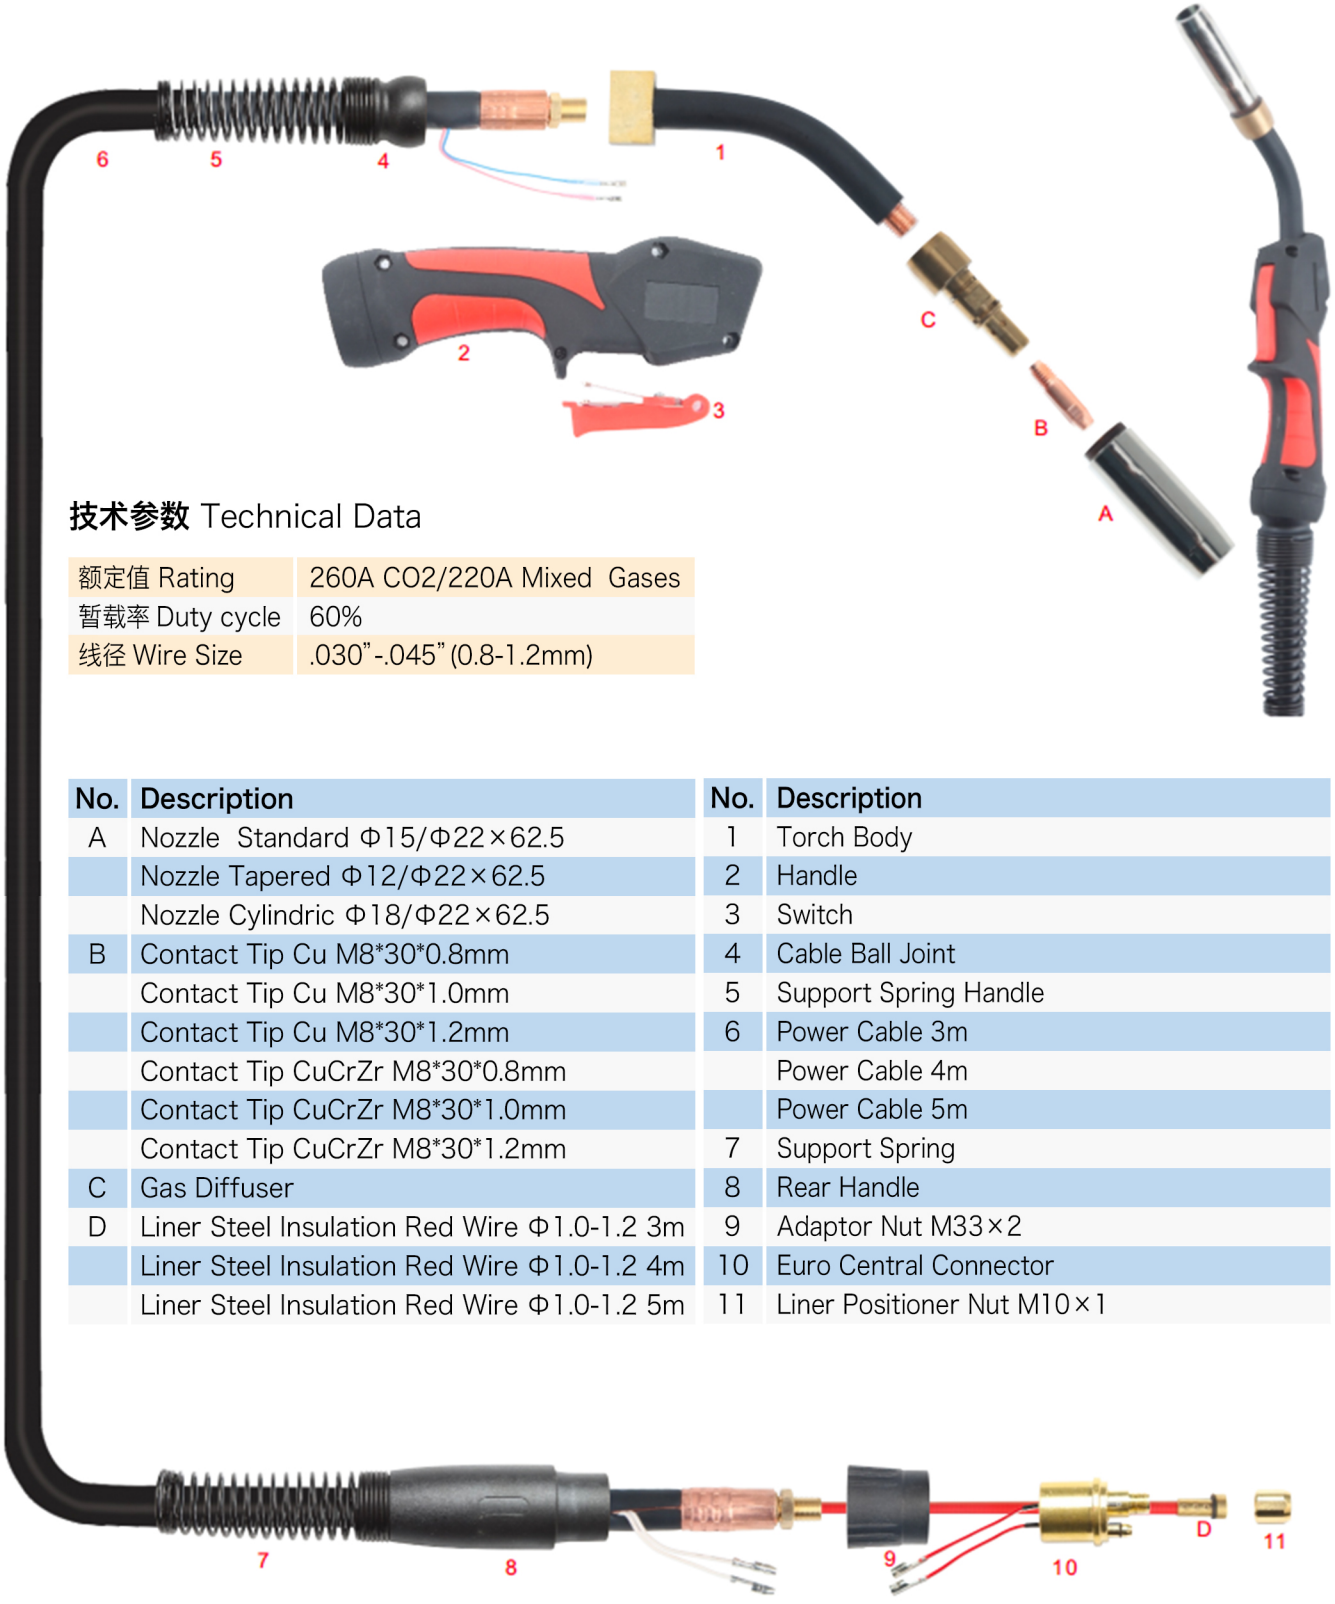

技术参数 Technical Data


额定值 Rating	260A CO2/220A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.030"-.045" (0.8-1.2mm)

No.	Description	No.	Description
A	Nozzle Standard Φ15/Φ22×62.5	1	Torch Body
	Nozzle Tapered Φ12/Φ22×62.5	2	Handle
	Nozzle Cylindric Φ18/Φ22×62.5	3	Switch
B	Contact Tip Cu M8*30*0.8mm	4	Cable Ball Joint
	Contact Tip Cu M8*30*1.0mm	5	Support Spring Handle
	Contact Tip Cu M8*30*1.2mm	6	Power Cable 3m
	Contact Tip CuCrZr M8*30*0.8mm		Power Cable 4m
	Contact Tip CuCrZr M8*30*1.0mm		Power Cable 5m
	Contact Tip CuCrZr M8*30*1.2mm	7	Support Spring
C	Gas Diffuser	8	Rear Handle
D	Liner Steel Insulation Red Wire Φ1.0-1.2 3m	9	Adaptor Nut M33×2
	Liner Steel Insulation Red Wire Φ1.0-1.2 4m	10	Euro Central Connector
	Liner Steel Insulation Red Wire Φ1.0-1.2 5m	11	Liner Positioner Nut M10×1

二氧化碳气保焊焊枪

XLTW OCIM RB36

CO_2 GAS SHIELDED WELDING TORCH

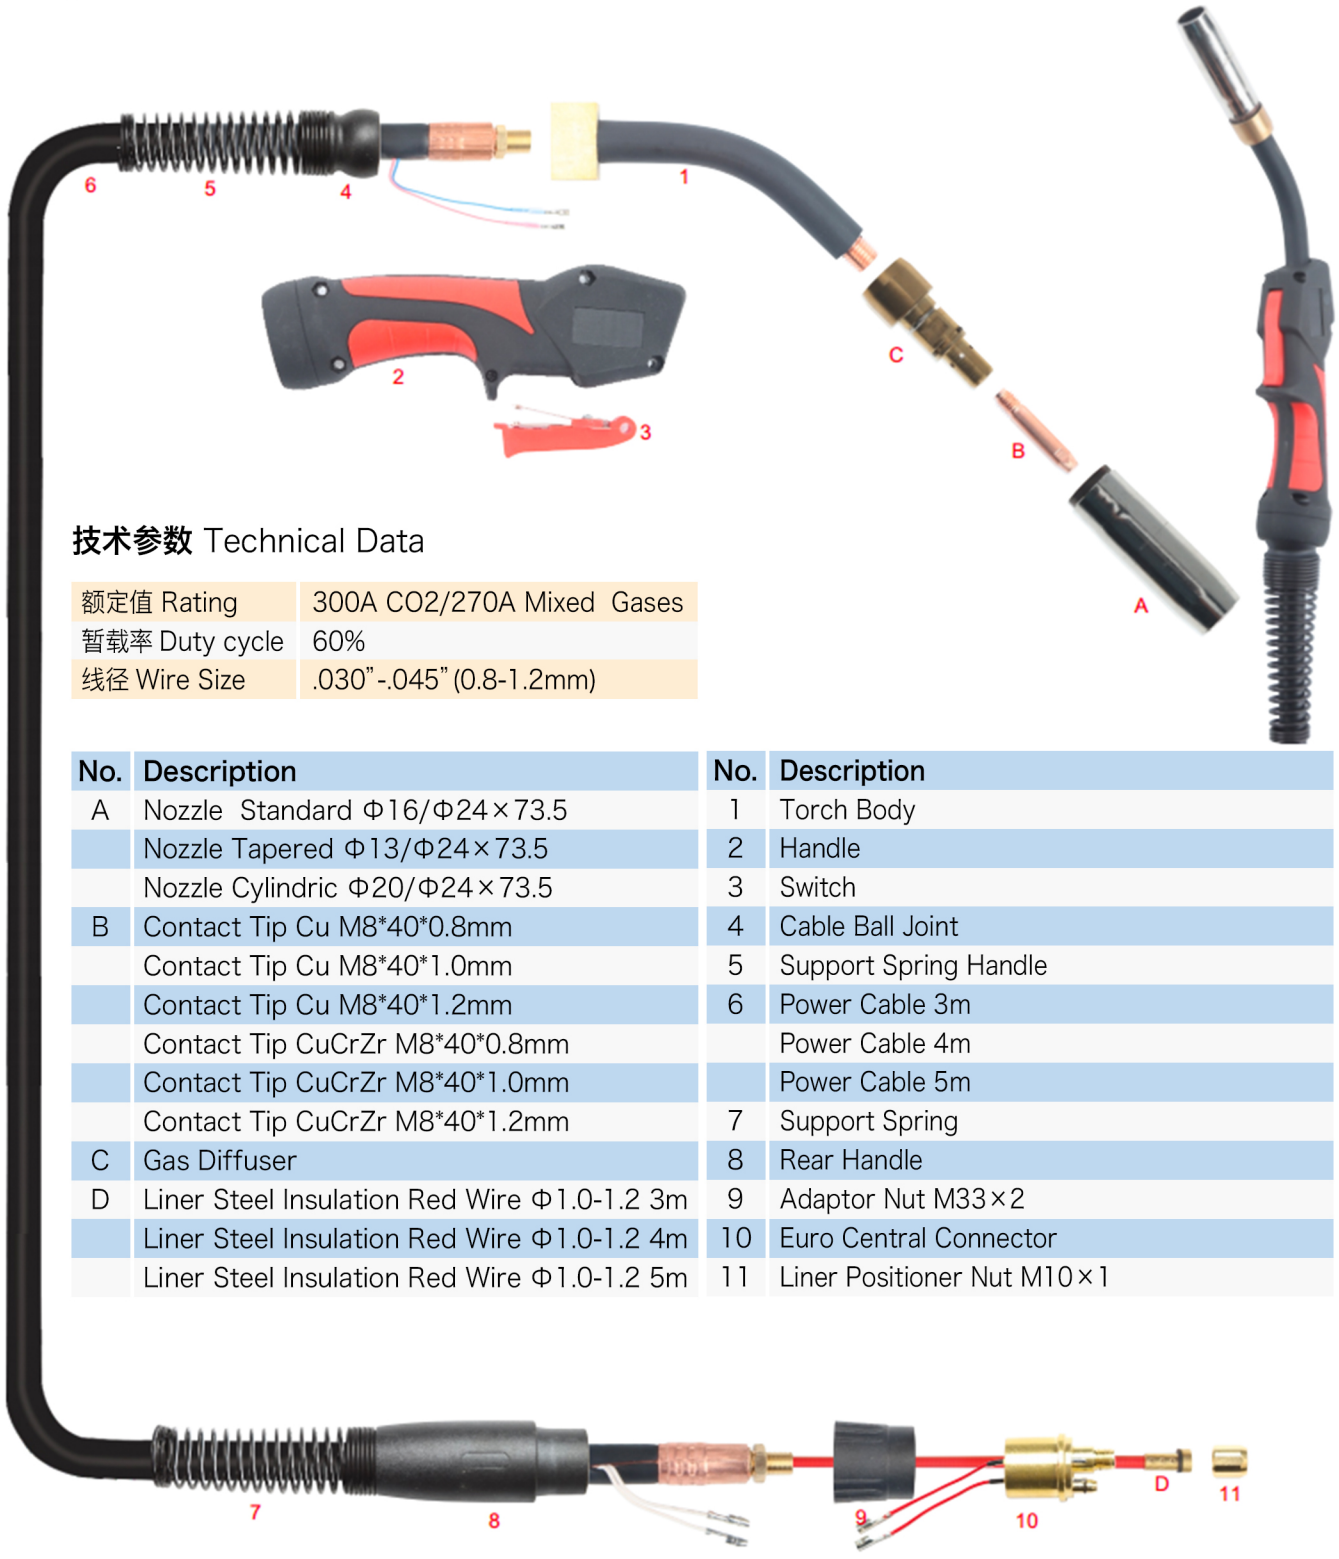

技术参数 Technical Data

额定值 Rating	300A CO2/270A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.030"-.045" (0.8-1.2mm)


No.	Description
A	Nozzle Standard Φ16/Φ24×73.5
	Nozzle Tapered Φ13/Φ24×73.5
	Nozzle Cylindric Φ20/Φ24×73.5
B	Contact Tip Cu M8*40*0.8mm
	Contact Tip Cu M8*40*1.0mm
	Contact Tip Cu M8*40*1.2mm
	Contact Tip CuCrZr M8*40*0.8mm
	Contact Tip CuCrZr M8*40*1.0mm
	Contact Tip CuCrZr M8*40*1.2mm
C	Gas Diffuser
D	Liner Steel Insulation Red Wire Φ1.0-1.2 3m
	Liner Steel Insulation Red Wire Φ1.0-1.2 4m
	Liner Steel Insulation Red Wire Φ1.0-1.2 5m

No.	Description
1	Torch Body
2	Handle
3	Switch
4	Cable Ball Joint
5	Support Spring Handle
6	Power Cable 3m
	Power Cable 4m
	Power Cable 5m
7	Support Spring
8	Rear Handle
9	Adaptor Nut M33×2
10	Euro Central Connector
11	Liner Positioner Nut M10×1

XLTW OCIM RB40

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

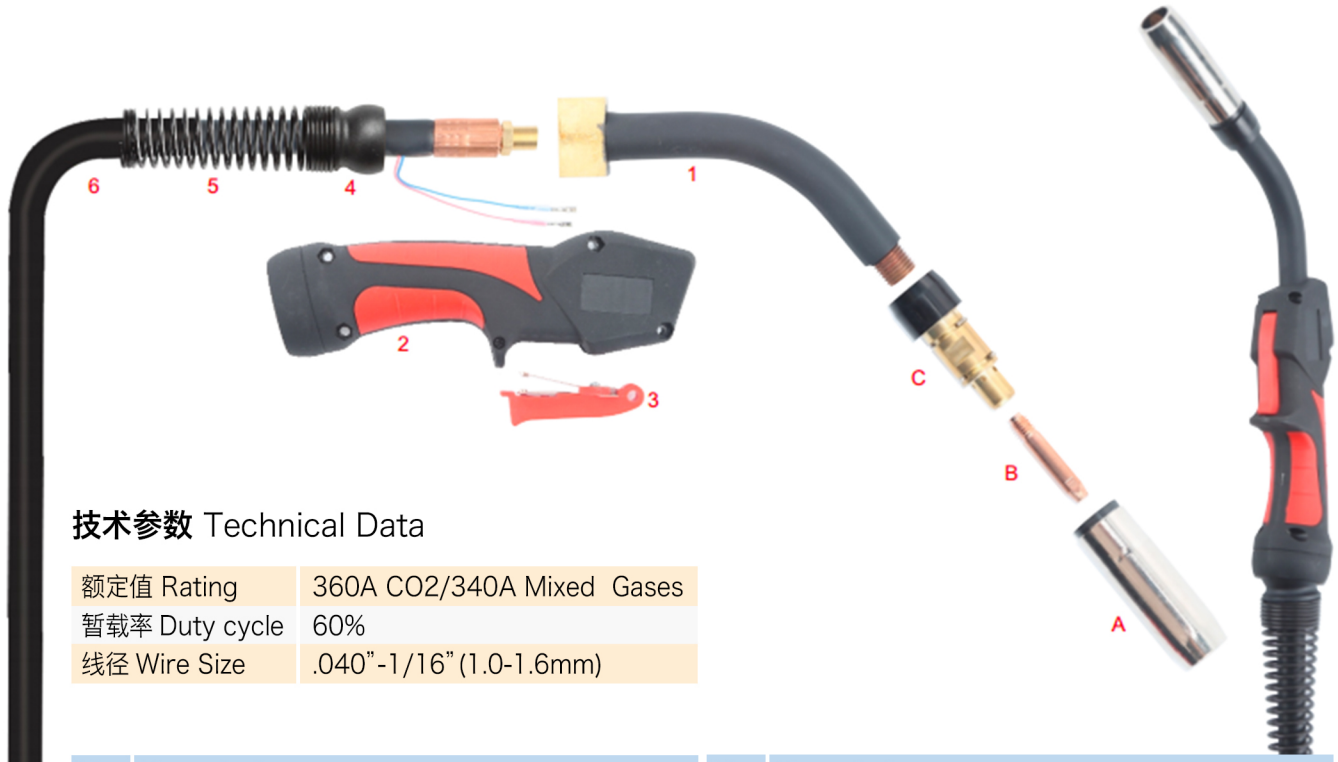


技术参数 Technical Data

额定值 Rating	360A CO2/340A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.040"-1/16"(1.0-1.6mm)

No.	Description
A	Nozzle Standard Φ17/Φ26×75
	Nozzle Tapered Φ15.5/Φ26×75
	Nozzle Cylindric Φ22/Φ26×75
B	Contact Tip Cu M8*40*0.8mm
	Contact Tip Cu M8*40*1.0mm
	Contact Tip Cu M8*40*1.2mm
	Contact Tip Cu M8*40*1.4mm
	Contact Tip Cu M8*40*1.6mm
	Contact Tip CuCrZr M8*40*0.8mm
	Contact Tip CuCrZr M8*40*1.0mm
	Contact Tip CuCrZr M8*40*1.2mm
	Contact Tip CuCrZr M8*40*1.4mm
	Contact Tip CuCrZr M8*40*1.6mm
C	Gas Diffuser
D	Liner Steel Insulation Red Wire Φ1.2-1.6 3m

No.	Description
	Liner Steel Insulation Red Wire Φ1.2-1.6 4m
	Liner Steel Insulation Red Wire Φ1.2-1.6 5m
1	Torch Body
2	Handle
3	Switch
4	Cable Ball Joint
5	Support Spring Handle
6	Power Cable 3m
	Power Cable 4m
	Power Cable 5m
7	Support Spring
8	Rear Handle
9	Adaptor Nut M33×2
10	Euro Central Connector
11	Liner Positioner Nut M10×1

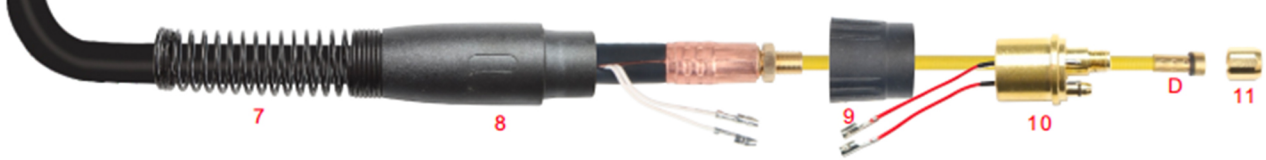

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH




LINCMIG 100L
Cooling Method: Air Cooled
Rating: 100A CO_2
60A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.2mm




LINCMIG 250L
Cooling Method: Air Cooled
Rating: 250A CO_2
120A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.2mm




LINCMIG 200
Cooling Method: Air Cooled
Rating: 200A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm



LINCMIG 300
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-2.0mm



LINCMIG 400
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-2.0mm



LINCMIG 550
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.9-3.2mm



LINCMIG PRO100L
Cooling Method: Air Cooled
Rating: 100A CO_2
60A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.2mm




LINCMIG PRO175L
Cooling Method: Air Cooled
Rating: 175A CO_2
220A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.2mm




LINCMIG PRO250L
Cooling Method: Air Cooled
Rating: 250A CO_2
120A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.2mm



LINCMIG PRO CURVE 200
Cooling Method: Air Cooled
Rating: 200A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm



LINCMIG PRO CURVE 300
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-2.0mm



LINCMIG PRO CURVE 400
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-2.0mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



LINCMIG PRO CURVE 550
Cooling Method: Air Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-2.4mm



LINCMIG PRO CURVE HDE 250
Cooling Method: Air Cooled
Rating: 250A CO_2
250A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.6-1.2mm




LINCMIG PRO CURVE HDE 350
Cooling Method: Air Cooled
Rating: 350A CO_2
350A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.9-2.0mm



LINCMIG PRO CURVE HDE 450
Cooling Method: Air Cooled
Rating: 450A CO_2
450A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.9-2.0mm




LINCMIG PRO CURVE HDE 550
Cooling Method: Air Cooled
Rating: 550A CO_2
500A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.9-3.2mm




LINCMIG K126 PRO
Cooling Method: Air Cooled
Rating: 350A CO_2
Duty Cycle: 60%
Wire Size: 0.9-3.0mm



LINCMIG K126
Cooling Method: Air Cooled
Rating: 350A CO_2
Duty Cycle: 60%
Wire Size: 1.6-2.4mm



LINCMIG K354
Cooling Method: Air Cooled
Rating: 350A CO_2
Duty Cycle: 60%
Wire Size: 1.7-2.0mm



LINCMIG K231-1
Submerged Arc Contact Nozzle Assembly
Rating: 600A
Wire Size: 2.0-5.6mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



XLBND200
Cooling Method: Air Cooled
Rating: 200A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm




XLBND300
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm



XLBND350
Cooling Method: Air Cooled
Rating: 350A CO_2
300A Mixed Gases
Duty Cycle: 80%
Wire Size: 0.6-1.2mm




XLBND400
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.6mm




XLBND Q20"B" HANDLE
Cooling Method: Air Cooled
Rating: 200A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm




XLBND Q30 "B" HANDLE
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm




XLBND Q40 "B" HANDLE
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-2.0mm




XLBND Q50 "B" HANDLE
Cooling Method: Air Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.9-2.4mm




XLBND Q30"O" HANDLE
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm



XLBND Q40"O" HANDLE
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-2.0mm



XLBND Q50 "O" HANDLE
Cooling Method: Air Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.9-2.4mm



XLBND Q60 "O" HANDLE
Cooling Method: Air Cooled
Rating: 600A CO_2
550A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.2-3.2mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



XLBND Q30 "T" HANDLE
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm



XLBND Q40 "T" HANDLE
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.6mm



XLBND Q50 "T" HANDLE
Cooling Method: Air Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.9-2.4mm




XLBND Q60 "T" HANDLE
Cooling Method: Air Cooled
Rating: 600A CO_2
550A Mixed Gases
Duty Cycle: 60%
Wire Size: 1.2-3.2mm




XLM-10/M-100
Cooling Method: Air Cooled
Rating: 100A CO_2
60A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-0.9mm




XLM-15/M-150
Cooling Method: Air Cooled
Rating: 150A CO_2
90A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-0.9mm




XLM-25
Cooling Method: Air Cooled
Rating: 250A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLM-25
Cooling Method: Air Cooled
Rating: 250A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm




XLM-40
Cooling Method: Air Cooled
Rating: 400A CO_2
240A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.9-1.6mm



XLMDX-100
Cooling Method: Air Cooled
Rating: 100A CO_2
60A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-0.9mm



XLMDX-250
Cooling Method: Air Cooled
Rating: 250A CO_2
150A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.8-1.2mm



XLROUGHNECK C-SERIES 300A
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.2mm

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH



XLROUGHNECK C-SERIES 400A
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 60%
Wire Size: 0.6-1.6mm




XLAL2300
Cooling Method: Air Cooled
Rating: 230A CO_2
200A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.0mm



XLAL3000
Cooling Method: Air Cooled
Rating: 300A CO_2
250A Mixed Gases
Duty Cycle: 40%
Wire Size: 1.0-1.2mm




XLAL4000
Cooling Method: Air Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 40%
Wire Size: 1.2-1.6mm



XLAW2500
Cooling Method: Water Cooled
Rating: 250A CO_2
200A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.6-1.2mm



XLAW4000
Cooling Method: Water Cooled
Rating: 400A CO_2
350A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.2mm



XLAW5000
Cooling Method: Water Cooled
Rating: 500A CO_2
450A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm



XLMTG2100S
Cooling Method: Air Cooled
Rating: 250A CO_2
170A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.2mm



XLMTG2500S
Cooling Method: Air Cooled
Rating: 250A CO_2
170A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.6-1.2mm



XLMTG250I
Cooling Method: Air Cooled
Rating: 250A CO_2
170A Mixed Gases
Duty Cycle: 40%
Wire Size: 0.8-1.2mm



XLMTG320I
Cooling Method: Air Cooled
Rating: 320A CO_2
210A Mixed Gases
Duty Cycle: 40%
Wire Size: 1.0-1.6mm



XLMTG400I
Cooling Method: Air Cooled
Rating: 400A CO_2
260A Mixed Gases
Duty Cycle: 40%
Wire Size: 1.0-1.6mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



XLMTG550I
Cooling Method: Air Cooled
Rating: 520A CO_2
360A Mixed Gases
Duty Cycle: 30%
Wire Size: 1.2-1.6mm




MMG20/MMG22
Cooling Method: Gas Cooled
Rating: 180A Maxed Gases
Duty Cycle: 20%
Wire Size: 0.6-1.0mm



MMT/PMT25
Cooling Method: Gas Cooled
Rating: 250A Mixed Gases
Duty Cycle: 35%
Wire Size: 0.6-1.2mm



MMT/PMT27
Cooling Method: Gas Cooled
Rating: 270A Mixed Gases
Duty Cycle: 35%
Wire Size: 0.6-1.2mm




MMT/PMT32
Cooling Method: Gas Cooled
Rating: 320A Mixed Gases
Duty Cycle: 35%
Wire Size: 0.8-1.6mm




MMT/PMT35
Cooling Method: Gas Cooled
Rating: 350A Mixed Gases
Duty Cycle: 35%
Wire Size: 0.8-1.6mm




MMT/PMT42
Cooling Method: Gas Cooled
Rating: 420A Mixed Gases
Duty Cycle: 35%
Wire Size: 0.8-1.6mm




MT38
Cooling Method: Gas Cooled
Rating: 420A Mixed Gases
Duty Cycle: 35%
Wire Size: 0.8-1.6mm



PMT MN
Cooling Method: Gas Cooled
Rating: 420A Mixed Gases
Duty Cycle: 35%
Wire Size: 0.6-1.6mm



MMT/PMT42W
Cooling Method: Water Cooled
Rating: 400A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.6mm



MMT/PMT52W
Cooling Method: Water Cooled
Rating: 500A Mixed Gases
Duty Cycle: 100%
Wire Size: 0.8-1.6mm



MT51MW
Cooling Method: Water Cooled
Rating: 500A Mixed Gases
Duty Cycle: 100%
Wire Size: 1.0-1.6mm

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



Technical Data	XLSP15	XLSP24	XLSP15
Cooling Method:	Air Cooled	Air Cooled	Air Cooled
Rating: CO_2	180A	250A	230A
Rating: Mixed Gas	150A	220A	200A
Duty Cycle:	60%	60%	60%
Wire Size: AL	0.8-1.0mm	0.8-1.2mm	0.8-1.2mm
Wire Size: Steel	0.8-1.0mm	0.8-1.0mm	0.8-1.0mm
Motor Voltage	24V DC	24V DC	24V DC

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



Technical Data	XLSP36	XLSPTW2	XLSPTW4
Cooling Method:	Air Cooled	Air Cooled	Air Cooled
Rating: CO_2	300A	250A	300A
Rating: Mixed Gas	270A	220A	270A
Duty Cycle:	60%	60%	60%
Wire Size: AL	0.8-1.2mm	0.8-1.2mm	0.8-1.2mm
Wire Size: Steel	0.8-1.0mm	0.8-1.0mm	0.8-1.0mm
Motor Voltage	24V DC	24V DC	24V DC

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH



Technical Data	XLSP100E	XLSP100T	XLSP100L	XLSP100M
Cooling Method:	Air Cooled	Air Cooled	Air Cooled	Air Cooled
Rating: CO_2	130A	130A	130A	130A
Rating: Mixed Gas	100A	100A	100A	100A
Duty Cycle:	30%	30%	30%	30%
Wire Size: AL	0.8-0.9mm	0.8-0.9mm	0.8-0.9mm	0.8-0.9mm
Wire Size: Steel	0.6-0.9mm	0.6-0.9mm	0.6-0.9mm	0.6-0.9mm
Motor Voltage	24V DC	24V DC	24V DC	24V DC

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH




Technical Data	XLSpoolmate100	XLSP200	XLSP200H	XLSP200E
Cooling Method:	Air Cooled	Air Cooled	Air Cooled	Air Cooled
Rating: CO_2	135A	160A	160A	160A
Rating: Mixed Gas	100A	130A	130A	130A
Duty Cycle:	35%	60%	60%	60%
Wire Size: AL	0.8-0.9mm	0.8-0.9mm	0.8-0.9mm	0.8-0.9mm
Wire Size: Steel	0.6-0.9mm	0.6-0.9mm	0.6-0.9mm	0.6-0.9mm
Motor Voltage	24V DC	24V DC	24V DC	24V DC

二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

Step 1	Step 2	Step 3	Step 4	Step 5
Troch Model	Motor	Potentiometer	Cable Length	Cable Termination

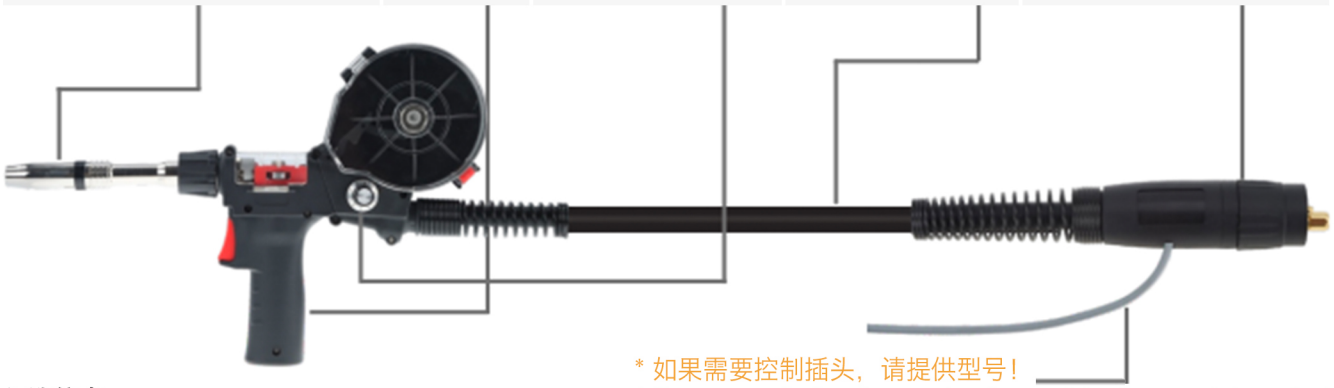

* 如果需要控制插头，请提供型号！
* If a control plug is required, provide the modelnumbe!

订购信息 Ordering Information

包装部件编号采用下述简单的 5 阶段系统进行配置：

Torch package part numbering is configured using the simple 5 stage-system outlined below:

1. 选择正确的焊枪型号 Select the correct model of torch
2. 选择所需的电机电压 Select the motor voltage required
3. 如有需要，选择电位计的值 Select the potentiometer value if required
4. 选择所需电缆的长度 Select the length ofcable required
5. 选择所需的电缆端接方式 Select the cable termination reguired

示例：XLSP24P320ER

Spool-On 240A Air-Cooled Mig Torch 6m 24V Motor，10K Potentiometer，Euro Connector

Step 1	Step 2	Step 3	Step 4	Step 5
Troch Model	Motor	Potentiometer	Cable Length	Cable Termination

Part No.	Description
XLSP15	150A Torch Range
XLSP24	240A Torch Range
XLSP25	250A Torch Range
XLSP36	360A Torch Range
XLSPTW2	250ATW Torch Range
XLSPTW4	360ATW Torch Range

Part No.	Description
24	Motor 24V DC

Part No.	Description
P1	Potentiometer kit 1K
P2	Potentiometer Kit 5K
P3	Potentiometer Kit 10K
P4	Potentiometer Kit 25K
N	No Potentiometer

Part No.	Description
13	13f(4m)
20	20ft(6m)
26	26ft(8m)
33	33ft(10m)
40	40f(12m)

Part No.	Description
ER	Euro Connector
ML	Miller Connector
TW	Tweco Connector
LK	Euro Connector
DN	35-50 Male Plug




二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLSP15 SPOOLON MLG TORCH

技术参数 Technical Data

额定值 Rating	180A CO2/150A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.030"-.040"(0.8-1.0mm) (AL-Steel)

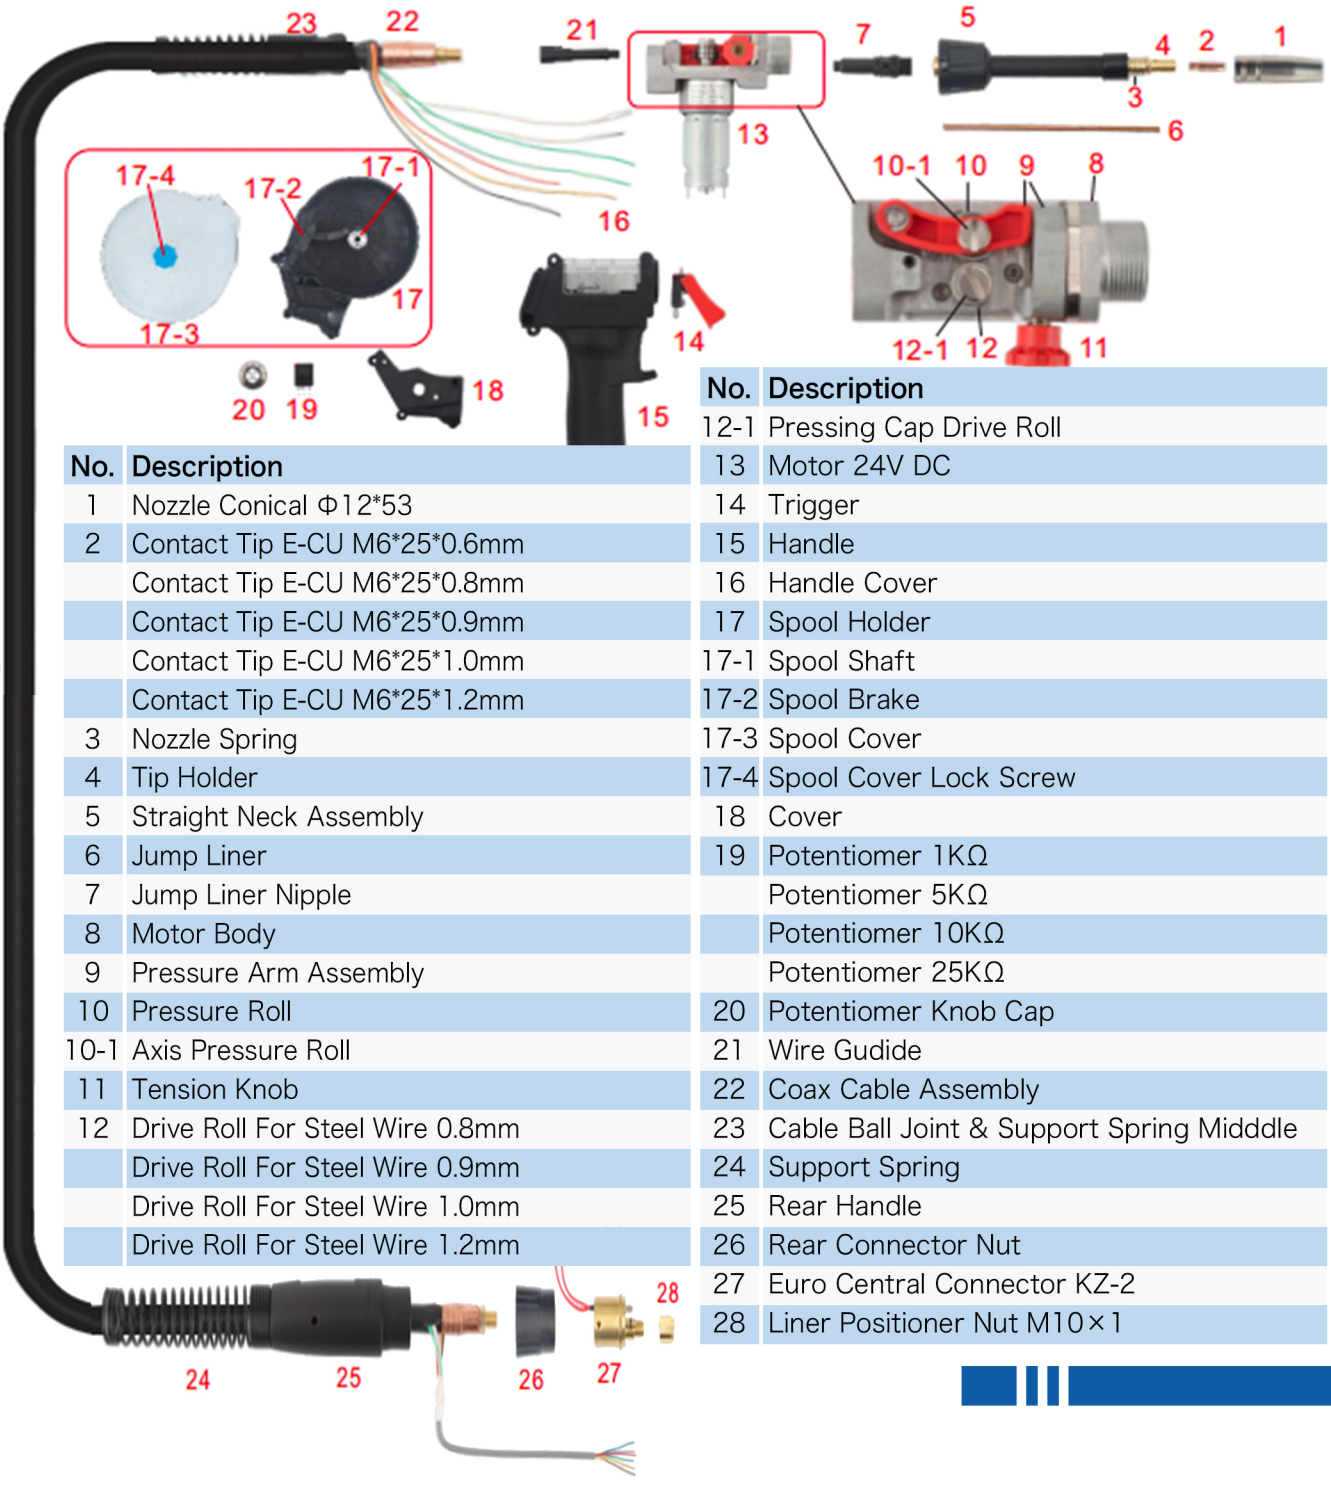

No.	Description
1	Nozzle Conical Φ12*53
2	Contact Tip E-CU M6*25*0.6mm
	Contact Tip E-CU M6*25*0.8mm
	Contact Tip E-CU M6*25*0.9mm
	Contact Tip E-CU M6*25*1.0mm
	Contact Tip E-CU M6*25*1.2mm
3	Nozzle Spring
4	Tip Holder
5	Straight Neck Assembly
6	Jump Liner
7	Jump Liner Nipple
8	Motor Body
9	Pressure Arm Assembly
10	Pressure Roll
10-1	Axis Pressure Roll
11	Tension Knob
12	Drive Roll For Steel Wire 0.8mm
	Drive Roll For Steel Wire 0.9mm
	Drive Roll For Steel Wire 1.0mm
	Drive Roll For Steel Wire 1.2mm

No.	Description
12-1	Pressing Cap Drive Roll
13	Motor 24V DC
14	Trigger
15	Handle
16	Handle Cover
17	Spool Holder
17-1	Spool Shaft
17-2	Spool Brake
17-3	Spool Cover
17-4	Spool Cover Lock Screw
18	Cover
19	Potentiomer 1KΩ
	Potentiomer 5KΩ
	Potentiomer 10KΩ
	Potentiomer 25KΩ
20	Potentiomer Knob Cap
21	Wire Gudide
22	Coax Cable Assembly
23	Cable Ball Joint & Support Spring Midddle
24	Support Spring
25	Rear Handle
26	Rear Connector Nut
27	Euro Central Connector KZ-2
28	Liner Positioner Nut M10×1




二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLSP24 SPOOL-ON MIG TORCH

技术参数 Technical Data

额定值 Rating	250A CO2/220A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.030"-.045"(0.8-1.2mm)(AL) .030"-.040"(0.8-1.0mm)(Steel)

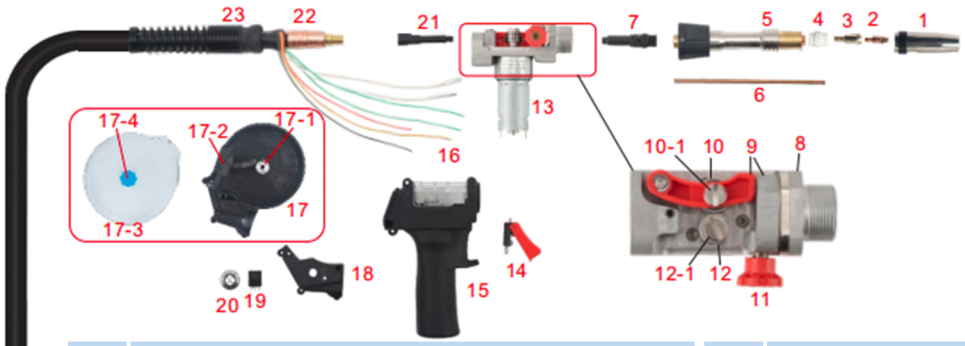

No.	Description
1	Nozzle Conical Φ12.5*63.5
2	Contact Tip E-CU M6*28*0.8mm
	Contact Tip E-CU M6*28*0.9mm
	Contact Tip E-CU M6*28*1.0mm
	Contact Tip E-CU M6*28*1.2mm
3	Tip Holder M6*26
4	Gas Diffuser DMC
5	Straight Neck Assembly
6	Jump Liner
7	Jump Liner Nipple
8	Motor Body
9	Pressure Arm Assembly
10	Pressure Roll
10-1	Axis Pressure Roll
11	Tension Knob
12	Drive Roll For Steel Wire 0.8mm
	Drive Roll For Steel Wire 0.9mm
	Drive Roll For Steel Wire 1.0mm
	Drive Roll For Steel Wire 1.2mm
12-1	Pressing Cap Drive Roll

No.	Description
13	Motor 24V DC
14	Trigger
15	Handle
16	Handle Cover
17	Spool Holder
17-1	Spool Shaft
17-2	Spool Brake
17-3	Spool Cover
17-4	Spool Cover Lock Screw
18	Cover
19	Potentiomer 1KΩ
	Potentiomer 5KΩ
	Potentiomer 10KΩ
	Potentiomer 25KΩ
20	Potentiomer Knob Cap
21	Wire Gudide
22	Coax Cable Assembly
23	Cable Ball Joint & Support Spring Midddle
24	Support Spring
25	Rear Handle
26	Rear Connector Nut
27	Euro Central Connector KZ-2
28	Liner Positioner Nut M10×1






二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

XLSP24 SPOOL-ON MIG TORCH

技术参数 Technical Data

额定值 Rating	230A CO2/200A Mixed Gases
暂载率 Duty cycle	60%
线径 Wire Size	.030"-.045"(0.8-1.2mm)(AL) .030"-.040"(0.8-1.0mm)(Steel)

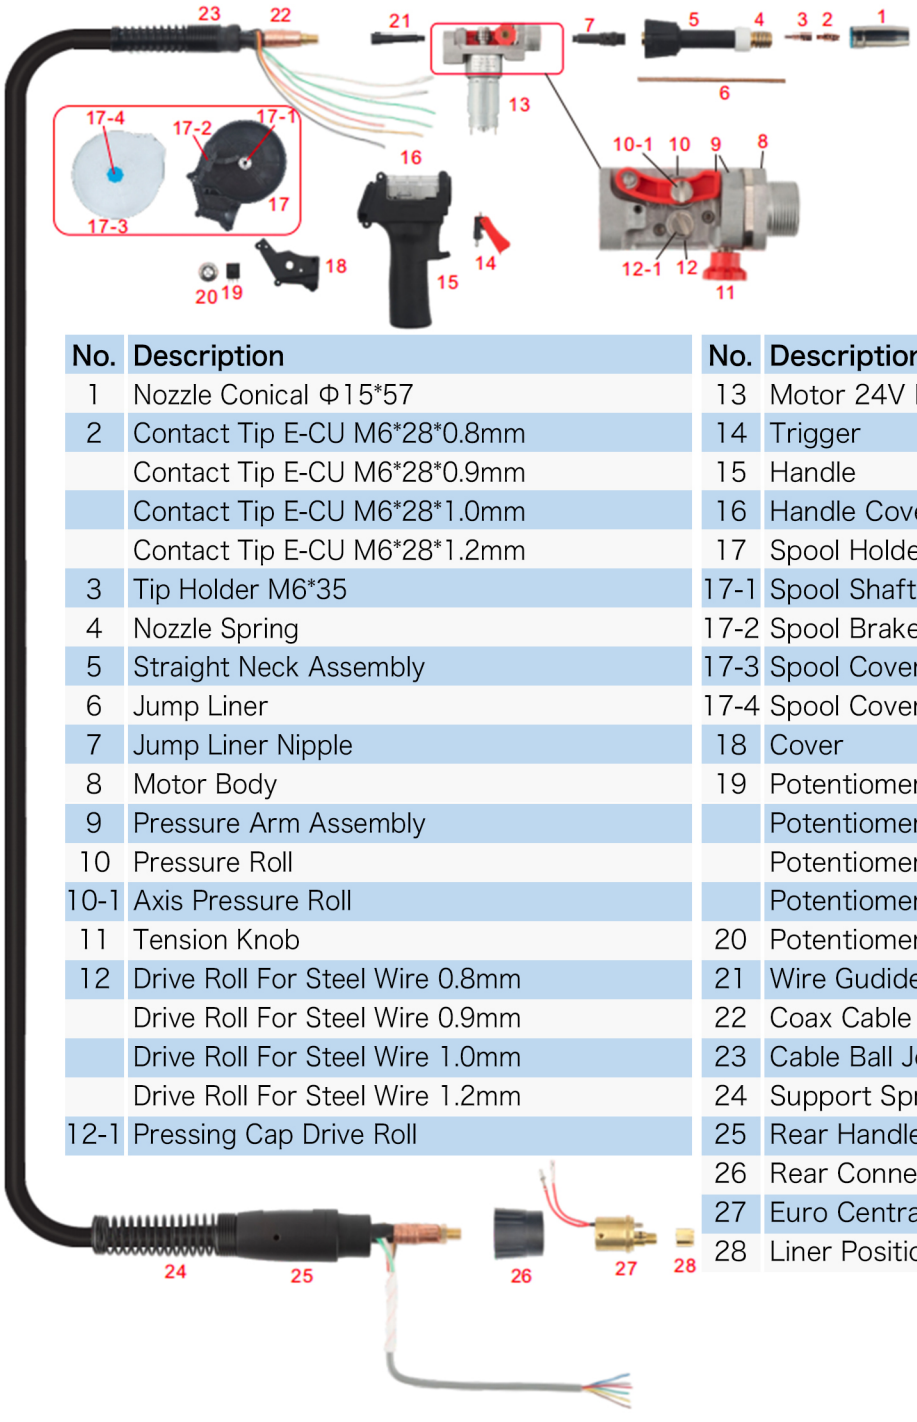

No.	Description	No.	Description
1	Nozzle Conical Φ15*57	13	Motor 24V DC
2	Contact Tip E-CU M6*28*0.8mm	14	Trigger
	Contact Tip E-CU M6*28*0.9mm	15	Handle
	Contact Tip E-CU M6*28*1.0mm	16	Handle Cover
	Contact Tip E-CU M6*28*1.2mm	17	Spool Holder
3	Tip Holder M6*35	17-1	Spool Shaft
4	Nozzle Spring	17-2	Spool Brake
5	Straight Neck Assembly	17-3	Spool Cover
6	Jump Liner	17-4	Spool Cover Lock Screw
7	Jump Liner Nipple	18	Cover
8	Motor Body	19	Potentiomer 1KΩ
9	Pressure Arm Assembly		Potentiomer 5KΩ
10	Pressure Roll		Potentiomer 10KΩ
10-1	Axis Pressure Roll		Potentiomer 25KΩ
11	Tension Knob	20	Potentiomer Knob Cap
12	Drive Roll For Steel Wire 0.8mm	21	Wire Gudide
	Drive Roll For Steel Wire 0.9mm	22	Coax Cable Assembly
	Drive Roll For Steel Wire 1.0mm	23	Cable Ball Joint & Support Spring Midddle
	Drive Roll For Steel Wire 1.2mm	24	Support Spring
12-1	Pressing Cap Drive Roll	25	Rear Handle
		26	Rear Connector Nut
		27	Euro Central Connector KZ-2
		28	Liner Positioner Nut M10×1

二氧化碳气保焊焊枪


CO_2 GAS SHIELDED WELDING TORCH



Technical Data	XLPP240	XLPP250	XLPP360	XLPPTW2	XLPPTW4
Cooling Method:	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
Rating: CO_2	250A	230A	300A	250A	300A
Rating: Mixed Gas	220A	200A	270A	220A	270A
Duty Cycle:	60%	60%	60%	60%	60%
Wire Size:	0.8-1.2mm	0.8-1.2mm	0.8-1.2mm	0.8-1.2mm	0.8-1.2mm
Motor Voltage	24V DC	24V DC	24V DC	24V DC	24V DC
Motor Life	3000Hours	3000Hours	3000Hours	3000Hours	3000Hours


二氧化碳气保焊焊枪

CO_2 GAS SHIELDED WELDING TORCH

 Order: XL501.0169 Descriotion: Euro Central Adaptor(Gas Radial)	 Order: XL501.0168HL Descriotion: Euro Central Adaptor(Hexagonal Long)	 Order: XL501.0168H Descriotion: Euro Central Adaptor(Hexagonal)	 Order: XL501.0168M Descriotion: Euro Central Adaptor(Mini)
 Order: XL501.0168 Descriotion: Euro Central Adaptor(Standard)	 Order: XL501.0168L Descriotion: Euro Central Adaptor(Long)	 Order: XL501.0168 Descriotion: Euro Central Adaptor(Kemppi)	 Order: XL501.0168N Descriotion: Euro Central Adaptor(New)
 Order: XL501.0168E Descriotion: Euro Central Adaptor(ESAB)	 Order: XLTWCA Descriotion: Tweco Central Adaptor	 Order: XLMLCA Descriotion: Miller Central Adaptor	 Order: XL129.0313 XL129.0357 XL129.0381 Capillary Tube For 1.8mm(Length=200mm) Capillary Tube For 1.6mm(Length=300mm) Capillary Tube For 1.8mm(Length=500mm)
 Order: XL501.2308 Descriotion: Insulating Flange 56mm Quadrangular	 Order: XL501.2308-80 Descriotion: Insulating Flange 80mm	 Order: XL501.0616 Descriotion: Insulating Flange 83mm	 XL501.0588 Descriotion: Insulating Flange 50mm
 Order: XLOTCEURO Descriotion: OTC Central Adaptor	 Order: XLPEUROL Descriotion: Panasonic Transform Euro Connection Adaptor	 Order: XLTWEURO Descriotion: Tweco Transform Euro Connection Adaptor	 Order: XLMILEURO Descriotion: Miller Transform Euro Connection Adaptor
 Order: XLLNCEURO Descriotion: Lincoln Transform Euro Connection Adaptor	 Order: XLFNSEURO Descriotion: Fronius F++Transform Euro Connection Adaptor	 Order: XL44.0350.3565 Descriotion: Fronius FSC Transform Euro Connection Adaptor	 Order: XLWWRS-5/XLWWRS-15 Descriotion: Welding Wire Reel Shaft 5kg/Welding Wire Reel Shaft 15kg

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

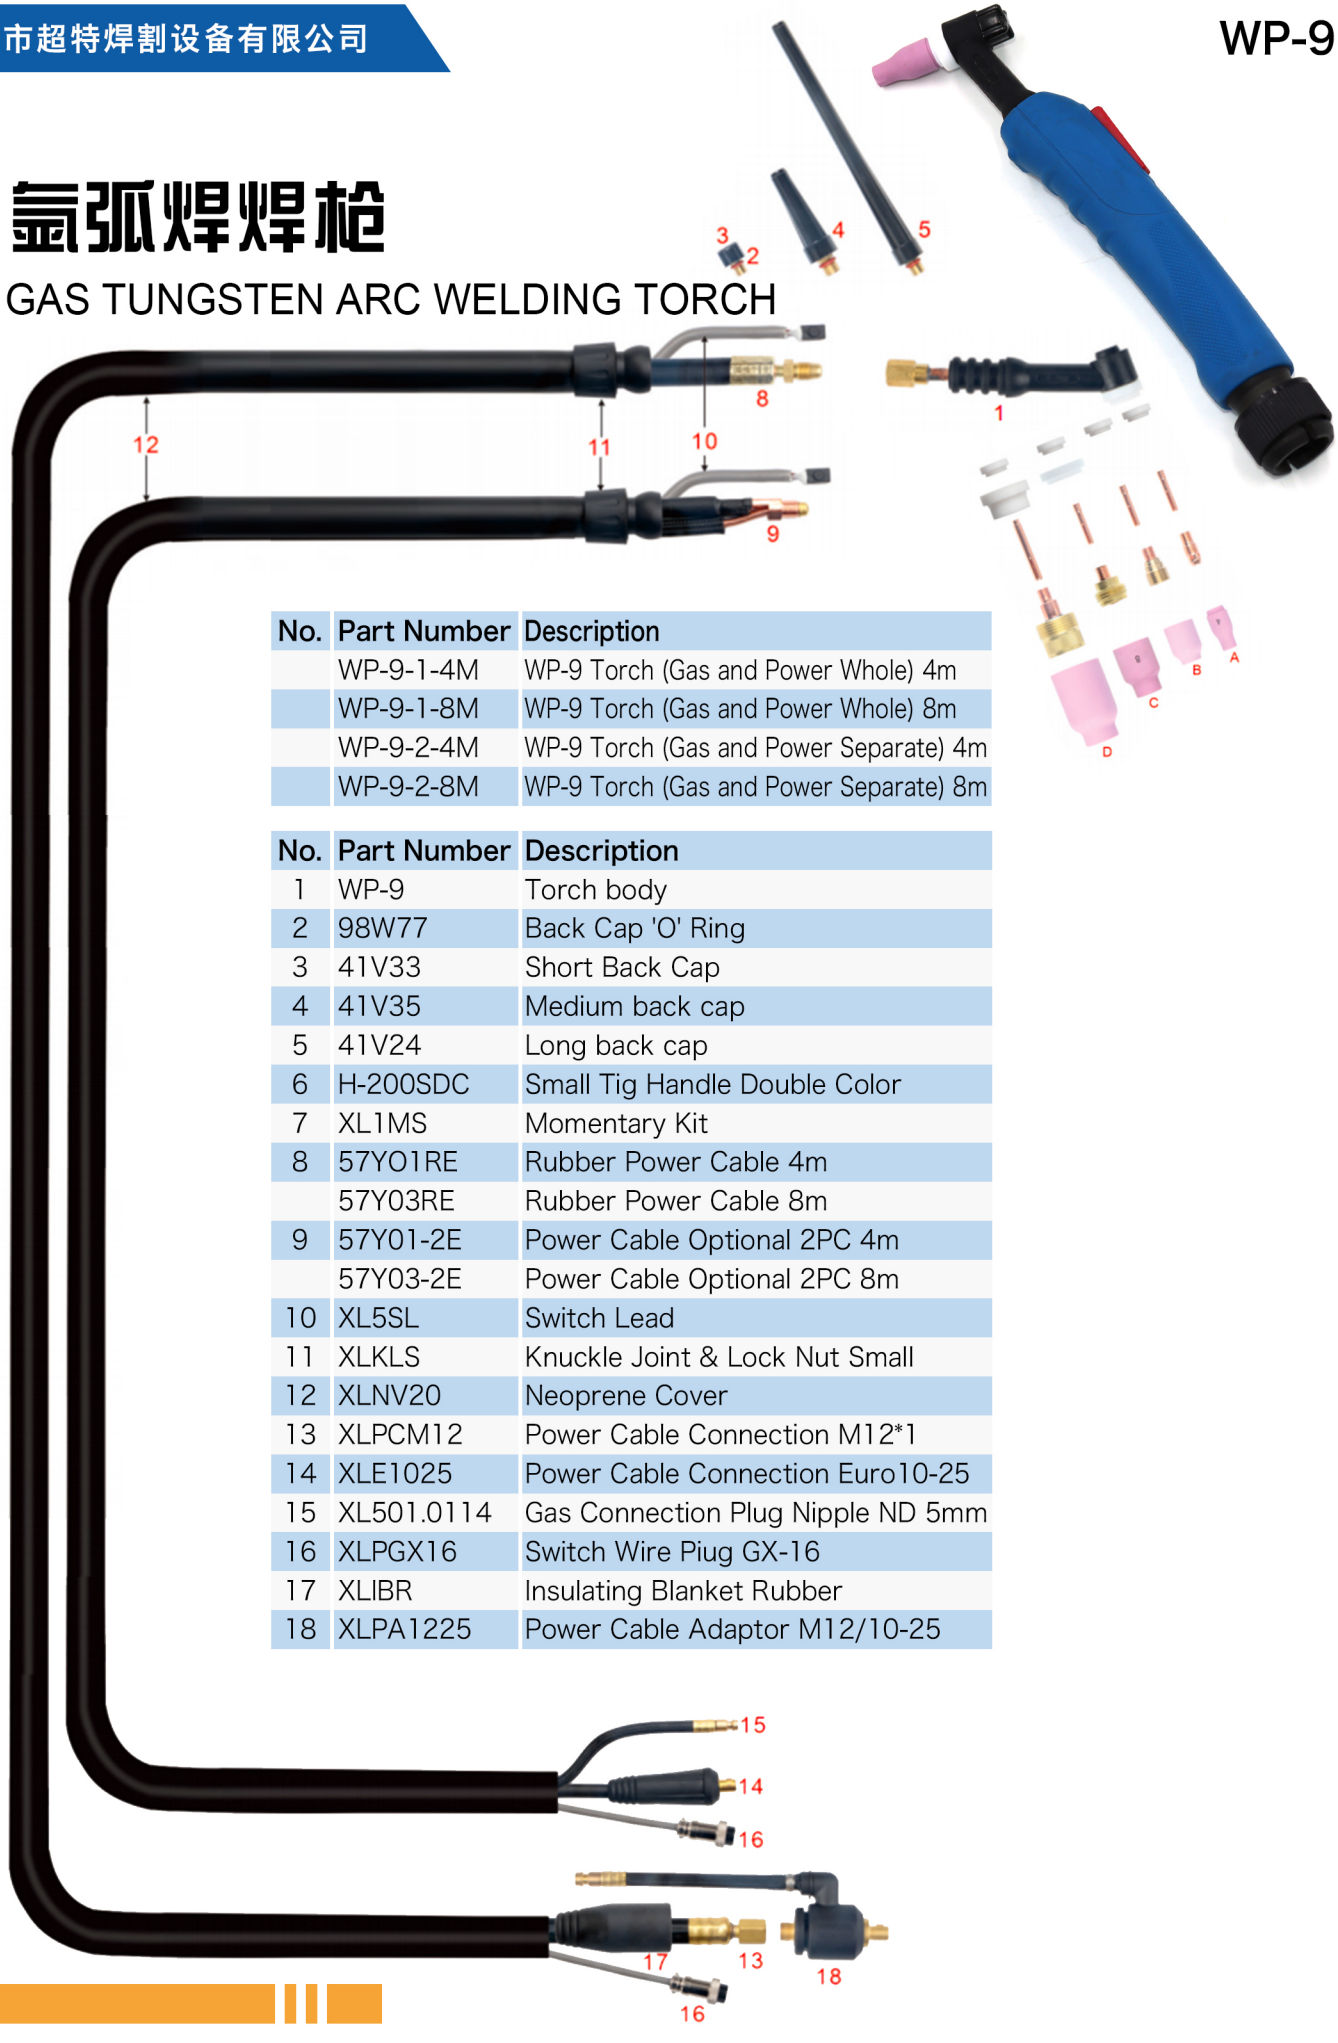


No.	Part Number	Description
	WP-9-1-4M	WP-9 Torch (Gas and Power Whole) 4m
	WP-9-1-8M	WP-9 Torch (Gas and Power Whole) 8m
	WP-9-2-4M	WP-9 Torch (Gas and Power Separate) 4m
	WP-9-2-8M	WP-9 Torch (Gas and Power Separate) 8m

No.	Part Number	Description
1	WP-9	Torch body
2	98W77	Back Cap 'O' Ring
3	41V33	Short Back Cap
4	41V35	Medium back cap
5	41V24	Long back cap
6	H-200SDC	Small Tig Handle Double Color
7	XL1MS	Momentary Kit
8	57YO1RE	Rubber Power Cable 4m
	57Y03RE	Rubber Power Cable 8m
9	57Y01-2E	Power Cable Optional 2PC 4m
	57Y03-2E	Power Cable Optional 2PC 8m
10	XL5SL	Switch Lead
11	XLKLS	Knuckle Joint & Lock Nut Small
12	XLNV20	Neoprene Cover
13	XLPCM12	Power Cable Connection M12*1
14	XLE1025	Power Cable Connection Euro10-25
15	XL501.0114	Gas Connection Plug Nipple ND 5mm
16	XLPGX16	Switch Wire Piug GX-16
17	XLIBR	Insulating Blanket Rubber
18	XLPA1225	Power Cable Adaptor M12/10-25

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

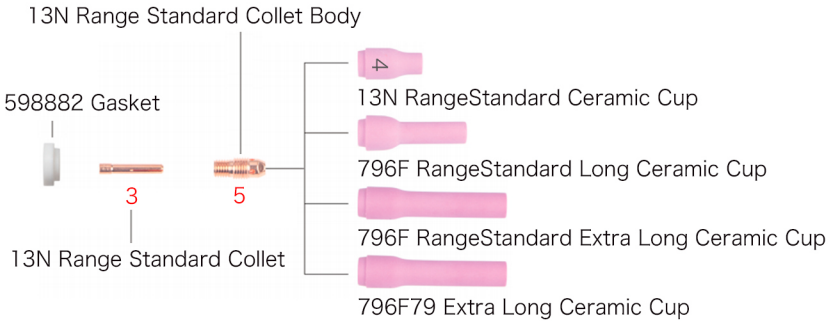



No.	Part No.	Description	Electrode(mm)	Size(inch)
1	WC-3-10	Cable Cover 3"x10' Nylon with Zipper		
	WC-3-22	Cable Cover 3"x22' Nylon with Zipper		
2	WC-3-10C	Cable Cover 3"x10' Canvas with Zipper		
	WC-3-22C	Cable Cover 3"x22' Canvas with Zipper		
3	13N20	Standard Collet	0.5	0.020
	13N21	Standard Collet	1.0	0.040
	13N22	Standard Collet	1.6	1/16
	13N22M	Standard Collet	2.0	5/64
	13N23	Standard Collet	2.4	3/32
	13N24	Standard Collet	3.2	1/8
4	13N20L	Large Diameter Gas Lens Collet	0.5	0.020
	13N21L	Large Diameter Gas Lens Collet	1.0	0.040
	13N22L	Large Diameter Gas Lens Collet	1.6	1/16
	13N22ML	Large Diameter Gas Lens Collet	2.0	5/64
	13N23L	Large Diameter Gas Lens Collet	2.4	3/32
	13N24L	Large Diameter Gas Lens Collet	3.2	1/8
5	13N25	Standard Collet Body	0.5	0.020
	13N26	Standard Collet Body	1.0	0.040
	13N27	Standard Collet Body	1.6	1/16
	13N27M	Standard Collet Body	2.0	5/64
	13N28	Standard Collet Body	2.4	3/32
	13N29	Standard Collet Body	3.2	1/8
6	45V41	Gas Lens Body	0.5	0.020
	45V42	Gas Lens Body	1.0	0.040
	45V43	Gas Lens Body	1.6	1/16
	45V43M	Gas Lens Body	2.0	5/64
	45V44	Gas Lens Body	2.4	3/32
	45V45	Gas Lens Body	3.2	1/8
7	45V35SW	Stubby Medium Gas Lens Body	1.6	1/16
	45V36SW	Stubby Medium Gas Lens Body	2.4	3/32
	45V37SW	Stubby Medium Gas Lens Body	3.2	1/8
	45V38SW	Stubby Medium Gas Lens Body	4.0	5/32

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH





① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

No.	Part No.	Description	Size	BoreA MM	BoreA INCH
1	13N08	Standard Ceramic Cup	4	6	1/4
	13N09	Standard Ceramic Cup	5	8	5/16
	13N10	Standard Ceramic Cup	6	9.5	3/8
	13N11	Standard Ceramic Cup	7	11	7/16
	13N12	Standard Ceramic Cup	8	12.5	1/2
	13N13	Standard Ceramic Cup	10	16	5/8
2	796F70	Standard Long Ceramic Cup	3	5	3/16
	796F71	Standard Long Ceramic Cup	4	6	1/4
	796F72	Standard Long Ceramic Cup	5	8	5/16
	796F73	Standard Long Ceramic Cup	6	9.5	3/8
3	796F74	Standard Extra Long Ceramic Cup	3	5	3/16
	796F75	Standard Extra Long Ceramic Cup	4	6	1/4
	796F76	Standard Extra Long Ceramic Cup	5	8	5/16
	796F77	Standard Extra Long Ceramic Cup	6	9.5	3/8
4	796F79	Extra Long Ceramic Cup	4	6	1/4
5	53N61MS	Short Gas Lens Ceramic Cup		10.4	
6	53N58	Gas Lens Ceramic Cup	4	7	1/4
	53N59	Gas Lens Ceramic Cup	5	8	5/16
	53N60	Gas Lens Ceramic Cup	6	9.5	3/8
	53N61	Gas Lens Ceramic Cup	7	11	7/16
	53N61S	Gas Lens Ceramic Cup	8	12.5	1/2
7	53N58L	Gas Lens Long Ceramic Cup	4	6	1/4
	53N59L	Gas Lens Long Ceramic Cup	5	8	5/16
	53N60L	Gas Lens Long Ceramic Cup	6	9.5	3/8
	53N61L	Gas Lens Long Ceramic Cup	7	11	7/16
	53N61SL	Gas Lens Long Ceramic Cup	8	12.5	1/2
8	53N58ML	Gas Lens Medium LongjCeramic Cup	4	6	1/4
	53N59ML	Gas Lens Medium LongjCeramic Cup	5	8	5/16
	53N60ML	Gas Lens Medium LongjCeramic Cup	6	9.5	3/8
	53N61ML	Gas Lens Medium LongjCeramic Cup	7	11	7/16
	53N61SML	Gas Lens Medium LongjCeramic Cup	8	12.5	1/2
9	53N58XL	Gas Lens Extra Long Ceramic Cup	4	6	1/4
	53N59XL	Gas Lens Extra Long Ceramic Cup	5	8	5/16
	53N60XL	Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	53N61XL	Gas Lens Extra Long Ceramic Cup	7	11	7/16
	53N61SXL	Gas Lens Extra Long Ceramic Cup	8	12.5	1/2

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

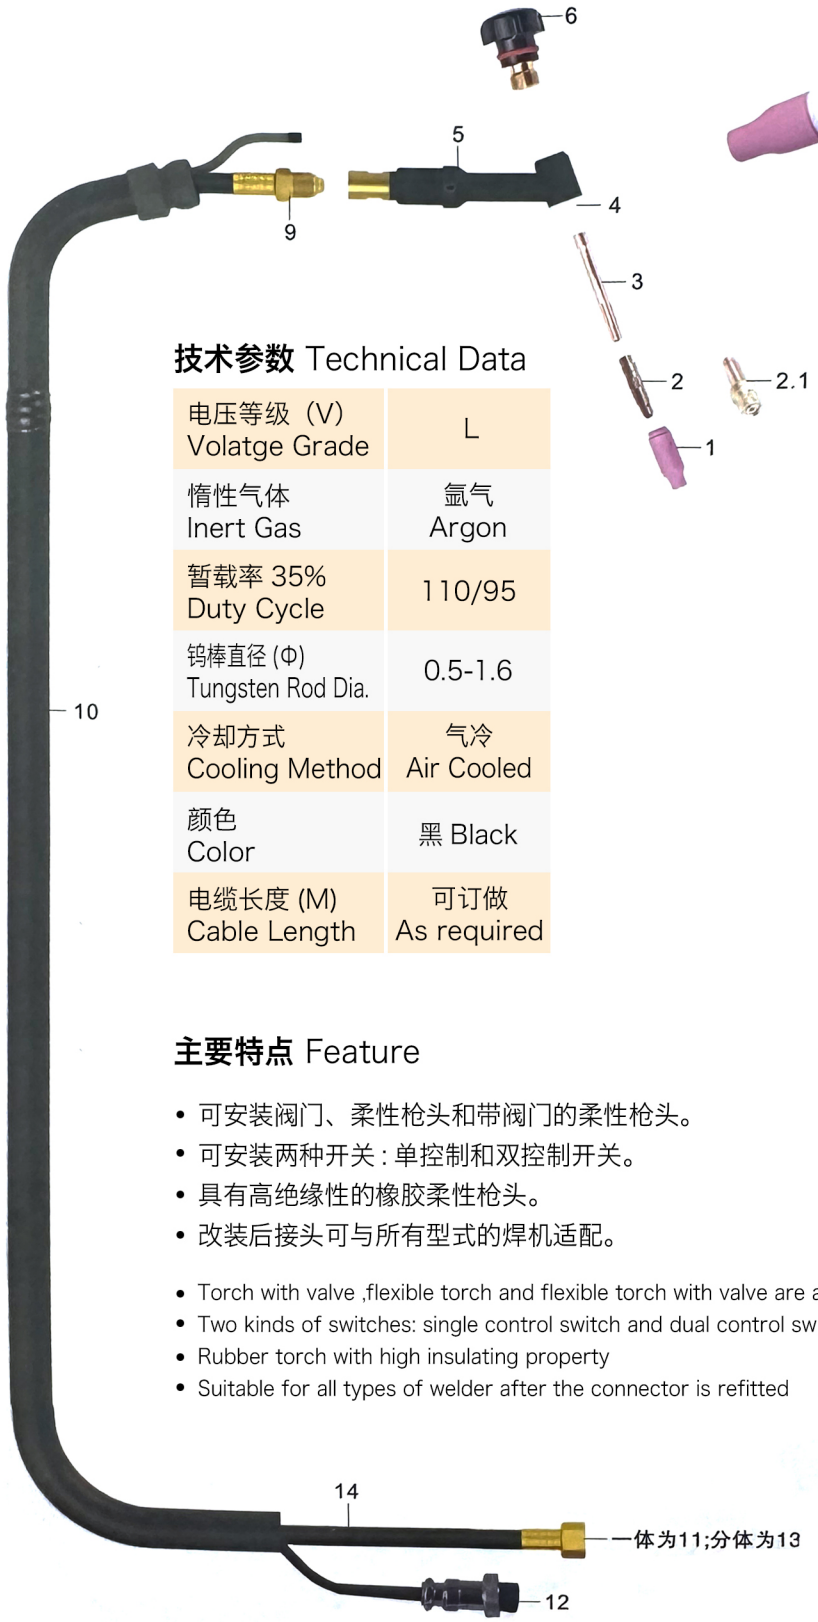

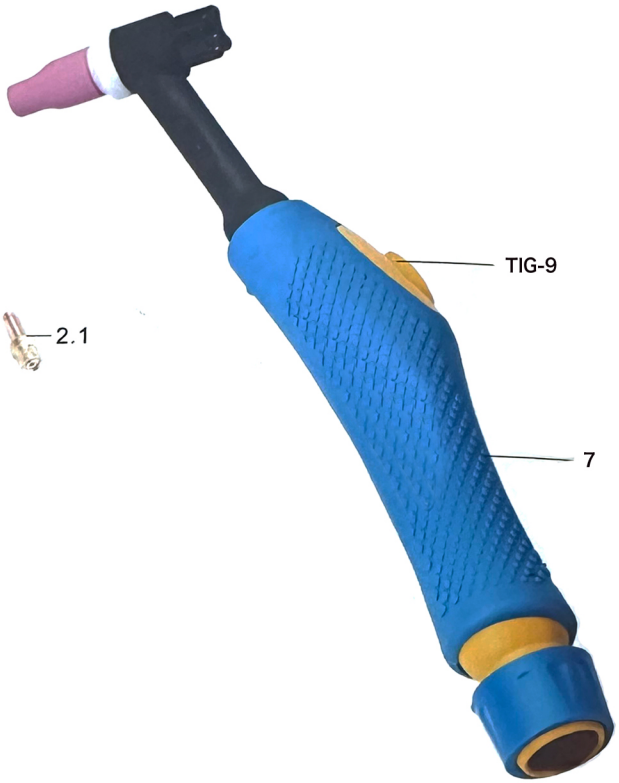



技术参数 Technical Data

电压等级（V） Volatge Grade	L
惰性气体 Inert Gas	氩气 Argon
暂载率 35% Duty Cycle	110/95
钨棒直径 (Φ) Tungsten Rod Dia.	0.5-1.6
冷却方式 Cooling Method	气冷 Air Cooled
颜色 Color	黑 Black
电缆长度 (M) Cable Length	可订做 As required

主要特点 Feature

- 可安装阀门、柔性枪头和带阀门的柔性枪头。
- 可安装两种开关：单控制和双控制开关。
- 具有高绝缘性的橡胶柔性枪头。
- 改装后接头可与所有型式的焊机适配。

- Torch with valve ,flexible torch and flexible torch with valve are available
- Two kinds of switches: single control switch and dual control switch
- Rubber torch with high insulating property
- Suitable for all types of welder after the connector is refitted

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

TIG 焊枪 硅橡胶系列 WP-9（技术参数 Technical Data）

额定电流（A)Rated Current	负载持续率（%）Duty Cycle	氩气：流量（1/min）Argon：Gas Flow	冷却方式（Cooling Method）
110	35	7（±5%）	气冷（Air Cooled）

图文代号 NO.		名称 Article	规格 Description
	1	喷嘴 Ceramin Nozzle	4#13N08=6.5*30 5#13N09=8.0*30 6#13N10=9.5*30 7#13N11=11*30 8#13N12=12.5*30 10#13N13
			53N58=6.5*25.5 53N59=8.0*25.5 53N60=9.5*25.5 53N61=11*25.5 53N61S=12.5*25.5
	2	导流件 Collet Body	13N25=0.5*3/8*24 13N26=1.0*3/8*24 13N27=1.6*3/8*24 13N28=2.4*3/8*24 13N29=3.2*3/8*24
	2.1	网状导流件 Gras Lens Body	45V41 Φ0.5 45V42 Φ1.0 45V43 Φ1.6 45V44 Φ2.4 45V45 Φ3.2
	3	夹头 Collet	13N20=0.5*25 13N21=1.0*25 13N22=1 6*25 13N23=2.4*25 13N24=3.2*25
	4	下盖 Insulator	CG0001 598882
	5	主体 Torch Body	WP-9
			WP-9V
			WP-9FV
			WP-9F


图文代号 NO.		名称 Article	规格 Description
	6	长帽 Long Back Cap	BC0063 41V24
		短帽 Short Back Cap	BC0065 41V33
	7	手柄套 Tubular Handle	H0005
		TIG 手柄套（橙色）TIG Orange Handle	H007-1
		TIG 手柄套（蓝色）TIG Blue Handle	H007-2
		TIG 手柄套（绿色）TIG Green Handle	H007-3
		TIG 手柄套（黑色）TIG Black Handle	H007-4
	8	微动开关 Micro Switch	东海开关 DongHai Switch
			红旗开关 HongQi Switch
	9	上接头 Top Connector	分体 Separate
			一体 Whole
	10	上接头 Top Connector	帆布布套 Canvas Cover
			橡塑护套 Rubber Cover
			高级波纹护套 Senior corrugated Cover
	11	气管下接头（分体）Gas Nut (Separate)	M16*1.5
			M10*1
			M12*1
			G5/8-18
		气电分体转一体 Saparated Power& Gas to Whole	M16*1.5

图文代号 NO.		名称 Article	规格 Description
	12	航空插 Switch Connector	普通二芯航空插 General 2 Pins Plug
			二芯航空插 2 Pins Plug
			松下航空插 Panasonic Plug
	13 主电缆接头（Connector for Cable）	板式转换接头 Plate-type Connector	
		线鼻子 Lug	150A
		欧式接头 Water Con-version Plug	10-25# 35-50# 70-95#
		快插接头 Cable Plug	10-25 35-50 50-70 70-95 16# 35# 50# 70# 95#
		十字气开关 Cross Gas Switch	
		螺母接头 Nut	M16*1.5
		外螺纹接头 Nut(Extern-al Thread)	G7/8-14
	14 主电缆管（Cable Tube）	白优管 Woven Tube	
		耐高温管 High Temp-erature Resistant Tube	
	15 气管（Gas Hose）	橡塑管 Rubber Hose	5*8 黑色 Black



氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

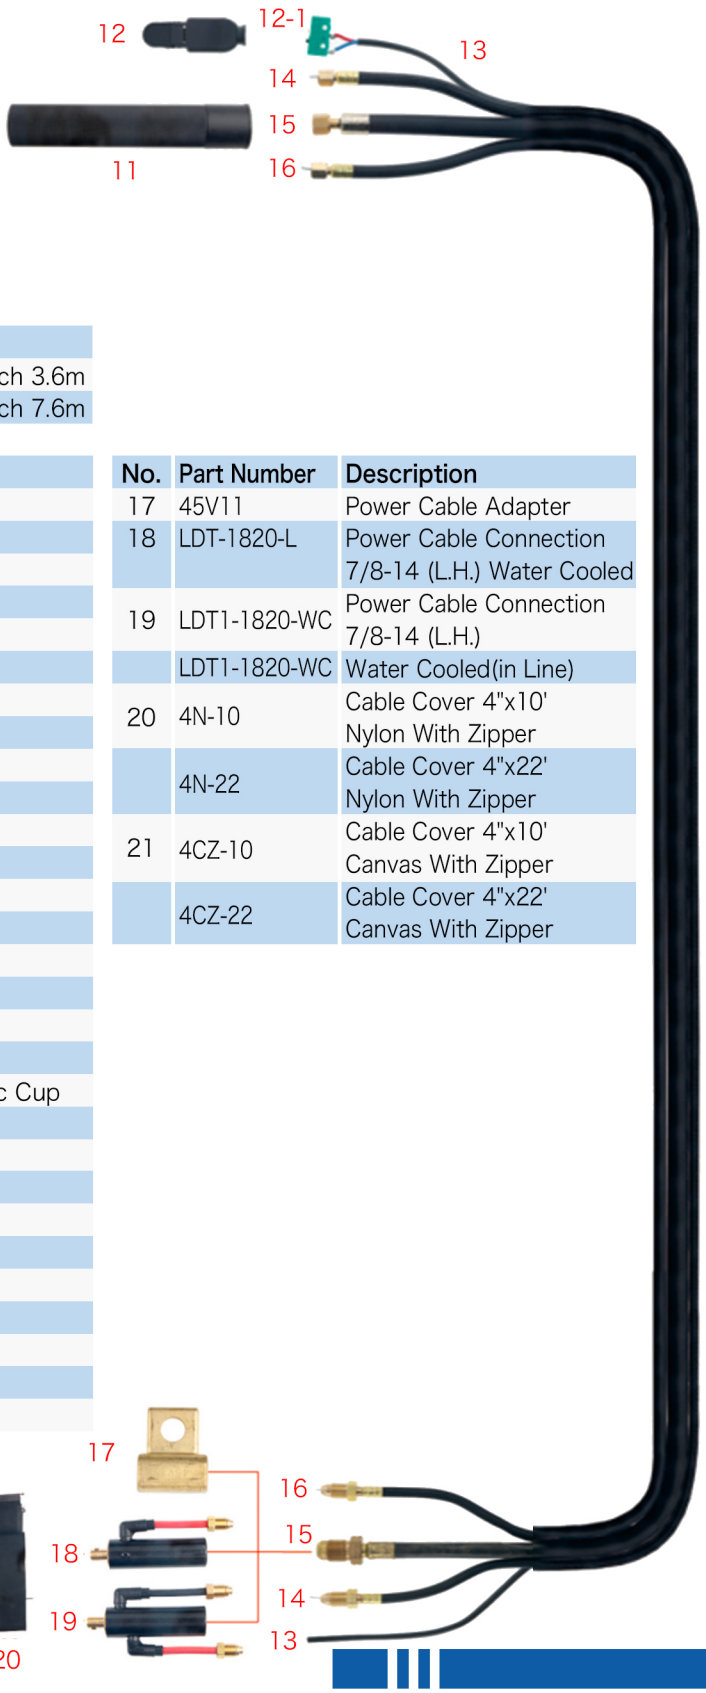

No.	Part Number	Description
	WP12-12	WP-12 Water-Cooled Welding Torch 3.6m
	WP12-25	WP-12 Water-Cooled Welding Torch 7.6m

No.	Part Number	Description
1	WP12	Torch Body
2	12NG	Standard Gasket
3	56Y45	Short Back Cap
4	56Y44	Long back Cap
5	85Z14	Collet-1.6mm
	85Z15	Collet-2.4mm
	85Z16	Collet-3.2mm
	85Z17	Collet-4.0mm
	85Z18	Collet-4.8mm
	85Z19	Collet-6.4mm
6	11WP65	Standard Collet Body
7	14N** Range	Standard Gas Ceramic Cup
8	12GLG	Gas Lens Gasket
9	11GL16	Gas Lens Body-1.6 mm
	11GL18	Gas Lens Body-3.2 mm
	11GL32	Gas Lens Body-2.4 mm
	11GL53	Gas Lens Body-4.0 mm
	11GL36	Gas Lens Body-4.8 mm
10	57N** Range	Large Diameter Gas Lens Ceramic Cup
11	85WP13	Handle
12	SW-R	Switch Shell
12-1	KW4-3Z-3	Switch KW
13	XL2SL	2 Core Control Wire
14	40V84R	Rubber Power Cable 12.5'
	40V84RL	Rubber Power Cable 25'
15	40V83R	Rubber Water Hose 12.5'
	40V83RL	Rubber Water Hose 25'
16	40V82R	Rubber Gas Hose 12.5'
	40V82RL	Rubber Gas Hose 25'

No.	Part Number	Description
17	45V11	Power Cable Adapter
18	LDT-1820-L	Power Cable Connection 7/8-14 (L.H.) Water Cooled
19	LDT1-1820-WC	Power Cable Connection 7/8-14 (L.H.)
	LDT1-1820-WC	Water Cooled(in Line)
20	4N-10	Cable Cover 4"x10' Nylon With Zipper
	4N-22	Cable Cover 4"x22' Nylon With Zipper
21	4CZ-10	Cable Cover 4"x10' Canvas With Zipper
	4CZ-22	Cable Cover 4"x22' Canvas With Zipper

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



No.	Part No.	Description	Size	BoreA(mm)	BoreA(inch)
1	14N57	Standard Ceramic Cup	4	6	1/4
	14N58	Standard Ceramic Cup	5	8	5/16
	14N59	Standard Ceramic Cup	6	9.5	3/8
	14N60	Standard Ceramic Cup	7	11	7/16
	14N61	Standard Ceramic Cup	8	12.5	1/2
	14N61-10	Standard Ceramic Cup	10	16	5/8
	14N61-12	Standard Ceramic Cup	12	19	3/4
2	14N68L	Long Ceramic Cup	4	6	1/4
	14N69L	Long Ceramic Cup	5	8	5/16
	14N70L	Long Ceramic Cup	6	9.5	3/8
	14N71L	Long Ceramic Cup	7	11	7/16
	14N72L	Long Ceramic Cup	8	12.5	1/2

No.	Part No.	Description	Electrode(mm)	Size(inch)
3	85Z14	Standard Collet	1.6	1/16
	85Z15	Standard Collet	2.4	3/32
	85Z16	Standard Collet	3.2	1/8
	85Z17	Standard Collet	4.0	5/32
	85Z18	Standard Collet	4.8	3/16
	85Z19	Standard Collet	6.4	1/4
4	11WP65	Standard Collet Body	6.6	
5	11GL16	Gas Lens Body	1.6	1/16
	11GL32	Gas Lens Body	2.4	3/32
	11GL18	Gas Lens Body	3.2	1/8
	11GL53	Gas Lens Body	4.0	5/32
	11GL36	Gas Lens Body	4.8	3/16



导流件 Collet Body | 夹头 Collet | 下盖 Insulator | 主体 Torch Body | 长帽 Long Back Cap | 短帽 Short Back Cap | 手柄套 Tubular Handle

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH





技术参数 Technical Data

电压等级（V） Volatge Grade	L
惰性气体 Inert Gas	氩气 Argon
暂载率 35% Duty Cycle	320/270
钨棒直径 (Φ) Tungsten Rod Dia.	0.5-4.0
冷却方式 Cooling Method	水冷 Water Cooled
冷却水最高温度 Cooling Water Max Temperature	60℃
最小水流迪度 Min Water Flow	L/min 1.5
最大空气压力 Max Air Pressure	bar 4
最小空气压力 Min Air Pressure	bar 2
气流量 Gas Flow	L/min 7-20

主要特点 Feature

- 可安装阀门、柔性枪头和带阀门的柔性枪头。
- 可安装两种开关：单控制和双控制开关。
- 具有高绝缘性的橡胶柔性枪头。
- 改装后接头可与所有型式的焊机适配。
- Torch with valve ,flexible torch and flexible torch with valve are available
- Two kinds of switches: single control 1switch and dual control switch
- Rubber torch with high insulating property
- Suitable for all types of welder after the connector is refitted


WSME-3



氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

No.	Part Number	Description
	WP-17-1-4M	WP-17 Torch (Gas and Power Whole) 4m
	WP-17-1-8M	WP-17 Torch (Gas and Power Whole) 8m
	WP-17-2-4M	WP-17 Torch (Gas and Power Separate) 4m
	WP-17-2-8M	WP-17 Torch (Gas and Power Separate) 8m
1	WP-17	Torch body
2	98W18	Back Cap 'O' Ring
3	57Y04	Short Back Cap
4	57Y05	Medium back cap
5	57Y02	Long back cap
6	H-200SDC	Small Tig Handle Double Color
7	XL1MS	Momentary Kit
8	57Y01RE	Rubber Power Cable 4m
	57Y03RE	Rubber Power Cable 8m
9	57Y01-2E	Power Cable Optional 2PC 4m
	57Y03-2E	Power Cable Optional 2PC 8m
10	XL5SL	Switch Lead
11	XLKLS	Knuckle Joint & Lock Nut Small
12	XLNV20	Neoprene Cover
13	XLPCM12	Power Cable Connection M12*1
14	XLE1025	Power Cable Connection Euro10-25
15	XL501.0114	Gas Connection Plug Nipple ND 5mm
16	XLPGX16	Switch Wire Plug GX-16
17	XLIBR	Insulating Blanket Rubber
18	XLPA1225	Power Cable Adaptor M12/10-25


No.	Part Number
A	Standard Series
B	Stubby Series
C	Stubby Gas Lens Series
D	Gas Lens Series
E	Large Gas Lens Series

技术参数 Technical Data

- Air-Cooled Tig Welding Torch
- Rating:150A DC/115A AC @ 60% Duty Cycle
- .020"-1/8"/0.5-3.2mm Electrodes

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

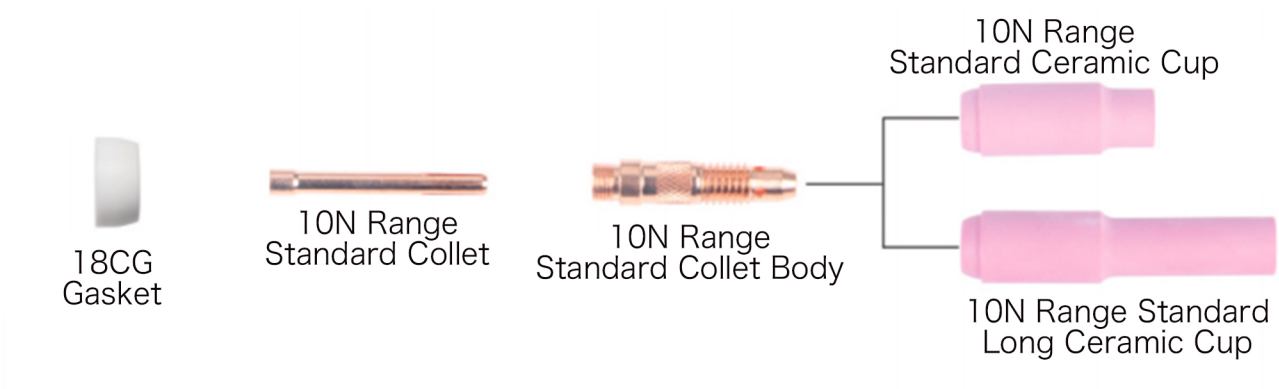



1 2 3

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	10N21	Standard Collet	0.5	0.020
	10N22	Standard Collet	1.0	0.040
	10N23	Standard Collet	1.6	1/16
	10N23M	Standard Collet	2.0	5/64
	10N24	Standard Collet	2.4	3/32
	10N25	Standard Collet	3.2	1/8
	10N20	Standard Collet	4.0	5/32
2	10N21S	Stubby Collet	0.5	0.020
	10N22S	Stubby Collet	1.0	0.040
	10N23S	Stubby Collet	1.6	1/16
	10N23MS	Stubby Collet	2.0	5/64
	10N24S	Stubby Collet	2.4	3/32
	10N25S	Stubby Collet	3.2	1/8
3	17CB20	Stubby Collet Body	3.5	

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH




1




2



3



4



5

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	10N29	Standard Collet Body	0.5	0.020
	10N30	Standard Collet Body	1.0	0.040
	10N31	Standard Collet Body	1.6	1/16
	10N31M	Standard Collet Body	2.0	5/64
	10N32	Standard Collet Body	2.4	3/32
	10N28	Standard Collet Body	3.2	1/8
	406488	Standard Collet Body	4.0	5/32
2	17GL040	Stubby Gas Lens Body	1.0	0.040
	17GL116	Stubby Gas Lens Body	1.6	1/16
	17GL564	Stubby Gas Lens Body	2.0	5/64
	17GL332	Stubby Gas Lens Body	2.4	3/32
	17GL18	Stubby Gas Lens Body	3.2	1/8
3	45V29S	Stubby Medium Gasens BodV	0.5	0.020
	45V24S	Stubby Medium Gasens BodV	1.0	0.040
	45V25S	Stubby Medium Gasens BodV	1.6	1/16
	45V25MS	Stubby Medium Gasens BodV	2.0	5/64
	45V26S	Stubby Medium Gasens BodV	2.4	3/32
	45V27S	Stubby Medium Gasens BodV	3.2	1/8
4	45V29	Gas Lens Body	0.5	0.020
	45V24	Gas Lens Body	1.0	0.040
	45V25	Gas Lens Body	1.6	1/16
	45V25M	Gas Lens Body	2.0	5/64
	45V26	Gas Lens Body	2.4	3/32
	45V27	Gas Lens Body	3.2	1/8
	45V28	Gas Lens Body	4.0	5/32
5	45V0204	Large Diameter Gas Lens Body	1.0	0.040
	45V116	Large Diameter Gas Lens Body	1.6	1/16
	45V116M	Large Diameter Gas Lens Body	2.0	5/64
	45V64	Large Diameter Gas Lens Body	2.4	3/32
	995795	Large Diameter Gas Lens Body	3.2	1/8
	45V63	Large Diameter Gas Lens Body	4.0	5/32

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



1 2 3 4 5 6

No.	Part No.	Description	Size	BoreA MM	BoreA INCH
1	53N58L	Gas Lens Long Ceramic Cup	4	6	1/4
	53N59L	Gas Lens Long Ceramic Cup	5	8	5/16
	53N60L	Gas Lens Long Ceramic Cup	6	9.5	3/8
	53N61L	Gas Lens Long Ceramic Cup	7	11	7/16
	53N61SL	Gas Lens Long Ceramic Cup	8	12.5	1/2
2	53N58ML	Gas Lens Medium Long Ceramic Cup	4	6	1/4
	53N59ML	Gas Lens Medium Long Ceramic Cup	5	8	5/16
	53N60ML	Gas Lens Medium Long Ceramic Cup	6	9.5	3/8
	53N61ML	Gas Lens Medium Long Ceramic Cup	7	11	7/16
	53N61SM	Gas Lens Medium Long Ceramic Cup	8	12.5	1/2
3	53N58XL	Gas Lens Extra Long Ceramic Cup	4	6	1/4
	53N59XL	Gas Lens Extra Long Ceramic Cup	5	8	5/16
	53N60XL	Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	53N61XL	Gas Lens Extra Long Ceramic Cup	7	11	7/16
	53N61SXL	Gas Lens Extra Long Ceramic Cup	8	12.5	1/2
4	10N50	Standard Ceramic Cup	4	6	1/4
	10N49	Standard Ceramic Cup	5	8	5/16
	10N48	Standard Ceramic Cup	6	9.5	3/8
	10N47	Standard Ceramic Cup	7	11	7/16
	10N46	Standard Ceramic Cup	8	12.5	1/2
	10N45	Standard Ceramic Cup	10	16	5/8
	10N44	Standard Ceramic Cup	12	19	3/4
5	105Z43	Conicity Ceramic Cup	4	6	1/4
	105Z42	Conicity Ceramic Cup	5	8	5/16
	105Z44	Conicity Ceramic Cup	6	9.5	3/8
	105Z45	Conicity Ceramic Cup	7	11	7/16
6	10N50L	Standard Long Ceramic Cup	4	6	1/4
	10N49L	Standard Long Ceramic Cup	5	8	5/16
	10N48L	Standard Long Ceramic Cup	6	9.5	3/8
	10N47L	Standard Long Ceramic Cup	7	11	7/16
	10N46L	Standard Long Ceramic Cup	8	12.5	1/2
7	53N58	Gas Lens Ceramic Cup	4	6	1/4
	53N59	Gas Lens Ceramic Cup	5	8	5/16
	53N60	Gas Lens Ceramic Cup	6	9.5	3/8
	53N61	Gas Lens Ceramic Cup	7	11	7/16
	53N61S	Gas Lens Ceramic Cup	8	12.5	1/2

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH




1 2 3 4 5 6 7

No.	Part No.	Description	Size	BoreA MM	BoreA INCH
1	54N16SW	Medium Gas Lens Ceramic Cup	6	9.5	3/8
	54N15SW	Medium Gas Lens Ceramic Cup	7	11	7/16
	54N14SW	Medium Gas Lens Ceramic Cup	8	12.5	1/2
	54N12SW	Medium Gas Lens Ceramic Cup	10	16	5/8
2	54N18	Gas Lens Ceramic Cup	4	6	1/4
	54N17	Gas Lens Ceramic Cup	5	8	5/16
	54N16	Gas Lens Ceramic Cup	6	9.5	3/8
	54N15	Gas Lens Ceramic Cup	7	11	7/16
	54N14	Gas Lens Ceramic Cup	8	12.5	1/2
	54N19	Gas Lens Ceramic Cup	12	19	3/4
3	54N18L	Long Gas Lens Ceramic Cup	4	6	1/4
	54N17L	Long Gas Lens Ceramic Cup	5	8	5/16
	54N16L	Long Gas Lens Ceramic Cup	6	9.5	3/8
	54N15L	Long Gas Lens Ceramic Cup	7	11	7/16
	54N14L	Long Gas Lens Ceramic Cup	8	12.5	1/2
4	53N89	Large Diameter Gas Lens CeramicCup	15	24	15/16
5	57N75	Large Diameter Gas Lens Ceramic Cup	6	9.5	3/8
	57N74	Large Diameter Gas Lens Ceramic Cup	8	12.5	1/2
	53N88	Large Diameter Gas Lens Ceramic Cup	10	16	5/8
	53N87	Large Diameter Gas Lens Ceramic Cup	12	19	3/4
6	57N75L	Large Diameler Gas Lens Long Ceramic Cup	6	9.5	3/8
	57N74L	Large Diameler Gas Lens Long Ceramic Cup	8	12.5	1/2
	53N88L	Large Diameler Gas Lens Long Ceramic Cup	10	16	5/8
	53N87L	Large Diameler Gas Lens Long Ceramic Cup	12	19	3/4
7	57N75XL	Large Diameter Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	57N74XL	Large Diameter Gas Lens Extra Long Ceramic Cup	8	12.5	1/2
	53N88XL	Large Diameter Gas Lens Extra Long Ceramic Cup	10	16	5/8
	53N87XL	Large Diameter Gas Lens Extra Long Ceramic Cup	12	19	3/4

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



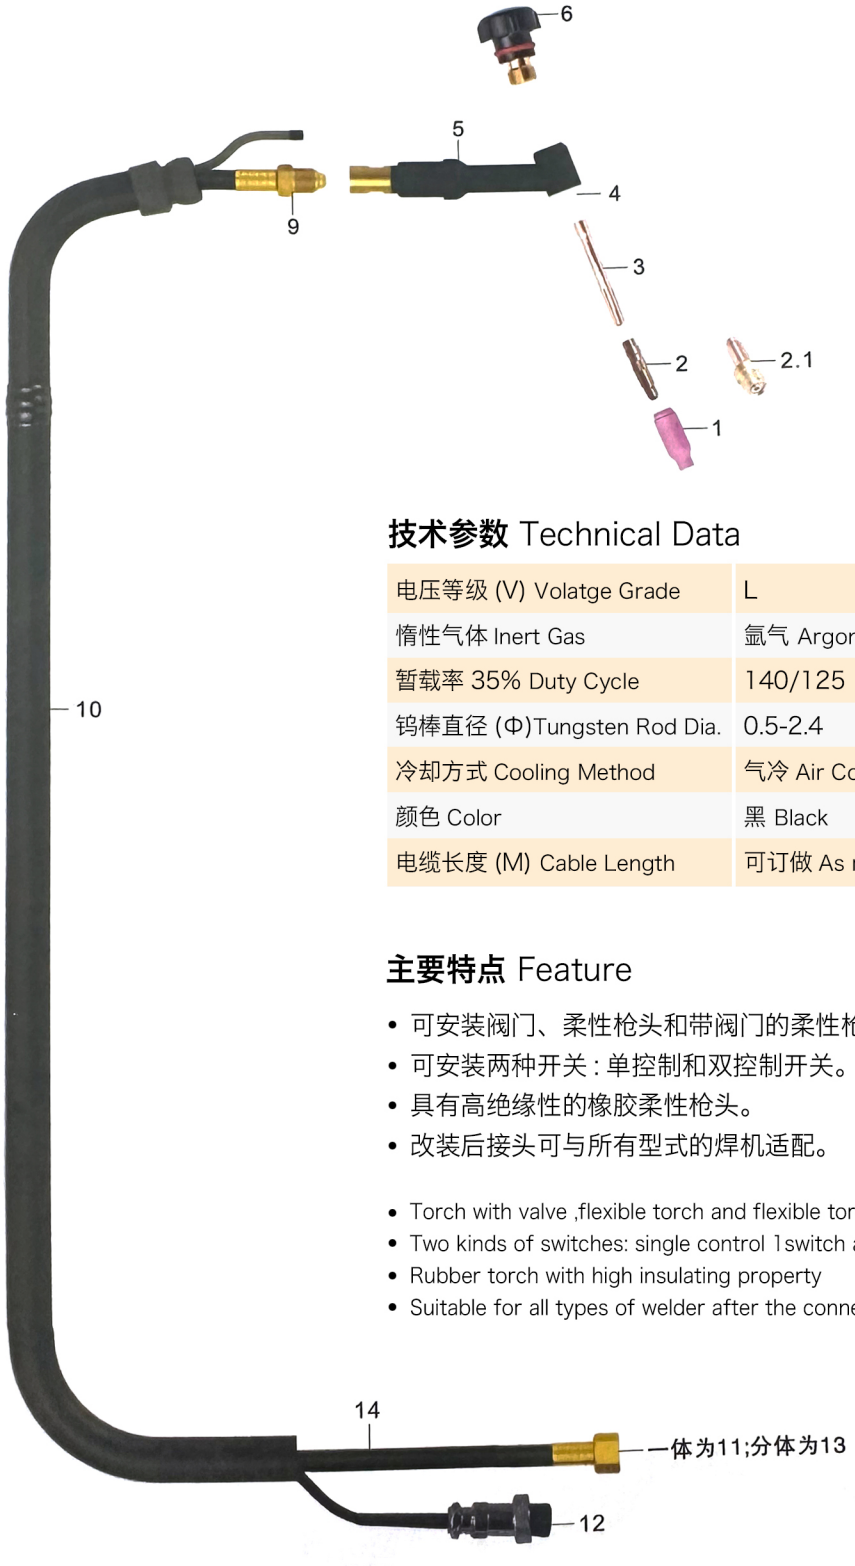

技术参数 Technical Data

电压等级 (V) Volatge Grade	L
惰性气体 Inert Gas	氩气 Argon
暂载率 35% Duty Cycle	140/125
钨棒直径 (Φ)Tungsten Rod Dia.	0.5-2.4
冷却方式 Cooling Method	气冷 Air Cooled
颜色 Color	黑 Black
电缆长度 (M) Cable Length	可订做 As required

主要特点 Feature

- 可安装阀门、柔性枪头和带阀门的柔性枪头。
- 可安装两种开关 : 单控制和双控制开关。
- 具有高绝缘性的橡胶柔性枪头。
- 改装后接头可与所有型式的焊机适配。

- Torch with valve ,flexible torch and flexible torch with valve are available
- Two kinds of switches: single control 1switch and dual control switch
- Rubber torch with high insulating property
- Suitable for all types of welder after the connector is refitted

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

TIG 焊枪 硅橡胶系列 WP-17（技术参数 Technical Data）

额定电流（A)Rated Current	负载持续率（%）Duty Cycle	氩气：流量（1/min）Argon：Gas Flow	冷却方式（Cooling Method）
150	35	7（±5%）	气冷（Air Cooled）

图文代号 NO.		名称 Article	规格 Description
	1	喷嘴 Ceramin Nozzle	4#10N50=6.3*47 5#10N49=8.0*47 6#10N48=9.6*47 7#10N47=11*47 8#10N46=12.5*47 10#10N45 12#10N44
			53N18=6.5*42 53N17=8.0*42 53N16=9.5*42 53N15=11*42 53N14=12.5*42 57N88=16*48 57N87=19.5*48
	2	导流件 Collet Body	10N28=3.2*3/8*32 10N29=0.5*3/8*32 10N30=1.0*3/8*32 10N31=1.6*3/8*32 10N32=2.4*3/8*32
	2.1	网状导流件 Gras Lens Body	45V29 Φ0.5 45V24 Φ1.0 45V25 Φ1.6 45V26 Φ2.4 45V27 Φ3.2 45V28 Φ4.0
	3	夹头 Collet	10N22=1.0*50 10N23=1.6*50 10N2X=2.0*50 10N24=2.4*50 10N25=3.2*50 54N20=4.0*50
	4	下盖 Insulator	CG0002 18CG
	5	主体 Torch Body	WP-17
			WP-17V
			WP-17FV
			WP-17F
			WP-17P

图文代号 NO.		名称 Article	规格 Description
	6	长帽 Long Back Cap	BC0066 57Y02
		短帽 Short Back Cap	BC0067 57Y04
	7	手柄套 Tubular Handle	H0005
		TIG 手柄套（橙色）TIG Orange Handle	H007-1
		TIG 手柄套（蓝色）TIG Blue Handle	H007-2
		TIG 手柄套（绿色）TIG Green Handle	H007-3
		TIG 手柄套（黑色）TIG Black Handle	H007-4
	8	微动开关 Micro Switch	东海开关 DongHai Switch
			红旗开关 HongQi Switch
	9	上接头 Top Connector	分体 Separate
			一体 Whole
	10	上接头 Top Connector	帆布布套 Canvas Cover
			橡塑护套 Rubber Cover
			高级波纹护套 Senior corrugated Cover
	11	气管下接头（分体）Gas Nut (Separate)	M16*1.5
			M10*1
			M12*1
			G5/8-18
		气电分体转一体 Saparated Power& Gas to Whole	M16*1.5

图文代号 NO.		名称 Article	规格 Description
	12	航空插 Switch Connector	普通二芯航空插 General 2 Pins Plug
			二芯航空插 2 Pins Plug
			松下航空插 Panasonic Plug
	13 主电缆接头（Connector for Cable）	板式转换接头 Plate-type Connector	
		线鼻子 Lug	150A
		欧式接头 Water Con-version Plug	10-25# 35-50# 70-95#
		快插接头 Cable Plug	10-25 35-50 50-70 70-95 16# 35# 50# 70# 95#
		十字气开关 Cross Gas Switch	
		螺母接头 Nut	M16*1.5
		外螺纹接头 Nut(Extern-al Thread)	G7/8-14
	14 主电缆管（Cable Tube）	白优管 Woven Tube	8*13
		耐高温管 High Temp-erature Resistant Tube	8*13
	15 气管（Gas Hose）	橡塑管 Rubber Hose	5*8 黑色 Black

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH






No.	Part Number	Description
	WP-18-4M	WP-18 Water-Cooled Torch 4m
	WP-18-8M	WP-18 Water-Cooled Torch 8m
1	WP-18	Torch body
2	98W18	Back Cap 'O' Ring
3	57Y04	Short Back Cap
4	57Y05	Medium back cap
5	57Y02	Long back cap
6	H-200DC	Tig Handle Double Color
7	XL1MS	Momentary Kit
8	40V64RE	Rubber Power Cable 4m
	41V29RE	Rubber Power Cable 8m
9	40V75RE	Rubber Gas Hose 4m
	41V30RE	Rubber Gas Hose 8m
10	40V74RE	Rubber Water Hose 4m
	41V32RE	Rubber Water Hose 8m
11	XL5SL	Switch Lead
12	XLKLB	Knuckle Joint & Lock Nut Big
13	XLNV25	Neoprene Cover
14	XLPCM12	Power Cable Connection M12*1
15	XL501.0114	Connection Piug Nipple ND 5mm
16	XLPGX16	Switch Wire Plug GX-16
17	XLIBR	Insulating Blanket Rubbe
18	XLPA1250	Power Cable Adaptor M12135-50
19	XLPAN1250W	Power Cable Adaptor New Water M12135-50

No.	Part Number
A	Standard Series
B	Stubby Series
C	Stubby Gas Lens Series
D	Gas Lens Series
E	Large Gas Lens Series


技术参数 Technical Data

- Water-Cooled Tig Welding Torch
- Rating: 380A DC/270A AC @ 100% Duty Cycle
- 0.040"-5/32"/1.0mm-4.0mm Electrodes

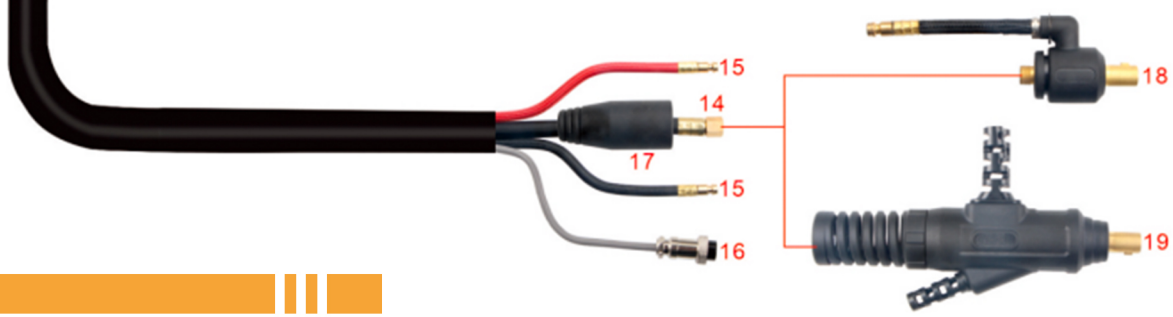

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

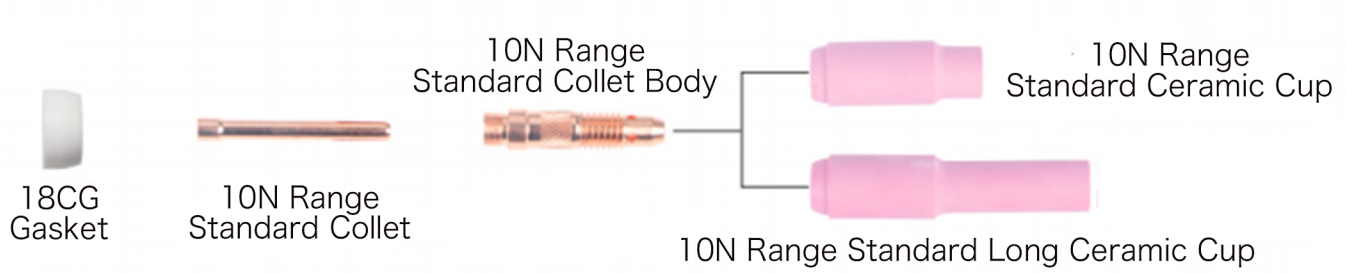



1 2 3 4 5

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	17CB20	Stubby Collet Body	3.5	
2	NCB-36	Heavy Duty Collet Body	5.0	
	NCB-53	Heavy Duty Collet Body	3.4	
3	10N25HD	Heavy Duty Collet	3.2	1/8
	54N20HD	Heavy Duty Collet	4.0	5/32
	18C36	Heavy Duty Collet	4.8	3/16
4	10N21	Standard Collet	0.5	0.020
	10N22	Standard Collet	1.0	0.040
	10N23	Standard Collet	1.6	1/16
	10N23M	Standard Collet	2.0	5/64
	10N24	Standard Collet	2.4	3/32
	10N25	Standard Collet	3.2	1/8
	54N20	Standard Collet	4.0	5/32
5	10N21S	Stubby Collet	0.5	0.020
	10N22S	Stubby Collet	1.0	0.040
	10N23S	Stubby Collet	1.6	1/16
	10N23MS	Stubby Collet	2.0	5/64
	10N24S	Stubby Collet	2.4	3/32
	10N25S	Stubby Collet	3.2	1/8

氩弧焊焊枪


GAS TUNGSTEN ARC WELDING TORCH




1



2



3



4



5

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	17GL040	Stubby Gas Lens Body	1.0	0.040
	17GL116	Stubby Gas Lens Body	1.6	1/16
	17GL564	Stubby Gas Lens Body	2.0	5/64
	17GL332	Stubby Gas Lens Body	2.4	3/32
	17GL18	Stubby Gas Lens Body	3.2	1/8
2	45V29S	Stubby Medium Gas Lens Body	0.5	0.020
	45V24S	Stubby Medium Gas Lens Body	1.0	0.040
	45V25S	Stubby Medium Gas Lens Body	1.6	1/16
	45V25MS	Stubby Medium Gas Lens Body	2.0	5/64
	45V26S	Stubby Medium Gas Lens Body	2.4	3/32
	45V27S	Stubby Medium Gas Lens Body	3.2	1/8
3	45V29	Gas Lens Body	0.5	0.020
	45V24	Gas Lens Body	1.0	0.040
	45V25	Gas Lens Body	1.6	1/16
	45V25M	Gas Lens Body	2.0	5/64
	45V26	Gas Lens Body	2.4	3/32
	45V27	Gas Lens Body	3.2	1/8
	45V28	Gas Lens Body	4.0	5/32
4	45V0204	Large Diameter Gas Lens Body	1.0	0.040
	45V116	Large Diameter Gas Lens Body	1.6	1/16
	45V116M	Large Diameter Gas Lens Body	2.0	5/64
	45V64	Large Diameter Gas Lens Body	2.4	3/32
	995795	Large Diameter Gas Lens Body	3.2	1/8
	45V63	Large Diameter Gas Lens Body	4.0	5/32
5	10N29	Standard Collet Body	0.5	0.020
	10N30	Standard Collet Body	1.0	0.040
	10N31	Standard Collet Body	1.6	1/16
	10N31M	Standard Collet Body	2.0	5/64
	10N32	Standard Collet Body	2.4	3/32
	10N28	Standard Collet Body	3.2	1/8
	406488	Standard Collet Body	4.0	5/32

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



1 2 3 4 5 6 7

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	18GL16	Gas Lens Body	1.6	1/16
	18GL16M	Gas Lens Body	2.0	5/64
	18GL32	Gas Lens Body	2.4	3/32
	18GL18	Gas Lens Body	3.2	1/8
	18GL53	Gas Lens Body	4.0	5/32
	18GL36	Gas Lens Body	4.8	3/16

No.	Part No.	Description	Size	BoreA(mm)	BoreA(inch)
2	57N75XL	Large Diameter Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	57N74XL	Large Diameter Gas Lens Extra Long Ceramic Cup	8	12.5	1/2
	53N88XL	Large Diameter Gas Lens Extra Long Ceramic Cup	10	16	5/8
	53N87XL	Large Diameter Gas Lens Extra Long Ceramic Cup	12	19	3/4
3	53N58L	Gas Lens Long Ceramic Cup	4	6	1/4
	53N59L	Gas Lens Long Ceramic Cup	5	8	5/16
	53N60L	Gas Lens Long Ceramic Cup	6	9.5	3/8
	53N61L	Gas Lens Long Ceramic Cup	7	11	7/16
	53N61SL	Gas Lens Long Ceramic Cup	8	12.5	1/2
4	53N58ML	Gas Lens Medium Long Ceramic Cup	4	6	1/4
	53N59ML	Gas Lens Medium Long Ceramic Cup	5	8	5/16
	53N60ML	Gas Lens Medium Long Ceramic Cup	6	9.5	3/8
	53N61ML	Gas Lens Medium Long Ceramic Cup	7	11	7/16
	53N61SML	Gas Lens Medium Long Ceramic Cup	8	12.5	1/2
5	53N58XL	Gas Lens Extra Long Ceramic Cup	4	6	1/4
	53N59XL	Gas Lens Extra Long Ceramic Cup	5	8	5/16
	53N60XL	Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	53N61XL	Gas Lens Extra Long Ceramic Cup	7	11	7/16
	53N61SXL	Gas Lens Extra Long Ceramic Cup	8	12.5	1/2
6	10N50	Standard Ceramic Cup	4	6	1/4
	10N49	Standard Ceramic Cup	5	8	5/16
	10N48	Standard Ceramic Cup	6	9.5	3/8
	10N47	Standard Ceramic Cup	7	11	7/16
	10N46	Standard Ceramic Cup	8	12.5	1/2
	10N45	Standard Ceramic Cup	10	16	5/8
	10N44	Standard Ceramic Cup	12	19	3/4
7	105Z43	Conicity Ceramic Cup	4	6	1/4
	105Z42	Conicity Ceramic Cup	5	8	5/16
	105Z44	Conicity Ceramic Cup	6	9.5	3/8
	105Z45	Conicity Ceramic Cup	7	11	7/16

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH




1 2 3 4 5 6 7 8

No.	Part No.	Description	Size	BoreA(mm)	BoreA(inch)
1	10N50L	Standard Long Ceramic Cup	4	6	1/4
	10N49L	Standard Long Ceramic Cup	5	8	5/16
	10N48L	Standard Long Ceramic Cup	6	9.5	3/8
	10N47L	Standard Long Ceramic Cup	7	11	7/16
	10N46L	Standard Long Ceramic Cup	8	12.5	1/2
2	53N58	Gas Lens Ceramic Cup	4	6	1/4
	53N59	Gas Lens Ceramic Cup	5	8	5/16
	53N60	Gas Lens Ceramic Cup	6	9.5	3/8
	53N61	Gas Lens Ceramic Cup	7	11	7/16
	53N61S	Gas Lens Ceramic Cup	8	12.5	1/2
3	54N16SW	Medium Gas Lens Ceramic Cup	6	9.5	3/8
	54N15SW	Medium Gas Lens Ceramic Cup	7	11	7/16
	54N14SW	Medium Gas Lens Ceramic Cup	8	12.5	1/2
	54N12SW	Medium Gas Lens Ceramic Cup	10	16	5/8
4	54N18	Gas Lens Ceramic Cup	4	6	1/4
	54N17	Gas Lens Ceramic Cup	5	8	5/16
	54N16	Gas Lens Ceramic Cup	6	9.5	3/8
	54N15	Gas Lens Ceramic Cup	7	11	7/16
	54N14	Gas Lens Ceramic Cup	8	12.5	1/2
	54N19	Gas Lens Ceramic Cup	12	19	3/4
5	54N18L	Long Gas Lens Ceramic Cup	4	6	1/4
	54N17L	Long Gas Lens Ceramic Cup	5	8	5/16
	54N16L	Long Gas Lens Ceramic Cup	6	9.5	3/8
	54N15L	Long Gas Lens Ceramic Cup	7	11	7/16
	54N14L	Long Gas Lens Ceramic Cup	8	12.5	1/2
6	53N 89	Large Diameter Gas Lens Ceramic Cup	15	24	15/16
7	57N75	Large Diameter Gas Lens Ceramic Cup	6	9.5	3/8
	57N74	Large Diameter Gas Lens Ceramic Cup	8	12.5	1/2
	53N88	Large Diameter Gas Lens Ceramic Cup	10	16	5/8
	53N87	Large Diameter Gas Lens Ceramic Cup	12	19	3/4
8	57N75L	Large Diameter Gas Lens Long Ceramic Cup	6	9.5	3/8
	57N74L	Large Diameter Gas Lens Long Ceramic Cup	8	12.5	1/2
	53N88L	Large Diameter Gas Lens Long Ceramic Cup	10	16	5/8
	53N87L	Large Diameter Gas Lens Long Ceramic Cup	12	19	3/4

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

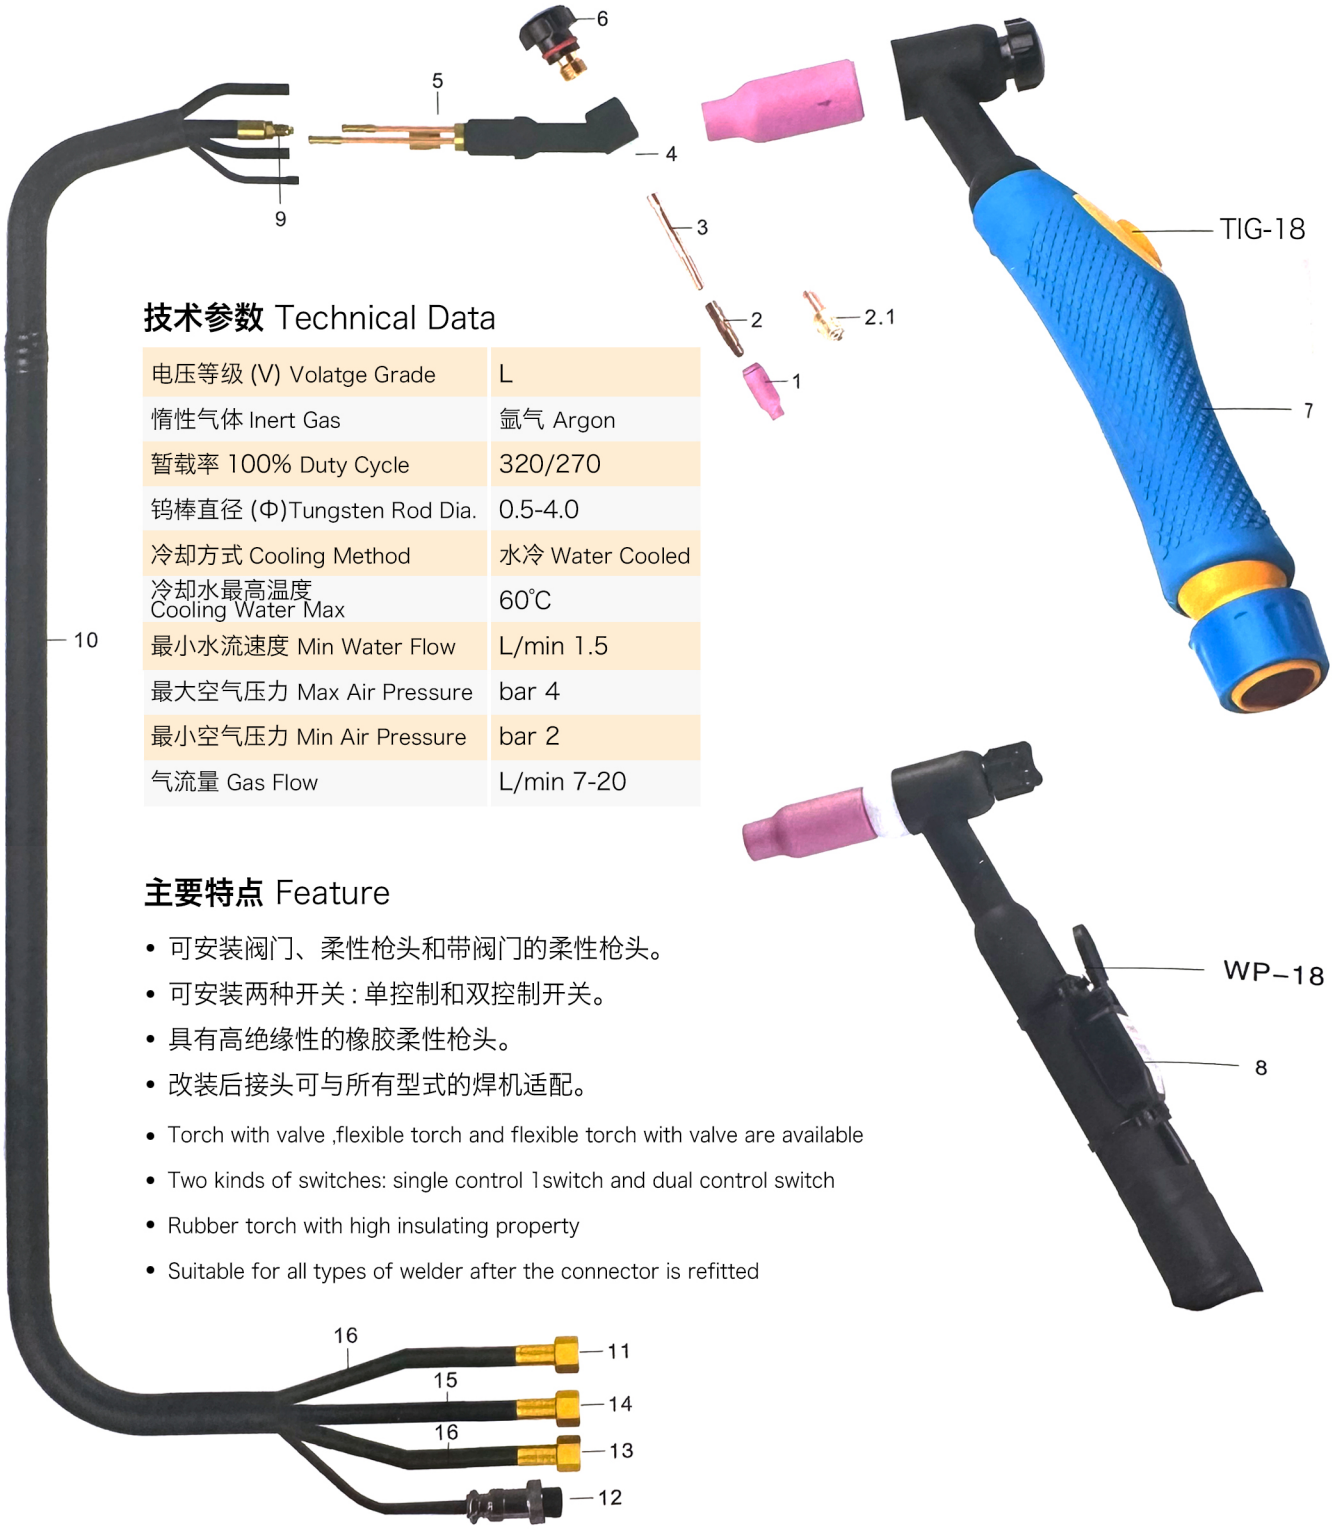

技术参数 Technical Data

电压等级 (V) Volatge Grade	L
惰性气体 Inert Gas	氩气 Argon
暂载率 100% Duty Cycle	320/270
钨棒直径 (Φ)Tungsten Rod Dia.	0.5-4.0
冷却方式 Cooling Method	水冷 Water Cooled
冷却水最高温度 Cooling Water Max	60℃
最小水流速度 Min Water Flow	L/min 1.5
最大空气压力 Max Air Pressure	bar 4
最小空气压力 Min Air Pressure	bar 2
气流量 Gas Flow	L/min 7-20

主要特点 Feature


- 可安装阀门、柔性枪头和带阀门的柔性枪头。
- 可安装两种开关 : 单控制和双控制开关。
- 具有高绝缘性的橡胶柔性枪头。
- 改装后接头可与所有型式的焊机适配。
- Torch with valve ,flexible torch and flexible torch with valve are available
- Two kinds of switches: single control 1switch and dual control switch
- Rubber torch with high insulating property
- Suitable for all types of welder after the connector is refitted

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

TIG 焊枪 硅橡胶系列 WP-18（技术参数 Technical Data）

额定电流（A)Rated Current	负载持续率（%）Duty Cycle	氩气：流量（1/min）Argon：Gas Flow	冷却方式（Cooling Method）
350	60/100	11（±5%）	水冷（Water Cooled）

图文代号 NO.		名称 Article	规格 Description
	1	喷嘴 Ceramin Nozzle	4#10N50=6.3*47 5#10N49=8.0*47 6#10N48=9.6*47 7#10N47=11*47 8#10N46=12.5*47 10#10N45 12#10N44
			53N18=6.5*42 53N17=8.0*42 53N16=9.5*42 53N15=11*42 53N14=12.5*42 57N88=16*48 57N87=19.5*48
	2	导流件 Collet Body	10N28=3.2*3/8*32 10N29=0.6*3/8*32 10N30=1.0*3/8*32 10N31=1.6*3/8*32 10N32=2.4*3/8*32
	2.1	网状导流件 Gras Lens Body	45V29 Φ0.5 45V24 Φ1.0 45V25 Φ1.6 45V26 Φ2.4 45V27 Φ3.2 45V28 Φ4.0
	3	夹头 Collet	10N22=1.0*50 10N23=1.6*50 10N2X=2.0*50 10N24=2.4*50 10N25=3.2*50 54N20=4.0*50
	4	下盖 Insulator	CG0002 18CG
	5	主体 Torch Body	WP-26 WP-26V WP-26FV WP-26F WP-26P


图文代号 NO.		名称 Article	规格 Description
	6	长帽 Long Back Cap	BC0066 57Y02
		短帽 Short Back Cap	BC0067 57Y04
	7	手柄套 Tubular Handle	H0001
		TIG 手柄套（橙色）TIG Orange Handle	H007-1
		TIG 手柄套（蓝色）TIG Blue Handle	H007-2
		TIG 手柄套（绿色）TIG Green Handle	H007-3
		TIG 手柄套（黑色）TIG Black Handle	H007-4
	8	微动开关 Micro Switch	东海开关 DongHai Switch
			红旗开关 HongQi Switch
	9	上接头 Top Connector	
	10	上接头 Top Connector	帆布布套 Canvas Cover
			橡塑护套 Rubber Cover
			高级波纹护套 Senior corrugated Cover
	11	气管下接头（分体）Gas Nut (Separate)	M16*1.5 M10*1 M12*1 G5/8-18

图文代号 NO.		名称 Article	规格 Description	
	12	航空插 Switch Connector	普通二芯航空插 General 2 Pins Plug	
			二芯航空插 2 Pins Plug	
			松下航空插 Panasonic Plug	
	13	水管下接头 Water Nut	M16*1.5	
			M10*1	
			M12*1	
			G5/8-18	
	14 主电缆接头 (Connector for Cable)	板式转换接头 Plate-type Connector		
		欧式接头 Water Con-version Plug	10-25# 35-50# 70-95#	
		快插接头 Cable Plug	10-25 35-50 50-70 70-95	16# 35# 50# 70# 95#
		十字气开关 Cross Gas Switch		
		螺母接头 Nut	M16*1.5	
		外螺纹接头 Nut(Extern-al Thread)	G7/8-14	
	15 主电缆管 (Cable Tube)	白优管 Woven Tube	8*13	
		耐高温管 High Temp-erature Resistant Tube	8*13	
	16 气/水管 (Gas Water Hose)	橡塑管 Rubber Hose	5*8 黑色 Black	
		PVC 管 PVC Hose	5*8 红色 Red	

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



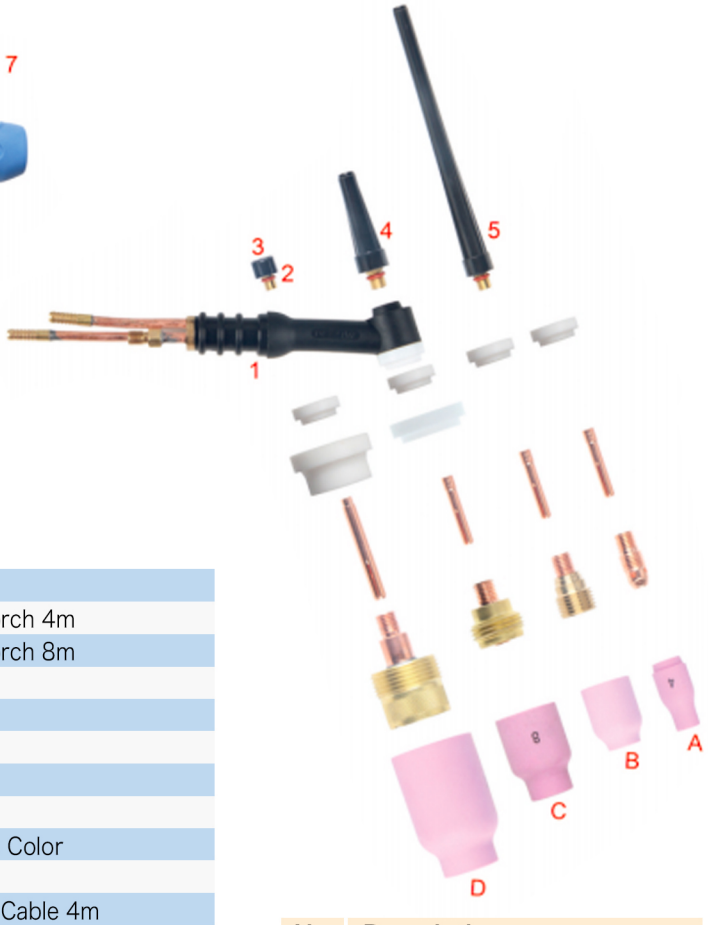

No.	Part Number	Description
	WP-20-4M	WP-20 Water-Cooled Torch 4m
	WP-20-8M	WP-20 Water-Cooled Torch 8m
1	WP-20	Torch Body
2	98W77	Back Cap 'O' Ring
3	41V33	Short Back Cap
4	41V35	Medium back cap
5	41V24	Long back cap
6	H-200SDC	Small Tig Handle Double Color
7	XL1MS	Momentary Kit
8	45V03RE	WP-24W Rubber Power Cable 4m
	45V04RE	WP-24W Rubber Power Cable 8m
9	45V09RE	Rubber Gas Hose 4m
	45V10RE	Rubber Gas Hose 8m
10	45V07RE	Rubber Water Hose 4m
	45V08RE	Rubber Water Hose 8m
11	XL5SL	Switch Lead
12	XLKLS	Knuckle Joint & Lock Nut Small
13	XLNV20	Neoprene Cover
14	XLPCM12	Power Cable Connection M12*1
15	XL501.0114	Gas Connection Plug Nipple ND 5mm
16	XLPGX16	Switch Wire Plug GX-16
17	XLIBR	Insulating Blanket Rubber
18	XLPA1225	Power Cable Adaptor M12/10-25

No.	Description
A	Standard Series
B	Gas Lens Series
C	Medium Gas Lens Series
D	Large Gas Lens Series

技术参数 Technical Data


- Water-Cooled Tig Welding Torch
- Rating:250A DC/190A AC @ 100% Duty Cycle
- .020"-1/8"/0.5-3.2mm Electrodes





氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

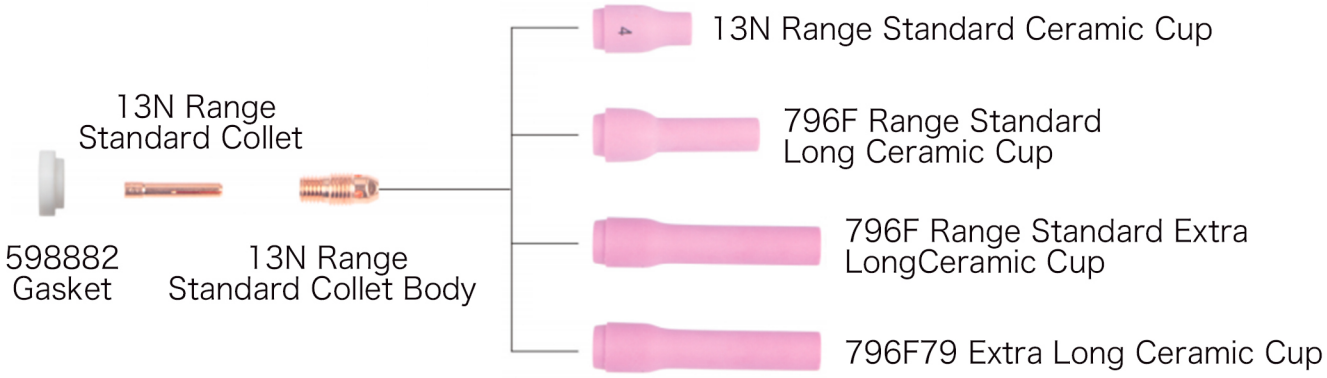



No.	Part No.	Description	Electrode(mm)	Size(inch)
1	13N20	Standard Collet	0.5	0.020
	13N21	Standard Collet	1.0	0.040
	13N22	Standard Collet	1.6	1/16
	13N22M	Standard Collet	2.0	5/64
	13N23	Standard Collet	2.4	3/32
	13N24	Standard Collet	3.2	1/8
2	13N20L	Large Diameter Gas Lens Collet	0.5	0.020
	13N21L	Large Diameter Gas Lens Collet	1.0	0.040
	13N22L	Large Diameter Gas Lens Collet	1.6	1/16
	13N22ML	Large Diameter Gas Lens Collet	2.0	5/64
	13N23L	Large Diameter Gas Lens Collet	2.4	3/32
	13N24L	Large Diameter Gas Lens Collet	3.2	1/8
3	STB13N20	Stubby Collet	0.5	0.020
	STB13N21	Stubby Collet	1.0	0.040
	STB13N22	Stubby Collet	1.6	1/16
	STB13N22M	Stubby Collet	2.0	5/64
	STB13N23	Stubby Collet	2.4	3/32
4	13N25	Standard Collet Body	0.5	0.020
	13N26	Standard Collet Body	1.0	0.040
	13N27	Standard Collet Body	1.6	1/16
	13N27M	Standard Collet Body	2.0	5/64
	13N28	Standard Collet Body	2.4	3/32
	13N29	Standard Collet Body	3.2	1/8

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH




1 2 3 4 5 6 7

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	SS45V24	Short Gas Lens Body	1.0	0.040
	SS45V25	Short Gas Lens Body	1.6	1/16
	SS45V26	Short Gas Lens Body	2.4	3/32
2	S45V24	Short Gas Lens Body	1.0	0.040
	S45V25	Short Gas Lens Body	1.6	1/16
	S45V26	Short Gas Lens Body	2.4	3/32
3	45V41	Gas Lens Body	0.5	0.020
	45V42	Gas Lens Body	1.0	0.040
	45V43	Gas Lens Body	1.6	1/16
	45V43M	Gas Lens Body	2.0	5/64
	45V44	Gas Lens Body	2.4	3/32
	45V45	Gas Lens Body	3.2	1/8
4	45V35SW	Stubby Medium Gas Lens Body	1.6	1/16
	45V36SW	Stubby Medium Gas Lens Body	2.4	3/32
	45V37SW	Stubby Medium Gas Lens Body	3.2	1/8
	45V38SW	Stubby Medium Gas Lens Body	4.0	5/32
5	45V0204S	Large Diameter Gas Lens Body	1.0	0.040
	45V116S	Large Diameter Gas Lens Body	1.6	1/16
	45V116MS	Large Diameter Gas Lens Body	2.0	5/64
	45V64S	Large Diameter Gas Lens Body	2.4	3/32
	995795S	Large Diameter Gas Lens Body	3.2	1/8
	45V63S	Large Diameter Gas Lens Body	4.0	5/32

No.	Part No.	Description	Size	BoreA	
				MM	INCH
1	53N58L	Gas Lens Long Ceramic Cup	4	6	1/4
	53N59L	Gas Lens Long Ceramic Cup	5	8	5/16
	53N60L	Gas Lens Long Ceramic Cup	6	9.5	3/8
	53N61L	Gas Lens Long Ceramic Cup	7	11	7/16
	53N61SL	Gas Lens Long Ceramic Cup	8	12.5	1/2
2	53N58ML	Gas Lens Medium Long Ceramic Cup	4	6	1/4
	53N59ML	Gas Lens Medium Long Ceramic Cup	5	8	5/16
	53N60ML	Gas Lens Medium Long Ceramic Cup	6	9.5	3/8
	53N61ML	Gas Lens Medium Long Ceramic Cup	7	11	7/16
	53N61SML	Gas Lens Medium Long Ceramic Cup	8	12.5	1/2

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

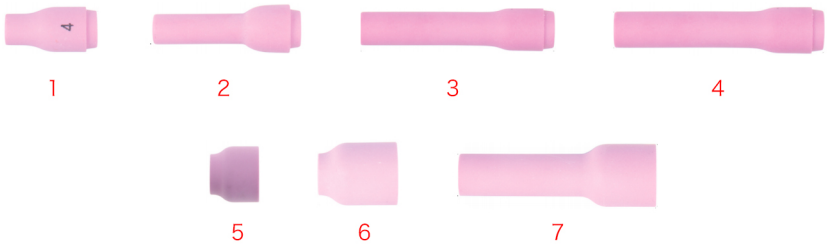


No.	Part No.	Description	Size	BoreA(mm)	BoreA(inch)
1	13N08	Standard Ceramic Cup	4	6	1/4
	13N09	Standard Ceramic Cup	5	8	5/16
	13N10	Standard Ceramic Cup	6	9.5	3/8
	13N11	Standard Ceramic Cup	7	11	7/16
	13N12	Standard Ceramic Cup	8	12.5	1/2
	13N13	Standard Ceramic Cup	10	16	5/8
2	796F70	Standard Long Ceramic Cup	3	5	3/16
	796F71	Standard Long Ceramic Cup	4	6	1/4
	796F72	Standard Long Ceramic Cup	5	8	5/16
	796F73	Standard Long Ceramic Cup	6	9.5	3/8
3	796F74	Standard Extra Long Ceramic Cup	3	5	3/16
	796F75	Standard Extra Long Ceramic Cup	4	6	1/4
	796F76	Standard Extra Long Ceramic Cup	5	8	5/16
	796F77	Standard Extra Long Ceramic Cup	6	9.5	3/8
4	796F79	Extra Long Ceramic Cup	4	6	1/4
5	53N61MS	Short Gas Lens Ceramic Cup		10.4	
6	53N58	Gas Lens Ceramic Cup	4	6	1/4
	53N59	Gas Lens Ceramic Cup	5	8	5/16
	53N60	Gas Lens Ceramic Cup	6	9.5	3/8
	53N61	Gas Lens Ceramic Cup	7	11	7/16
	53N61S	Gas Lens Ceramic Cup	8	12.5	1/2
7	53N58XL	Gas Lens Extra Long Ceramic Cup	4	6	1/4
	53N59XL	Gas Lens Extra Long Ceramic Cup	5	8	5/16
	53N60XL	Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	53N61XL	Gas Lens Extra Long Ceramic Cup	7	11	7/16
	53N61SXL	Gas Lens Extra Long Ceramic Cup	8	12.5	1/2

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



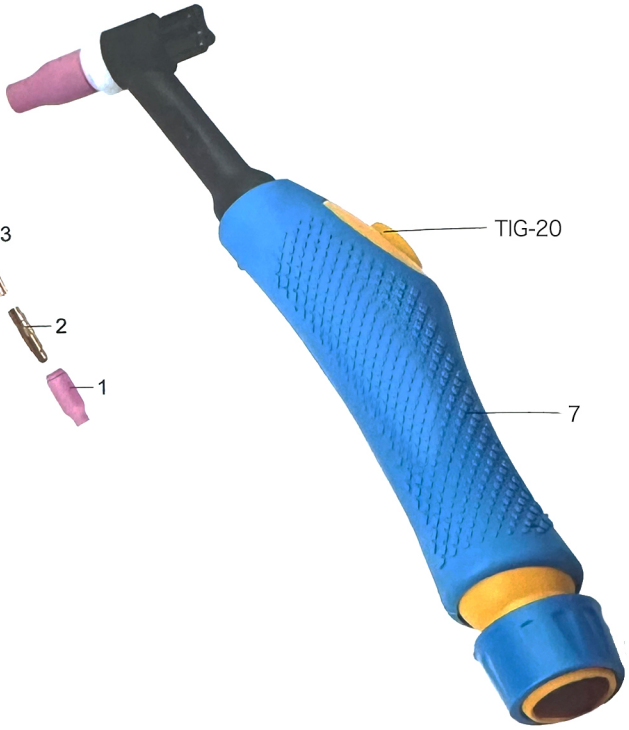



技术参数 Technical Data

电压等级（V） Volatge Grade	L
惰性气体 Inert Gas	氩气 Argon
暂载率 100% Duty Cycle	320/270
钨棒直径 (Φ) Tungsten Rod Dia.	0.5-4.0
冷却方式 Cooling Method	水冷 Water Cooled
冷却水最高温度 Cooling Water Max Tempersture	60°C
最小水流迪度 Min Water Flow	L/min 1.5
最大空气压力 Max Air Pressure	bar 4
最小空气压力 Min Air Pressure	bar 2
气流量 Gas Flow	L/min 7-20

主要特点 Feature

- 可安装阀门、柔性枪头和带阀门的柔性枪头。
- 可安装两种开关：单控制和双控制开关。
- 具有高绝缘性的橡胶柔性枪头。
- 改装后接头可与所有型式的焊机适配。

- Torch with valve ,flexible torch and flexible torch with valve are available
- Two kinds of switches: single control switch and dual control switch
- Rubber torch with high insulating property
- Suitable for all types of welder after the connector is refitted

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

TIG 焊枪 硅橡胶系列 WP-20（技术参数 Technical Data）

额定电流（A)Rated Current	负载持续率（%）Duty Cycle	氩气：流量（1/min）Argon：Gas Flow	冷却方式（Cooling Method）
350	60/100	11（±5%）	水冷（Water Cooled）

图文代号 NO.		名称 Article	规格 Description
	1	喷嘴 Ceramin Nozzle	4#13N08=6.5*30 5#13N09=8.0*30 6#13N10=9.5*30 7#13N11=11*30 8#13N12=12.5*30 10#13N13
			53N58=6.5*25.5 53N59=8.0*25.5 53N60=9.5*25.5 53N61=11*25.5 53N61S=12.5*25.5
	2	导流件 Collet Body	13N25=0.5*3/8*24 13N26=1.0*3/8*24 13N27=1.6*3/8*24 13N28=2.4*3/8*24 13N29=3.2*3/8*24
	3	夹头 Collet	13N20=0.5*25 13N21=1.0*25 13N22=1.6*25 13N23=2.4*25 13N24=3.2*25
	4	下盖 Insulator	CG0001 598882
	5	主体 Torch Body	SR-20

图文代号 NO.		名称 Article	规格 Description
	6	长帽 Long Back Cap	BC0063 41V24
		短帽 Short Back Cap	BC0065 41V33
	7	手柄套 Tubular Handle	H0005
		TIG 手柄套（橙色）TIG Orange Handle	H007-1
		TIG 手柄套（蓝色）TIG Blue Handle	H007-2
		TIG 手柄套（绿色）TIG Green Handle	H007-3
		TIG 手柄套（黑色）TIG Black Handle	H007-4
	8	微动开关 Micro Switch	东海开关 DongHai Switch
			红旗开关 HongQi Switch
	9	上接头 Top Connector	
	10	上接头 Top Connector	帆布布套 Canvas Cover
			橡塑护套 Rubber Cover
			高级波纹护套 Senior corrugated Cover
	11	气管下接头（分体）Gas Nut (Separate)	M16*1.5
			M10*1
			M12*1
			G5/8-18

图文代号 NO.		名称 Article	规格 Description	
	12	航空插 Switch Connector	普通二芯航空插 General 2 Pins Plug	
			二芯航空插 2 Pins Plug	
			松下航空插 Panasonic Plug	
	13	水管下接头 Water Nut	M16*1.5	
			M10*1	
			M12*1	
			G5/8-18	
	14 主电缆接头 (Connector for Cable)	板式转换接头 Plate-type Connector		
		欧式接头 Water Con-version Plug	10-25# 35-50# 70-95#	
		快插接头 Cable Plug	10-25 35-50 50-70 70-95	16# 35# 50# 70# 95#
		十字气开关 Cross Gas Switch		
		螺母接头 Nut	M16*1.5	
		外螺纹接头 Nut(Extern-al Thread)	G7/8-14	
	15 主电缆管 (Cable Tube)	白优管 Woven Tube	8*13	
		耐高温管 High Temp-erature Resistant Tube	8*13	
	16 气/水管 (Gas Water Hose)	橡塑管 Rubber Hose	5*8 黑色 Black	
		PVC 管 PVC Hose	5*8 红色 Red	

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



No.	Part Number	Description
	WP-26-1-4M	WP-26 Torch (Gas and Power Whole) 4m
	WP-26-1-8M	WP-26 Torch (Gas and Power Whole) 8m
	WP-26-2-4M	WP-26 Torch (Gas and Power Separate) 4m
	WP-26-2-8M	WP-26 Torch (Gas and Power Separate) 8m
1	WP-26	Torch body
2	98W18	Back Cap 'O' Ring
3	57Y04	Short Back Cap
4	57Y05	Medium back cap
5	57Y02	Long back cap
6	H-200DC	Tig Handle Double Color
7	XL1MS	Momentary Kit
8	46V28RE	Rubber Power Cable 4m
	46V30RE	Rubber Power Cable 8m
9	46V28R-2E	Power Cable Optional 2PC 4m
	46V30R-2E	Power Cable Optional 2PC 8m
10	XL5SL	Switch Lead
11	XLKLM	Knuckle Joint & Lock Nut Medium
12	XLNV25	Neoprene Cover
13	XLPCM12	Power Cable Connection M12*1
14	XLE3550	Power Cable Connection Euro 35-50
15	XL501.0114	Gas Connection Plug Nipple ND 5mm
16	XLPGX16	Switch Wire Plug GX-16
17	XLIBR	Insulating Blanket Rubber
18	XLPA1250	Power Cable Adaptor M12/35-50
19	XLPAN1250	Power Cable Adaptor New M12/35-50


No.	Part Number
A	Standard Series
B	Stubby Series
C	Stubby Gas Lens Series
D	Gas Lens Series
E	Large Gas Lens Seres

技术参数 Technical Data

- Air-Cooled Tig Welding Torch
- Rating:250A DC/160A AC @ 60% Duty Cycle
- 0.040"-5/32"/1.0-4.0mm Electrodes

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

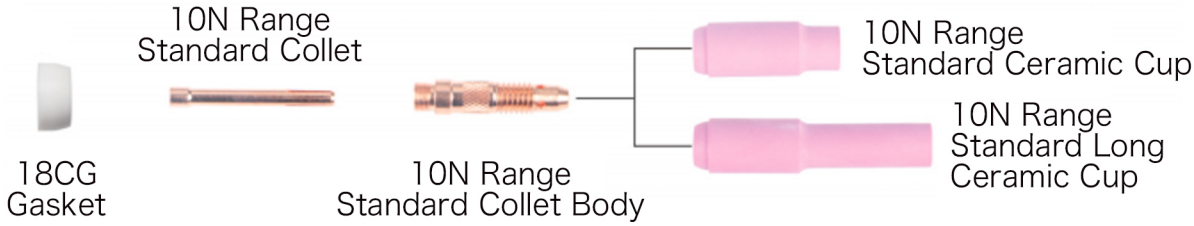





1 2 3 4

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	10N21	Standard Collet	0.5	0.020
	10N22	Standard Collet	1.0	0.040
	10N23	Standard Collet	1.6	1/16
	10N23M	Standard Collet	2.0	5/64
	10N24	Standard Collet	2.4	3/32
	10N25	Standard Collet	3.2	1/8
	54N20	Standard Collet	4.0	5/32
2	10N21S	Stubby Collet	0.5	0.020
	10N22S	Stubby Collet	1.0	0.040
	10N23S	Stubby Collet	1.6	1/16
	10N23MS	Stubby Collet	2.0	5/64
	10N24S	Stubby Collet	2.4	3/32
	10N25S	Stubby Collet	3.2	1/8
3	10N29	Standard Collet Body	0.5	0.020
	10N30	Standard Collet Body	1.0	0.040
	10N31	Standard Collet Body	1.6	1/16
	10N31M	Standard Collet Body	2.0	5/64
	10N32	Standard Collet Body	2.4	3/32
	10N28	Standard Collet Body	3.2	1/8
	406488	Standard Collet Body	4.0	5/32
4	17CB20	Stubby Collet Body	3.5	

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



1 2 3 4 5

No.	Part No.	Description	Electrode(mm)	Size(inch)
1	17GL040	Stubby Gas Lens Body	1.0	0.040
	17GL116	Stubby Gas Lens Body	1.6	1/16
	17GL564	Stubby Gas Lens Body	2.0	5/64
	17GL332	Stubby Gas Lens Body	2.4	3/32
	17GL18	Stubby Gas Lens Body	3.2	1/8
2	45V29S	Stubby Medium Gas Lens Body	0.5	0.020
	45V24S	Stubby Medium Gas Lens Body	1.0	0.040
	45V25S	Stubby Medium Gas Lens Body	1.6	1/16
	45V25MS	Stubby Medium Gas Lens Body	2.0	5/64
	45V26S	Stubby Medium Gas Lens Body	2.4	3/32
	45V27S	Stubby Medium Gas Lens Body	3.2	1/8
3	45V29	Gas Lens Body	0.5	0.020
	45V24	Gas Lens Body	1.0	0.040
	45V25	Gas Lens Body	1.6	1/16
	45V25M	Gas Lens Body	2.0	5/64
	45V26	Gas Lens Body	2.4	3/32
	45V27	Gas Lens Body	3.2	1/8
	45V28	Gas Lens Body	4.0	5/32
4	45V0204	Large Diameter Gas Lens Body	1.0	0.040
	45V116	Large Diameter Gas Lens Body	1.6	1/16
	45V116M	Large Diameter Gas Lens Body	2.0	5/64
	45V64	Large Diameter Gas Lens Body	2.4	3/32
	995795	Large Diameter Gas Lens Body	3.2	1/8
	45V63	Large Diameter Gas Lens Body	4.0	5/32

No.	Part No.	Description	Size	BoreA	
				MM	INCH
5	53N58	Gas Lens Ceramic Cup	4	6	1/4
	53N59	Gas Lens Ceramic Cup	5	8	5/16
	53N60	Gas Lens Ceramic Cup	6	9.5	3/8
	53N61	Gas Lens Ceramic Cup	7	11	7/16
	53N61S	Gas Lens Ceramic Cup	8	12.5	1/2

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



1 2 3 4 5 6

No.	Part No.	Description	Size	BoreA(mm)	BoreA(inch)
1	53N58L	Gas Lens Long Ceramic Cup	4	6	1/4
	53N59L	Gas Lens Long Ceramic Cup	5	8	5/16
	53N60L	Gas Lens Long Ceramic Cup	6	9.5	3/8
	53N61L	Gas Lens Long Ceramic Cup	7	11	7/16
	53N61SL	Gas Lens Long Ceramic Cup	8	12.5	1/2
2	53N58ML	Gas Lens Medium Long Ceramic Cup	4	6	1/4
	53N59ML	Gas Lens Medium Long Ceramic Cup	5	8	5/16
	53N60ML	Gas Lens Medium Long Ceramic Cup	6	9.5	3/8
	53N61ML	Gas Lens Medium Long Ceramic Cup	7	11	7/16
	53N61SML	Gas Lens Medium Long Ceramic Cup	8	12.5	1/2
3	53N58XL	Gas Lens Extra Long Ceramic Cup	4	6	1/4
	53N59XL	Gas Lens Extra Long Ceramic Cup	5	8	5/16
	53N60XL	Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	53N61XL	Gas Lens Extra Long Ceramic Cup	7	11	7/16
	53N61SXL	Gas Lens Extra Long Ceramic Cup	8	12.5	1/2
4	10N50	Standard Ceramic Cup	4	6	1/4
	10N49	Standard Ceramic Cup	5	8	5/16
	10N48	Standard Ceramic Cup	6	9.5	3/8
	10N47	Standard Ceramic Cup	7	11	7/16
	10N46	Standard Ceramic Cup	8	12.5	1/2
	10N45	Standard Ceramic Cup	10	16	5/8
	10N44	Standard Ceramic Cup	12	19	3/4
5	105Z43	Conicity Ceramic Cup	4	6	1/4
	105Z42	Conicity Ceramic Cup	5	8	5/16
	105Z44	Conicity Ceramic Cup	6	9.5	3/8
	105Z45	Conicity Ceramic Cup	7	11	7/16
6	10N50L	Standard Long Ceramic Cup	4	6	1/4
	10N49L	Standard Long Ceramic Cup	5	8	5/16
	10N48L	Standard Long Ceramic Cup	6	9.5	3/8
	10N47L	Standard Long Ceramic Cup	7	11	7/16
	10N46L	Standard Long Ceramic Cup	8	12.5	1/2

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



1 2 3 4 5 6 7

No.	Part No.	Description	Size	BoreA MM	BoreA INCH
1	54N16SW	Medium Gas Lens Ceramic Cup	6	9.5	3/8
	54N15SW	Medium Gas Lens Ceramic Cup	7	11	7/16
	54N14SW	Medium Gas Lens Ceramic Cup	8	12.5	1/2
	54N12SW	Medium Gas Lens Ceramic Cup	10	16	5/8
2	54N18	Gas Lens Ceramic Cup	4	6	1/4
	54N17	Gas Lens Ceramic Cup	5	8	5/16
	54N16	Gas Lens Ceramic Cup	6	9.5	3/8
	54N15	Gas Lens Ceramic Cup	7	11	7/16
	54N14	Gas Lens Ceramic Cup	8	12.5	1/2
	54N19	Gas Lens Ceramic Cup	12	19	3/4
3	54N18L	Long Gas Lens Ceramic Cup	4	6	1/4
	54N17L	Long Gas Lens Ceramic Cup	5	8	5/16
	54N16L	Long Gas Lens Ceramic Cup	6	9	3/8
	54N15L	Long Gas Lens Ceramic Cup	7	11	7/16
	54N14L	Long Gas Lens Ceramic Cup	8	12.5	1/2
4	53N89	Large Diameter Gas Lens Ceramic Cup	15	24	15/16
5	57N75	Large Diameter Gas Lens Ceramic Cup	6	9.5	3/8
	57N74	Large Diameter Gas Lens Ceramic Cup	8	12.5	1/2
	53N88	Large Diameter Gas Lens Ceramic Cup	10	16	5/8
	53N87	Large Diameter Gas Lens Ceramic Cup	12	19	3/4
6	57N75L	Large Diameter Gas lens Long Ceramic Cup	6	9.5	3/8
	57N74L	Large Diameter Gas lens Long Ceramic Cup	8	12.5	1/2
	53N88L	Large Diameter Gas lens Long Ceramic Cup	10	16	5/8
	53N87L	Large Diameter Gas lens Long Ceramic Cup	12	19	3/4
7	57N75XL	Large Diameter Gas Lens Extra Long Ceramic Cup	6	9.5	3/8
	57N74XL	Large Diameter Gas Lens Extra Long Ceramic Cup	8	12.5	1/2
	53N88XL	Large Diameter Gas Lens Extra Long Ceramic Cup	10	16	5/8
	53N87XL	Large Diameter Gas Lens Extra Long Ceramic Cup	12	19	3/4

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH



技术参数 Technical Data

电压等级（V） Volatge Grade	L
惰性气体 Inert Gas	氩气 Argon
暂载率 35% Duty Cycle	180/150
钨棒直径 (Φ) Tungsten Rod Dia.	0.5-4.0
冷却方式 Cooling Method	气冷 Air Cooled
颜色 Color	黑 Black
电缆长度 (M) Cable Length	可订做 As required

主要特点 Feature

- 可安装阀门、柔性枪头和带阀门的柔性枪头。
- 可安装两种开关：单控制和双控制开关。
- 具有高绝缘性的橡胶柔性枪头。
- 改装后接头可与所有型式的焊机适配。


- Torch with valve ,flexible torch and flexible torch with valve are available
- Two kinds of switches: single control switch and dual control switch
- Rubber torch with high insulating property
- Suitable for all types of welder after the connector is refitted

氩弧焊焊枪

GAS TUNGSTEN ARC WELDING TORCH

TIG 焊枪 硅橡胶系列 WP-26（技术参数 Technical Data）

额定电流（A)Rated Current	负载持续率（%）Duty Cycle	氩气：流量（1/min）Argon：Gas Flow	冷却方式（Cooling Method）
200	35	9（±5%）	气冷（Air Cooled）

图文代号 NO.		名称 Article	规格 Description
	1	喷嘴 Ceramin Nozzle	4#10N50=6.3*47 5#10N49=8.0*47 6#10N48=9.6*47 7#10N47=11*47 8#10N46=12.5*47 10#10N45 12#10N44
			53N18=6.5*42 53N17=8.0*42 53N16=9.5*42 53N15=11*42 53N14=12.5*42 57N88=16*48 57N87=19.5*48
	2	导流件 Collet Body	10N28=3.2*3/8*32 10N29=0.5*3/8*32 10N30=1.0*3/8*32 10N31=1.6*3/8*32 10N32=2.4*3/8*32
	2.1	网状导流件 Gras Lens Body	45V29 Φ0.5 45V24 Φ1.0 45V25 Φ1.6 45V26 Φ2.4 45V27 Φ3.2 45V28 Φ4.0
	3	夹头 Collet	10N22=1.0*50 10N23=1.6*50 10N2X=2.0*50 10N24=2.4*50 10N25=3.2*50 54N20=4.0*50
	4	下盖 Insulator	CG0002 18CG
	5	主体 Torch Body	WP-26 WP-26V WP-26FV WP-26F WP-26P

图文代号 NO.		名称 Article	规格 Description
	6	长帽 Long Back Cap	BC0066 57Y02
		短帽 Short Back Cap	BC0067 57Y04
	7	手柄套 Tubular Handle	H0005
		TIG 手柄套（橙色）TIG Orange Handle	H007-1
		TIG 手柄套（蓝色）TIG Blue Handle	H007-2
		TIG 手柄套（绿色）TIG Green Handle	H007-3
		TIG 手柄套（黑色）TIG Black Handle	H007-4
	8	微动开关 Micro Switch	东海开关 DongHai Switch
			红旗开关 HongQi Switch
	9	上接头 Top Connector	分体 Separate
			一体 Whole
	10	上接头 Top Connector	帆布布套 Canvas Cover
			橡塑护套 Rubber Cover
			高级波纹护套 Senior corrugated Cover
	11	气管下接头（分体）Gas Nut (Separate)	M16*1.5
			M10*1
			M12*1
			G5/8-18
		气电分体转一体 Saparated Power& Gas to Whole	M16*1.5

图文代号 NO.		名称 Article	规格 Description
	12	航空插 Switch Connector	普通二芯航空插 General 2 Pins Plug
			二芯航空插 2 Pins Plug
			松下航空插 Panasonic Plug
	13 主电缆接头 (Connector for Cable)	板式转换接头 Plate-type Connector	
		线鼻子 Lug	150A
		欧式接头 Water Con-version Plug	10-25# 35-50# 70-95#
		快插接头 Cable Plug	10-25 35-50 50-70 70-95 16# 35# 50# 70# 95#
		十字气开关 Cross Gas Switch	
		螺母接头 Nut	M16*1.5
		外螺纹接头 Nut(Extern-al Thread)	G7/8-14
	14 主电缆管 (Cable Tube)	白优管 Woven Tube	
		耐高温管 High Temp-erature Resistant Tube	
	15 气管 (Gas Hose)	橡塑管 Rubber Hose	5*8 黑色 Black

超特®

常州市超特焊割设备有限公司

Changzhou Chaote Welding Cutting Equipment Co.,Ltd.

电话：+86-177 0614 0357

Whatsapp：17706140357

Facebook：8617706140357

Email:

地址：常州市武进区遥观镇通济村石桥里42号